

Wexford County Council

Holmestown Waste Management Facility
W0191-02

Annual Environmental Report 2016

Quality Control Sheet

Publication title Annual Environmental Report for Holmestown Waste Management Facility

Date March 2017

Address: Wexford County Council
County Hall,
Wexford.

Sean Meyler, Facility Manager

Tel 053-9120922
Mob 087-6846089
Email sean.meyler@wexfordcoco.ie

Issue Record

Doc No.	Issue No.	Reason for Issue	Author	Approved
HOLM191_EPA_2016 AER	1	Compliance with Waste Licence W191-02	Fran Hobbs Facility Technician Billy Byrne Facility Supervisor	Sean Meyler Facility Manager

EXECUTIVE SUMMARY

This *Annual Environmental Report* has been prepared for Holmestown Waste Management Facility, Waste Licence W0191-02, for the reporting period from **1 January 2016 to 31 December 2016 inclusive**. The report includes the information specified in Schedule H of the Waste Licence, Content of the Annual Environmental Report, in accordance with Waste Licensing - *Draft Guidance on Environmental Management Systems (EMS) and Reporting to the Agency, 1999*. The main topics discussed within this report are as follows:

- General Site Information
- Management and Staffing
- Reported Incidents and Complaints
- Development Works
- Waste Acceptance and Handling
- Emissions Management
- Environmental Nuisances
- Resource and Energy Consumption
- Environmental Monitoring and Emissions

The waste management facility commenced accepting waste on site on 29 April 2008 in the northern end of the landfill, namely Cells 3 + 4 in Phase 1, being used first. The waste management facility temporarily ceased accepting waste on 21st May 2012. No waste has been accepted for landfilling at the facility since then. Therefore, the total quantity of waste accepted for landfill at the facility for the reporting period 1st January to 31st December 2016 was 0 tonnes.

An environmental management system was prepared for Holmestown Waste Management Facility in October 2008 consisting of the following elements:

- Schedule of Environmental Objectives and Targets
- Environmental Management Plan
- Corrective Action Procedures
- Awareness and Training Programme

A number of objectives and targets were developed for the facility which are reviewed and updated where appropriate on an annual basis.

The majority of engineering works associated with the general development of the site including the preparation of Phase 1, Cells 1-4, were completed from 2006-2008. The installation of the twin gas lines from phase 1 to the enclosed gas flare and other minor operational works were completed in 2009.

The enclosed flare was commissioned in August 2009 and put into permanent operation in September 2009. Horizontal and vertical gas management infrastructure has been installed in cells 1, 2, 3, and 4. The volumes of landfill gas extracted varied from 156 m³/hr to 50 m³/hr during the reporting period. Gas extraction rates were optimised in 2016 to minimise odours. The gas quality remained varied during the reporting period with concentrations from 20.9% CH₄ up to 25.6% CH₄. The 500m³ flare stack was replaced with a 150m³ flare stack in August 2016.

The construction of the Phase 2 landfill cells commenced in June 2010 and was completed in December 2010.

The Phase 2 landfill footprint encompasses approximately 17,500 m². Lining of the cells involved the placing of approximately 16,600 m³ of engineered clay and the laying and welding of approximately 17,500 m² of HDPE liner. A 500 mm stone drainage blanket was laid on the cell floors with a protective geotextile placed on the cell side slopes.

Wexford County Council carried out a comprehensive environmental monitoring programme during 2016 in compliance with the waste licence conditions. The monitoring programme incorporated Landfill Gas, Leachate Level & Quality, Surface Water Quality, Groundwater Level & Quality, Noise, Dust, Odour, Meteorological and topographical surveys (Sept 2016 Justin Kelly). Results to date suggest that there is no notable pollution from operational activities.

There were a number of recurring category 3 incidents in 2016. These were related to:

- peripheral gas wells;
- groundwater monitoring;
- noise.

The elevated gas and groundwater results were detected pre-landfilling and are not related to site operations. Reports to date have summarised that the elevated results recorded are due to naturally occurring elements in the site soils.

The elevated noise readings were also not attributed to site operations. Noise reports commented that all the elevated readings were caused by either the N25 or local noises in close proximity to the sampling device (e.g. birdsong, dog barking etc.).

Reports have been submitted to the EPA that review peripheral gas, groundwater and surface water pond results and provide proposals for control and trigger levels where applicable.

No complaints were received by WCC or the EPA during this reporting period.

Contents Page

Annual Environmental Report 2016	1
EXECUTIVE SUMMARY	3
1 INTRODUCTION	3
1.1 General Information	3
1.2 Site information	3
2 MANAGEMENT & STAFFING STRUCTURE	4
2.1 Management and staffing structure for Holmestown Waste Management Facility	4
2.2 Financial provisions	5
2.3 Review of Environmental Liabilities	5
2.4 Environmental Management System	6
3 REPORTED INCIDENTS & COMPLAINTS SUMMARIES	12
3.1 Incidents	12
3.2 Complaints	13
4 DEVELOPMENT WORKS UNDERTAKEN DURING THE REPORTING PERIOD & THOSE PROPOSED FOR THE COMING YEAR	14
4.1 Landfill Engineering Works	14
4.2 Restoration and Aftercare	15
5 WASTE ACCEPTANCE & HANDLING	17
5.1 Waste Activities carried out at the Facility	17
5.2 Waste Acceptance and Handling Procedures	17
5.3 Waste Deposition	17
5.4 Total quantity of wastes accepted on site	17
5.5 Total Quantity of Waste Consigned Off Site	17
5.6 Remaining capacity of the site	18
5.7 Area occupied by waste	18
6 EMISSIONS MANAGEMENT	19
6.1 Landfill Gas Management	19
6.2 Leachate, Groundwater and Surface Water Management	19
7 ENVIRONMENTAL NUISANCES	24
7.1 Review of environmental nuisance control at the facility for the reporting period	24
8 RESOURCE & ENERGY CONSUMPTION	26
8.1 Electricity and Energy Usage	26
8.2 Water	26

8.3	Diesel	26
9	EMISSIONS & ENVIRONMENTAL MONITORING SUMMARY	27
9.1	Emissions and environmental monitoring	27
9.2	Monitoring	28
9.3	Emissions Monitoring:	28
9.4	Environmental Monitoring	31

APPENDICES

- A. PRTR 2016
- B. Staff Training
- C. Monitoring Results and Graphs
- D. Meteorological Data Graphs
- E. Summary of waste accepted and consigned off-site
- F. Water Balance Calculation Spreadsheet
- G. Drawings

1 INTRODUCTION

1.1 General Information

The Annual Environmental Report (AER) for Holmestown Waste Management Facility includes as a minimum the information specified in Schedule H of the Waste Licence W0191-2, *Content of Annual Environmental Report*.

The AER has been prepared in accordance with the Environmental Protection Agency (EPA) publication *Waste Licensing – Draft Guidance on Environmental Management Systems (EMS) and Reporting to the Agency, 1999* and further guidance provided on the EPA website. This document is the sixth AER prepared for the site.

The reporting period for this AER is **1 January 2016 to 31 December 2016 inclusive**.

1.2 Site information

Table 1 Site information on Holmestown Waste Management Facility







HOLMESTOWN WASTE MANAGEMENT FACILITY	
Waste licence register no:	W0191-02 (revised date 24/03/2010)
Name and address of operator:	Wexford County Council County Hall Carricklawn, Wexford.
Name and address of facility:	Holmestown Waste Management Facility Barnstown Wexford
Site Description:	Holmestown Waste Management Facility is located within the town lands of Holmestown Great, Glenduff, Bolgerstown, Muchwood and Ballyeaton, approximately 8 kilometres west from Wexford Town (National Grid Reference 2973, 1230). The site which lies to the north of the N25, Wexford to New Ross road comprises an area of approximately 63 hectares of which 15 hectares will be used for landfilling and is situated within a mixed forested plantation of mainly coniferous trees known as Holmestown Wood. The property is bounded by agricultural lands to the North, South, East and West. The land use in the surrounding area is good quality grazing and is intensely farmed to the west, north and east by dairy and livestock farmers. There are a number of dwellings surrounding the site including farmhouses, residences and a nursing home. The site is within the catchment of the Slaney River, and a number of small streams drain the site to the Slaney, less than 2km away. A site location map is provided as Appendix G .


2 MANAGEMENT & STAFFING STRUCTURE

2.1 Management and staffing structure for Holmestown Waste Management Facility

Management Structure for Holmestown Waste Management Facility on 31st December 2016

Key

-  Management
-  Weighbridge
-  Civic Amenity
-  Civic Amenity/Landfill
-  Landfill
-  Rapid Response

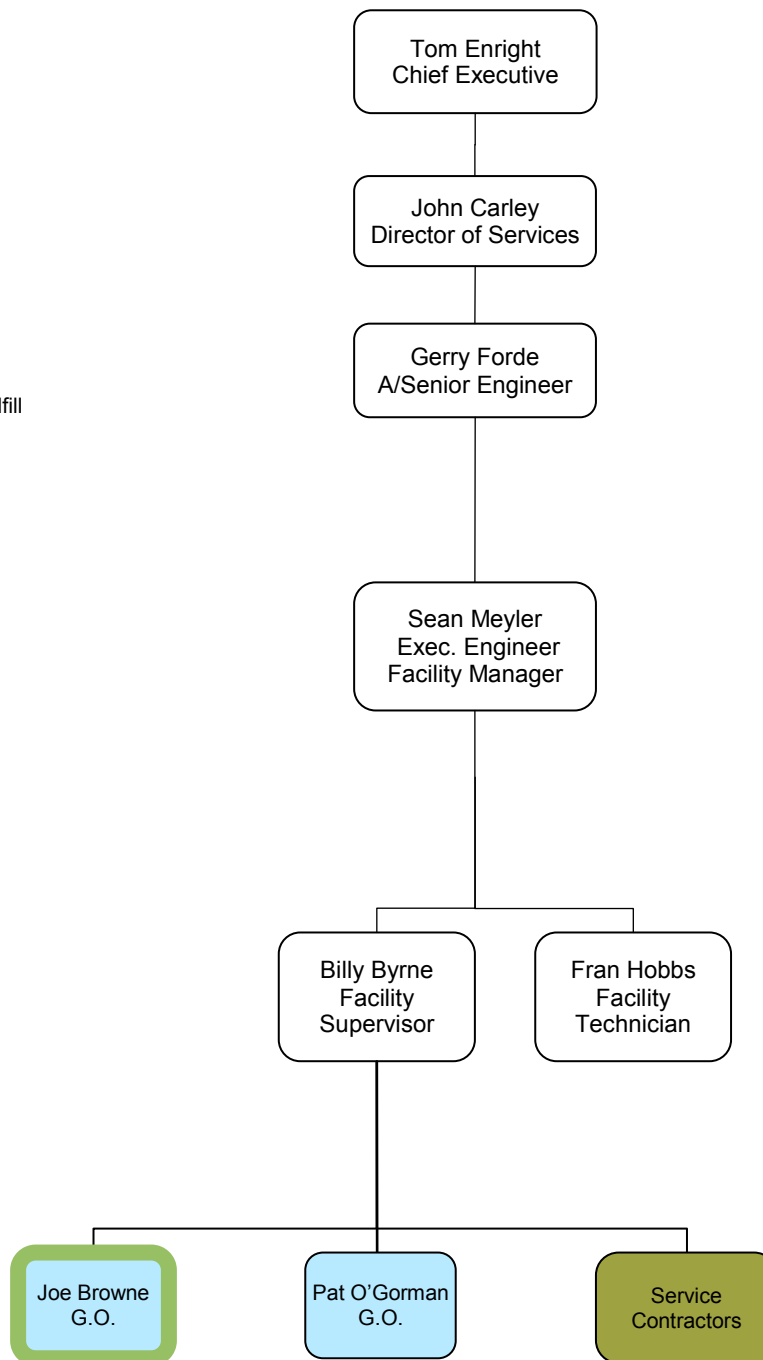

The Holmestown waste management facility was operated by Wexford County Council during 2016 with consultancy support provided by sub consultants including RPS and Fehily Timoney & Company and service contractors including Response Engineering Ltd ,Irish Biotech Services and Automatic Flare Systems Ltd.. Details of the management structure during the reporting period for the facility are provided above.

2.2 Financial provisions

In accordance with Condition 12.1 Wexford County Council paid a sum of €13,036 to the Environmental Protection Agency for the management and monitoring of the waste licence.

2.2.1 Provision for the Closure, Restoration and Aftercare

Wexford County Council (WCC), as a Local Authority, has made the necessary provisions, for the development, management, restoration and aftercare of Holmestown Waste Management Facility. WCC has assigned a full time permanent engineer for the management of the facility. Wexford County Council is committed to the ongoing provision of funding for all site development works, environmental monitoring costs and restoration and aftercare works at Holmestown Landfill for the duration of the Waste Licence, and has made financial provision as presented in the Environmental Liabilities Risk Assessment (see 2.3 below and Appendix H).

2.2.2 Community Support and Development

An environmental monitoring committee (EMC) was established in July 2005 and includes two members of the Barntown Environmental Alliance, two elected members of Wexford County Council and two Wexford County Council officials. The Committee meets periodically – less frequently than when the landfill was fully operational. A community support and development fund has been set up by Wexford County Council.

2.3 Review of Environmental Liabilities

Condition 12.2.2 states the licensee shall arrange for the completion of a Environmental Liabilities Risk Assessment (ELRA) to address the liabilities from past and present activities. WCC engaged the services of Fehily Timoney and Company, consulting engineers, to undertake this assessment. The ELRA was completed in July 2013 and issued to the EPA via the Eden system.

In September 2015, the EPA responded to seek submission of an updated ELRA and CRAMP to take account of their newly published guidelines "*Guidance on Assessing and Costing Environmental Liabilities 2014*". WCC submitted the revised ELRA in December 2014 and the revised CRAMP in January 2015. WCC submitted a further revision of the ELRA in March 2015 to correct some earlier minor discrepancies.

The ELRA approach is a standard risk assessment that involves the assessment of the likelihood of occurrence of an event in combination with the consequences of that event. This is followed by the costing of the plausible worst case scenario for the purposes of informing the level of financial provision (cover) necessary. The projected worst-case scenario for Holmestown is landfill fire. Costs associated with such an event are estimated at **€671,440 (excluding VAT)**.

2.4 Environmental Management System

Condition 2.3 requires the licensee to establish and maintain an Environmental Management System (EMS) at the facility. The site environmental management system was prepared in October 2008 and revised in 2010. The EMS consists of the following elements:

- Schedule of Environmental Objectives and Targets
- Environmental Management Plan
- Corrective Action procedures
- Awareness and training Programme

2.4.1 Environmental Objectives & Targets – Progress

The Environmental Objectives and Targets for the period January 2012 to December 2012 and details of progress made regarding each objective are detailed in Table 2 and 3 hereafter. In summary the objectives and targets established include the following;

- Objective No 1: Operate facility in accordance with the conditions of the waste licence and promote continual environmental improvement
- Objective No 2: Improve Environmental Performance of the facility by maintaining a comprehensive monitoring regime
- Objective No 3: Maximise recycling levels within the civic amenity and site office
- Objective No 4: Promote energy efficiency on site and in the site offices
- Objective No 5: Minimisation of Complaints

2.4.2 Environmental Management Plan

An environmental management plan (EMP) was prepared and as part of the EMS in October 2008 and reviewed in January 2010. The EMP comprises information on the following topics:

- Site description
- Site infrastructure
- Types of waste accepted on site
- Civic amenity site
- Leachate Collection and treatment Leachate Management System
- Landfill Gas Abatement Methods
- Surface water Control Measures
- Environmental Monitoring
- Site Security and Site Offices
- Operational Matters
- Noise and dust abatement
- Vermin and litter control
- Fires
- Restoration and Aftercare

2.4.3 Corrective action Procedure

Procedures are in place in accordance with Condition 2.3.2.3 of the licence to monitor, measure, audit and record the environmental performance of the environmental management system. These procedures establish how non-conformance within the system is dealt with and how any corrective and preventive action is carried out. A corrective action procedure was prepared in October 2008 and included in the overall EMS report.

2.4.4 Awareness and Training Programme

In accordance with Condition 2.3.2.4 of the licence, an awareness and training programme has been developed to increase environmental awareness among staff and identify training needs of all personnel working at Holmestown waste management facility. The facility manager has overall responsibility for reviewing training needs on an annual basis to ensure that all staff have the necessary skills and level of awareness to carry out their duties to the highest environmental and safety standards. A training schedule summarizing staff training proposals for 2016 is included in Appendix B.

Table 1 Achievement of Objectives and Targets for 2016

Achievement of Objectives and Targets for 2016			
	Comments	Target	Progress
Objective No 1: Operate facility in accordance with the conditions of the waste licence and promote continual environmental improvement			
1.1 To prevent recurrence of leachate-related incidents that occurred during 2014	<ul style="list-style-type: none"> • Ensure strict controls are in place if pumps are operated in manual mode • Assess feasibility of temporary capping using proprietary artificial lining materials 	<p>Continuous</p> <p>Summer 2016</p>	<p>Successful and ongoing</p> <p>Complete. Deemed not feasible in light of possible plan to decommission site.</p>
Objective No 2: Improve environmental performance of the facility by maintaining a comprehensive monitoring regime			
2.1 Regularly review environmental monitoring data and monitor changes in trends	<p>Conduct monitoring, as a minimum in accordance with the waste licence</p> <p>Maintain trend analysis graphs for 2016, interrogate and interpret this data.</p> <p>Make improvements where the need is identified</p>	December 2016	<p>Ongoing. No required improvements identified.</p>
Objective No 3: Progress implementation of polluter-pays principle at the civic amenity			
3.1 Introduction of pay-by-weight for residual waste in 2016	Need to install new entry control, weighing system, payment system and data management system	July 2016	In abeyance due to postponement of regulations until July 2017 at earliest.
Objective No 4: Enhance Protections to Groundwater			
4.1 Implement any Recommendations in GW technical	To be agreed with the Agency	December 2016	Report complete.

Achievement of Objectives and Targets for 2016			
	Comments	Target	Progress
Assessment report			Implementation of recommendations is outstanding.
Objective No 5: Enhance Protections to Air			
5.1 Complete downsizing works to the landfill gas flare	This proposal has previously been approved via SEW to the EPA	June 2016	Works completed in 2016
Objective No 6: Accelerate waste decomposition and reduce long-term environmental liability			
6.1 Commence leachate recirculation	Subject to SEW approval	July 2016	This was not approved by the Agency prior to completion of capping.

Table 2 Objectives and Targets for 2017

Objectives and Targets for 2017			
	Comments	Target	Responsibility
Objective No 1: Operate facility in accordance with the conditions of the waste licence and promote continual environmental improvement			
1.1 To prevent recurrence of leachate-related incidents that occurred during 2014	<ul style="list-style-type: none"> • Ensure strict controls are in place if pumps are operated in manual mode • Keep strict watch on leachate levels in cells and leachate treatment plant capacity during periods of heavy rainfall 	Continuous	Facility Manager

Objectives and Targets for 2017			
	Comments	Target	Responsibility
Objective No 2: Improve environmental performance of the facility by maintaining a comprehensive monitoring regime			
2.1 Regularly review environmental monitoring data and monitor changes in trends	Conduct monitoring, as a minimum in accordance with the waste licence Maintain trend analysis graphs for 2016, interrogate and interpret this data. Make improvements where the need is identified	December 2017	Facility Technician & Manager
Objective No 3: Progress implementation of polluter-pays principle at the civic amenity			
3.1 Introduction of pay-by-weight for residual waste in 2017	Subject to government policy and making of regulations	July 2017 (TBC)	Facility Supervisor & Manager
Objective No 4: Enhance Protections to Groundwater			
4.1 Implement any Recommendations in GW technical Assessment report	To be agreed with the Agency	December 2017	Facility Manager & technician
Objective No 5: Assess Feasibility of Decommissioning of Site			
5.1 Complete feasibility study which will examine excavation of the waste and removal for alternative disposal/recovery	Our consultants are currently working on this study	May 2016	Facility Manager

2.4.5 Full title of any procedures developed by the licensee in the year which relates to the facility operation

During the reporting period January – December 2016 no new site procedures were developed at the facility. All procedures are kept on file at the site office and all staff are made fully aware of new/revised procedures as they are developed. The procedures developed for the site are as follows:

- HWMF001 Waste Acceptance Procedure rev.2
- HWMF002 Waste Handling Procedure
- HWMF003 Communications Procedure
- HWMF004 Environmental Records Procedure
- HWMF005 Corrective Action Procedure
- HWMF006 Leachate Handling Procedure
- HWMF007 Emergency Response Procedures
- HWMF008 Firewater Risk Retention assessment
- HWMF009 Entering onto private property procedure
- HWMF010 Civic Amenity procedures
- HWMF011 Weighbridge procedures
- HWMF012 Fire Evacuation - Emergency Procedure
- HWMF013 Accident and reporting procedure

2.4.6 Report on communication programme

In accordance with Condition 2.4.1 of the waste licence a communications programme has been developed at the facility. An environmental monitoring committee convenes periodically to discuss a range of matters relating to the management and operation of the waste management facility. In addition Wexford County Council provides the following documentation for public access at the site office and at Wexford County Hall:

Table 3 List of records available for public access in relation to the landfill

List of records available for public access
Waste Licence W00191-2
Waste Licence application
Correspondence with the EPA
Incident / complaints records
Audit records
Waste acceptance records
Rejected waste records
All monitoring records
Surface water inspection forms
Leachate removal records
Bird / vermin control reports

3 REPORTED INCIDENTS & COMPLAINTS SUMMARIES

3.1 Incidents

A recurring category 3 incident which was initially reported to the EPA on 11 January 2008 relating to the detection of carbon dioxide and methane gas at a number of gas monitoring boreholes continued to be in exceedence of its trigger level during the period January to December 2016.

Monitoring of gas wells was carried out between September 2007 and March 2008. Naturally occurring methane and carbon dioxide were regularly detected in a number of boreholes located outside the perimeter of the constructed lined cells during routine monitoring on site prior to waste acceptance. As a means of investigating these recurring gas levels the EPA requested that an investigation be carried out on site, this was undertaken between March and April 2008.

The investigation found existing levels of naturally occurring methane and carbon dioxide in the area as a result of the breakdown of organic material in the soil. An assessment was carried out and the risk associated with naturally occurring methane and carbon dioxide on the site was deemed not to be significant due to the underlying geology of the area. The presence of clay which has a low permeability acts as a natural containment material preventing gas from travelling through the ground for any considerable distance. The cells are also fully lined with a double liner system consisting of a geocomposite liner on top of an engineered clay liner. A number of recommendations were made to monitor and manage the landfill in the absence of perimeter gas wells through maintaining a negative pressure within the waste body. Two reports were submitted to the EPA during April and December 2008 entitled:

- Investigation of Naturally Occurring Background Gas Levels at Holmestown Landfill – Risk Assessment and Recommendations. (Revision 1)
- Investigation of Naturally Occurring Background Gas Levels at Holmestown Landfill – Risk Assessment and Recommendations – Trace Gas Analysis. (Revision 2)

A review of the peripheral gas borehole results as recommended in previous reports has been completed. The review incorporates all results to the end of 2009. This report will form the basis for future works/monitoring.

Another recurring category 3 incident was the exceedence of trigger levels for groundwater boreholes. Results were outside Interim Guideline Values in a number of the on-site groundwater boreholes tested. The elevated values date back to pre-landfilling and have been recorded both upstream and downstream of the landfill footprint. Similar to gas readings the elevated results are prevalent downstream in the north east corner where the bulk of the on site excavation works were carried out and appear to be due to a non-landfill source in the soil. The main soil mass is low permeability clay with sand and gravel lenses. Groundwater movement in the soil zone is relatively slow resulting in low flows. This enables emissions to build up locally around a source as appears to be indicated from the results.

Subsequent to ongoing interim trigger level exceedences, a report reviewing all groundwater data to the end of 2009 was completed and submitted to the EPA.

Exceedences of noise trigger levels were also noted during the reporting period. The excessive noise was attributed to traffic on the N25 roadway or local noise sources (dogs barking etc.) during monitoring for all the monitoring locations that tested above the licence limit.

3.2 Complaints

No complaints were received during this reporting period.

4 DEVELOPMENT WORKS UNDERTAKEN DURING THE REPORTING PERIOD & THOSE PROPOSED FOR THE COMING YEAR

4.1 Landfill Engineering Works

Condition 3.1 of the licence states that the licensee shall establish all infrastructure referred to in the licence prior to the commencement of the licensed activities or as required by the waste licence. In accordance with Condition 3.2 proposals for all Specified Engineering Works reports (SEW's) have been submitted to the Agency for approval. A list of these reports to date is as follows. Due to a numbering error SEW No. 7 was omitted i.e. next report after SEW No. 6 is in fact SEW No. 8.

- SEW Report No. 1: Development of the facility including preparatory works and lining – October 2005
- SEW Report No. 2: Installation of the Civic Amenity Facility – October 2005
- SEW Report No. 3: Installation of the Landfill Gas System – October 2005
- SEW Report No. 3A: Installation of the Landfill Gas System (Revised) – September 2007
- SEW Report No. 4: Installation of the Leachate Management System – October 2005
- SEW Report No. 5: Installation of the Groundwater Control Infrastructure – October 2005
- SEW Report No. 6: Installation of the Surface Water Management Infrastructure – October 2005
- SEW Report No. 8: Installation of Clay Liner – February 2007
- SEW Report No. 9: Access to Additional Cells – July 2008
- SEW Report No. 10: Landfill Cell Development Phase 2 – April 2009

4.1.1 Completed Engineering Works to end of 2016

The majority of engineering works associated with the general development of the site including the preparation of Phase 1, Cells 1-4, were completed during 2006 and 2007. During the latter part of 2008 engineering works associated with the completion of contract 3 and snagging works were completed. During 2009 the installation of the twin gas lines from phase 1 to the enclosed gas flare and other minor operational works was completed. Landfill Cell Development Phase 2 commenced in June 2010 and was completed in December 2010. A description of minor engineering works completed at Holmestown Waste Management facility during 2016 is as follows:

Table 4 Summary of Engineering Works 2016

Start Date	Development Works
August	○ Downsizing of landfill gas flare from 500m ³ /hr to 150m ³ /hr
September	○ Connection of 9 gas wells to gas extraction system

4.1.2 Proposed Engineering Works 2017

A description of engineering works proposed at Holmestown Waste Management Facility for 2017 is as follows:

Table 5 Summary of Proposed Engineering Works 2017

Start Date	Development Works
August	○ Maintenance works to site roads
September	○ Maintenance works to drains/channels

4.2 Restoration and Aftercare

No permanent capping works were carried out on site during 2016.

5 WASTE ACCEPTANCE & HANDLING

5.1 Waste Activities carried out at the Facility

In accordance with Schedule A of the Licence, Holmestown Waste Management facility is licensed to accept 80,000 Tonnes of waste per annum. This includes 55,000 Tonnes of non-hazardous household and commercial waste, 5,000 Tonnes of waste for composting, 8,000 Tonnes of construction and demolition waste for recovery and 12,000 Tonnes of household and commercial waste for recovery.

Both waste recovery and disposal operations took place on site at Holmestown Waste Management facility during 2016.

5.2 Waste Acceptance and Handling Procedures

Holmestown Waste Management facility opened in April of 2008, as a replacement landfill for Killurin which ceased accepting waste on site at the end of June 2008. The facility temporarily stopped accepting waste on 21st May 2012. Waste has been placed in cell's 1, 2, 3 & 4 of Phase 1 which is at the northern end of the landfill footprint.

5.3 Waste Deposition

As the facility temporarily stopped accepting waste on 21st May 2012 no waste was brought to the active tipping face during the reporting period.

All waste consigned off-site during 2016 was disposed of to facilities licensed or permitted to accept or treat that waste. Transport of waste was carried out in accordance with the *Waste Management (Collection Permit) Regulations, SI 820 of 2007*, and Amendment Regulations, *SI 87 of 2008* as appropriate.

5.4 Total quantity of wastes accepted on site

As the facility temporarily stopped accepting waste on 21st May 2012 no waste was accepted for landfill at the facility for the reporting period 1st January to 31st December 2016.

980 tonnes of leachate was accepted from Killurin Landfill (W0016-02) for pre-treatment at Holmestown leachate treatment plant during 2016.

5.5 Total Quantity of Waste Consigned Off Site

The total quantity of waste consigned off site at Holmestown Waste Management Facility for the reporting period 1st January to 31st December 2016 was 1703 tonnes.

A summary of the total quantity of waste consigned off site for the reporting period is presented below in Appendix E.

The total volume of leachate sent off site for further treatment at Wexford Wastewater Treatment Works was estimated at 19,388 tonnes. This is inclusive of the 980 tonnes imported from Killurin.

5.6 Remaining capacity of the site

The most recent void calculation indicates a remaining landfill capacity of approximately 1.1million tonnes remaining for waste, net of allowances for cover.

5.7 Area occupied by waste

A topographical survey completed in March 2011 showed the area of waste present within Cells 1, 2, 3 and 4 to be 18,132m². The overall area where waste will be land filled is approximately 15.2 ha (152,000 m²).

6 Emissions Management

6.1 Landfill Gas Management

The installation of the landfill gas control system is an ongoing process with the connection of nine gas wells to the system in November 2016. Horizontal and vertical infrastructure was placed concurrent with waste. The pipe work systems are connected to a 150m³ enclosed gas flare. The enclosed flare was commissioned and put into permanent operation in August 2016 replacing the 500m³ enclosed flare which operated from September 2009 to August 2016.

More detailed information on the landfill gas extraction system installed to date on site can be found in the following report which can also be viewed on file in the site office:

- *SEW Report No. 3A: Installation of the Landfill Gas System (Revised) which was submitted to the EPA in September 2007*

6.1.1 **Estimated annual and cumulative quantities of landfill gas extracted from the site.**

The volumes of landfill gas extracted varied from 156m³/hr to 50m³/hr during the reporting period. Gas extraction rates have been maximised to minimise odours. The gas quality varied during the reporting period from 20.9% CH₄ up to 25.6% CH₄. The total volume of CH₄ flared on site during 2016 was 175,583 m³ recorded by SCADA system. The cumulative volume from commencement of flaring to the end of 2016 was 3,368,179m³.

We have installed infrastructure in accordance with best practice to ensure that gas capture is maximised. We are confident from the absence of odour in and around the site and by maintaining a negative pressure in the landfill that gas capture at HWMF is satisfactory.

6.2 Leachate, Groundwater and Surface Water Management

6.2.1 **Leachate**

Leachate is generated by incident rainfall seeping into the landfill and becoming contaminated by contact with the waste product, and by the decomposition of the waste itself. Other potential sources of leachate generation, such as groundwater and surface water ingress are prevented from entering the waste fill areas through a number of site specific engineering works.

Leachate from Cells 1, 2, 3 & 4 is pumped directly to the leachate treatment plant using the in-cell submersible pumps. From the leachate treatment plant final effluent tank the pre-treated leachate is pumped to the Wexford Town Wastewater Treatment Plant for final treatment and disposal. It should be noted that occasionally, during periods of persistent heavy rainfall, it becomes necessary to remove untreated leachate from site by tanker.

The on-site leachate treatment plant was commissioned during 2009 and began to accept leachate directly from Phase 1 for treatment. The treatment plant provides a capacity of approximately 1200 m³, equivalent to a process retention time of 15 days at the maximum flow (average estimate is 50m³ per day, estimated peak flow is 80m³ per day). The plant comprises of the following main elements, together with ancillary pipe work to convey the leachate between tanks:

- ◆ 2 x Sequencing batch reactor (SBR);
- ◆ Treated leachate balance tank (TLBT);
- ◆ Raw leachate feed pump;

- ◆ Venturi aerators;
- ◆ Decant pump;
- ◆ Final discharge pump;
- ◆ Alkali dosing facilities; and
- ◆ Nutrient dosing facilities.

In January 2015, off-site pumping of treated leachate to sewer commenced, supplemented by occasional periods of tankering of untreated leachate off-site to Wexford WWTP during periods of excess rainfall.

Monthly volumes of leachate discharged off site are presented in Table 6 below. In August 2015, importation of leachate from Killurin (W0016-02) for treatment at Holmestown commenced. The table below takes account of imported Killurin leachate during 2016.

Note – volumes generated at Holmestown are estimates, based on a water balance calculation. When we ran reports for the year, it became apparent that our SCADA system was reporting volumes much higher than was possible from incident rainfall. We understand that the problem is due to a faulty setting on the SCADA system, as the flowmeters have recently (in early 2017) been tested and passed for calibration. Thus the problem will be corrected going forward, but it is not possible to correct them retrospectively.

It should be noted that the variance between our water balance calculation and actual measured leachate in 2015 was minuscule, so the estimates given below for 2016 are likely to be very accurate.

Table 6 Leachate volumes removed from site in 2016

Month	A Tankered off site HWMF (m ³)	B Imported from Killurin (m ³)	C-A Est Pumped off site HWMF (m ³)	B+C Est Total Off Site Volume (m ³)	C Est Volume Generated at HWMF(m ³)
January	1,289	109	1,181	2,579	2,470
February	0	431	1,810	2,241	1,810
March	0	0	951	951	951
April	0	0	1,373	1,373	1,373
May	0	87	1,222	1,309	1,222
June	0	153	1,625	1,778	1,625
July	0	92	767	859	767
August	0	0	1,076	1,076	1,076
September	0	0	1,940	1,940	1,940
October	0	0	1,262	1,262	1,262
November	0	0	770	770	770
December	0	108	2,022	2,130	2,022
HWMF Wastewater			120	120	120
Carry over from 2015			1,000	1,000	1,000
Total	1,289	980	17,119	19,388	18,408

Integrity testing of leachate storage tanks in the leachate treatment plant is next due in 2017.

6.2.2 Groundwater

Condition 3.10 of the licence states that effective groundwater management infrastructure shall be provided and maintained at the facility during construction, operation, restoration and aftercare of the facility. As a minimum, the infrastructure is required to be capable of the following:

- Protection of groundwater resources from pollution by the waste activities
- Protection of other infrastructure, such as the liner; from any adverse effects caused by groundwater.

At Holmestown Waste Management facility the cell formation levels have been designed so that the formation levels will be a minimum of 2m above the expected winter water-table levels. The nature of the excavation elsewhere on site is shallow so groundwater is not expected to be encountered.

Groundwater resources are protected from waste related pollution by the construction of a quality-assured composite lining system, which comprise the following:

- ◆ 1,000 mm compacted engineered clay with hydraulic conductivity (k) $\leq 1 \times 10^{-9}$ m/sec; overlain by
- ◆ 2 mm fully-welded HDPE liner.

Leachate arising from waste activities is contained within the landfill by the lined system and conveyed to the on-site leachate treatment plant via sealed pipe systems. Treated leachate is currently tankered off site to Wexford Town Wastewater Treatment Plant for final treatment and disposal. Effluent will eventually be removed from site via a pumped rising main to Wexford Wastewater Treatment Plant as outlined in *Specified Engineering Works Report No. 4*. There is no discharge to groundwater from any aspect of the landfill development.

Foul water drains to a proprietary wastewater treatment plant on site. Effluent from the wastewater treatment plant discharges to the leachate treatment plant.

6.2.3 Surface Water

In accordance with the licence conditions (condition 3.10); surface water is collected on site via a network of drains, and is fed into the surface water collection pond to the north of the site at SWP1. The water settles in the pond and is then released to a petrol interceptor tank via SWP2. From there the surface water flows in an easterly direction to the stream on the east of the site, and enters the stream at SW4.

The following describes the various aspects of surface water collection systems:

- All clean surface water from paved roads and roofed areas on site drains into the constructed surface water drainage system and drains to the surface water pond via carrier pipes and open channels.
- Dirty surface run-off from the civic amenity area is collected in gullies, and drains and diverted to the leachate treatment plant via a splitter chamber and carrier pipe.
- Surface water run-off from the screening berm at the north end of the site is collected by a number of embankment swales and directed to the surface water pond.
- Surface water in constructed landfill cells in which the filling with waste has not yet commenced is pumped to the surface water pond.

The surface water pond located to the north east of the landfill is lined with a 1 m thick layer of clay, engineered to ensure a maximum permeability of 1×10^{-9} m/sec. The pond is designed to attenuate peak flows up to a 1 in 100 year return period, and to fully contain peak flows up to a 1 in 5 year return period. The pond is designed to cater for the worst case scenarios during the lifetime of the entire landfill. The allowable discharge from the pond has been reduced below baseline flow levels in order to enable water settlement and achieve suspended solids content less than 25 mg/l.

6.2.4 Water Balance Calculations

The objective of water balance calculations is to understand and predict and reconcile the liquid inputs and outputs of the facility. In order to predict the approximate leachate volumes which would be generated on-site, water balance calculations have been calculated for the period 1st January 2016 to 31st December 2016 to estimate the approximate volume of leachate that was generated during the reported period. This volume can then be compared to the volume of leachate leaving site, by tanker over the weighbridge or by rising main to sewer. This comparison is not possible for 2016 due to unreliable reporting by our SCADA system.

The water balance addressed the volume of leachate generated at the site including the estimated annual infiltration of rainfall. The water balance methodology is described below and the calculation is shown in Appendix F.

The water balance calculations are based on the methodology specified in the EPA's Landfill Site Design Manual. The calculation used is as follows: -

$$Lo = [ER(A) + LW + IRCA + ER(I)] - [aw]$$

Lo = leachate produced (m³)

ER = effective rainfall (m) (Use actual rainfall (R) for active cells)

A = area of cell (m²)

LW = liquid waste (m³)

IRCA = infiltration through restored and capped areas (m)

I = surface area of lagoon (m²)

a = absorptive capacity of new waste (m³/t)

w = weight of waste deposited (t/a)

An absorptive capacity of 0.025 m³ per tonne was assumed.

The meteorological data used was obtained from the nearby Met Eireann meteorological station at Johnstown Castle. The total rainfall from 1st January 2016 to the 31st December 2016 was approximately 995 mm. Meteorological data is presented in Appendix D.

Phase 1 (18,700m²) was the only part of the landfill contributing to leachate generation in 2016. The entire Phase 1 area is covered with a temporary cap. An 89% infiltration rate was used in the 2016 AER (as per 2014 and 2015 infiltration rate) for temporary restored areas. Given that no fresh waste was emplaced during 2016, the absorptive capacity of waste was ignored.

In addition, the water balance takes account of other 'dirty' areas of the site that drain to the leachate treatment plant, namely the weighbridges, wheelwash, waste inspection/quarantine bays and the leachate treatment plant pavement. We have also made an allowance to take account of wastewater generated on site by facility staff.

The estimated volume of leachate generated at Holmestown for the period 1st January 2016 to the 31st December 2016 is 17,287m³ (a calculation summary is included in Appendix F). In addition, an estimated 120m³ of wastewater was generated from staff accommodation. As referenced in our 2015 AER, on the morning of 1st January 2016, there was an estimated 1,000m³ of leachate in the system (between the landfill cells, raw water tanks, SBRs and final effluent tank). This volume is added to the above figures to give the total of Holmestown generated leachate that was conveyed from site for further treatment during 2016 – a total amount of 18,407m³.

A monthly breakdown of leachate volumes removed is presented in Table 6 above.

7 ENVIRONMENTAL NUISANCES

7.1 Review of environmental nuisance control at the facility for the reporting period

Condition 8.15 of the Waste Licence states that the licensee will inspect the facility and its immediate surrounds for nuisances caused by litter, vermin, birds, flies, mud, dust and odours. Nuisances at Holmestown Waste Management facility are logged in a weekly tick-box report and action is taken immediately to address any identified issues. Table 8 below summarises the measures implemented on site to combat environmental nuisances during 2016.

Condition 7.3 of the Waste Licence states that litter fencing shall be installed and maintained around the perimeter of the active tipping area prior to the disposal of waste in any cells and that all litter control infrastructure shall be inspected on a daily basis. A litter fence was maintained around Cells 1, 2, 3 & 4 during the filling period. The litter control infrastructure was inspected on a daily basis and any defects remedied immediately. Any loose litter or other litter identified on site is removed and disposed of in an appropriate manner and all vehicles delivering waste to or removing waste from Holmestown Waste Management facility are appropriately covered.

Table 7 Environmental Nuisance Control 2016

Nuisance	Mitigation Measures in Place
Vermin	<i>Pestguard</i> . Permanent bait points set up on site (internal and external). Inspections carried out on a monthly basis. If infection found then weekly inspections until rodent free. Monthly reports produced and kept at site office.
Litter	Daily litter picking and litter inspections are carried out as CA site. Inspection log kept at site office. Litter fencing has been erected around Cells 1, 2, 3 & 4. Permanent litter fencing was erected around Phase 2
Flies	<i>Pestguard</i> employed to control flies. If flies present then treated through spraying. Reports kept in site office.
Odour	Fixed monitoring points established on site and monitored as required. Odour inspections adhere to recommendations from the Office of Environmental Enforcement's method of assessment of odours.

Condition 11.5 of the licence states that prior to the commencement of waste disposal, the licensee shall submit to the Agency for its agreement a proposal for the control and eradication of vermin and fly infestations at the facility.

A number of proposals were produced by Wexford County Council during 2008 and submitted to the Agency for approval. These proposals have since been approved and implemented on site in order to address the issue of nuisance monitoring as follows:

- Control and eradication of vermin and fly infestation proposal.
- Odour monitoring proposal

Copies of both proposals and associated correspondence with the Agency are kept on file at the site office.

8 RESOURCE & ENERGY CONSUMPTION

8.1 Electricity and Energy Usage

Electricity usage for the reporting period was estimated at 194,195 kWh. The administration building at Holmestown has been designed with energy efficiency in mind. The following is a list of energy saving mechanisms that have been implemented:

- Control of internal lighting based on occupancy and the level of available natural light.
- Hot water heated by a combination of wood chip boiler and highly efficient vacuum tube solar panels
- Under floor heating system and wood chip boiler providing all heat for administration building
- Mechanical heat recovery unit which uses exhaust warm air to heat cold air coming into the building
- Rainwater harvester in operation to collect water from building roof for reuse in toilets
- Building management system monitors the temperature in each room and controls
- Integral mini wind turbine and solar panel power each light column in operation in the car park area.
- A wind turbine was constructed on site in October 2009. This is located south east of the Administration Building and provides power to the building.

8.2 Water

No water was used on the landfill site. As there was no water meter installed in the site office to date to monitor water intake, no domestic water usage data is available. A rainwater harvester is in operation to supply water for sanitary use.

8.3 Diesel

Total diesel fuel consumption is estimated to be 500 litres from 1st January to 31st December 2016. This is related entirely to civic amenity site operations.

9 EMISSIONS & ENVIRONMENTAL MONITORING SUMMARY

9.1 Emissions and environmental monitoring

A summary of licence requirements for environmental monitoring, as carried out at Holmestown Landfill during this reporting period (January 2016 – December 2016), is presented in Table 9 below. A plan showing the location of all monitoring points is included in Appendix G.

All industries have to annually report environmental emissions and waste transfer data through a web-based form as part of their AER. The E-PRTR Regulation (EC) No 166/2006 concerning the establishment of a European Pollutant Release and Transfer Register came into force in February 2006 and was brought into Irish law through SI No 123 of 2007. The PRTR 2016 document is included in Appendix A.

Table 8 A summary of emissions & environmental monitoring as specified in W0191-2

Emissions Monitoring	Frequency
Landfill Gas Flare	Continuously/Annually
Leachate Leachate Treatment Plant	Continuously/Quarterly/Annually
Surface Water Pond	Continuously/Quarterly/Annually
Environmental Monitoring	Frequency
Landfill Gas Site Office Gas migration monitoring Boreholes Gas field Balancing	Continuously Monthly Monthly/as required
Leachate Leachate levels Visual, odour and temperature Leachate analysis	Continuous Quarterly Annual
Surface water	Quarterly / Annual
Groundwater Levels	Monthly
Groundwater	Quarterly / Annual
Noise	Quarterly
Dust	Tri-Annually and Annually
Odour	Daily/Weekly/As required

9.2 Monitoring

Wexford County Council carries out a comprehensive monitoring programme, in compliance with the waste licence conditions. The monitoring programme includes Landfill Gas, Leachate Level & Quality, Surface Water Quality, Groundwater Level & Quality, Noise, Dust, Odour, Meteorological and Topographical surveys.

Results are interpreted using either pre-defined emission limits or in the case of more variable systems such as water bodies by comparison with pre-operational (baseline) trends. Licence Monitoring at HWMF follows the principles set out in the following:

- 1999/31/EC. *Council Directive on the Landfill of Waste*. Official Journal of European Communities.
- Campbell, R. et al. (2003), *Landfill Manuals: Landfill Monitoring, 2nd Edition*. EPA.

There are emission limits in the license for gas, noise and dust parameters. Trigger Levels (based on monitoring data) have also been set for emissions from the storm water attenuation pond and selected groundwater parameters. Control Rule principles as referred to in the Landfill Directive have been established for groundwater monitoring and will be revised as more data is collected. In accordance with the Licence/best practice we measure a number of additional parameters to supplement emission limit/trigger level data. All the data measured is reviewed and utilised for interpretation where applicable.

Monitoring during this reporting period was carried out according to Schedule D of Waste Licence W191-02. Monitoring for 2016 is summarised in this section.

9.3 Emissions Monitoring:

9.3.1 Landfill Gas Flare

One enclosed type flare (in accordance with Section 3.14.1 of the licence) is in operation at HWMF. The flare was commissioned originally in 2009 (at 500m³/hr capacity) and downsized in August July 2016. The flare is located at the eastern side of the facility adjacent to the Leachate Treatment Plant. The flare is connected to the active cells via a 355mm OD PE pipe that runs both over and underground. The flare's current maximum operating capacity is 150m³/hr and it is set to burn at >1000 degrees C. The retention time for the flare is 0.5 sec.

The main components of the flare include:

- Control valves;
- Knock out Pot with filter;
- Flame arresters;
- Gas booster (variable speed motor)
- Sampling equipment for both influent bulk gases and emissions;
- Temperature control by thermocouple and louvers;
- Human Machine Interface;
- Call out System.
- Connection to SCADA

Emission limit values for landfill gas plant are set out in Schedule C.6 of our License and are summarized in the Table 10 below.

Table 9 Flare Emission Limits

Parameter	Flare Enclosed Emission Limit Value ^{Note 1}	Utilisation Plant Emission Limit Value ^{Note 1}
Nitrogen oxides (NO _x)	150mg/m ³	500mg/m ³
CO	50mg/m ³	50mg/m ³
Particulates	n/a	130mg/m ³
Total Organic carbon (TOC)	10mg/m ³	10mg/m ³

Note1: Dry gas referenced to 5% oxygen by volume for utilisation plants and 3% oxygen by volume for flares.

The operation of the flare unit is continuously monitored and recorded by the SCADA system. A call out system is linked to the SCADA which notifies WCC staff via text message if the preset control limits are breached. The SCADA is linked to the Administration Building and the internet. Flare performance is monitored by staff on an ongoing basis.

Flare emission results

A flare emission test was carried out in accordance with specified requirements on the flare unit in December 2016 by Glenside Environmental Services. The report concluded that NO_x in the landfill flare exhaust stack was within the emission limit values specified in Schedule C6 of Waste Licence W0191-02, however a TOC level exceedence (12.11mg/m³) was recorded. The full report will be submitted to the EPA as part of the Annual Results Report under separate cover.

9.3.2 Leachate Treatment Plant

Emission limit values for leachate discharged to sewer are set out in Schedule C.7 of our License and are summarized in the Table 11 below.

Table 10 Emission Limits for Leachate Being Discharged to Sewer

Emission Point Reference: LTP3

Volume to be emitted: Maximum in one day 80m³

Parameter	Emission Limit Value
	Daily Mean Concentration (mg/l)
BOD	200
COD	750
Ammoniacal Nitrogen (NH ₄ +N)	10
Nitrate Nitrogen	1500
Alkalinity	1000
Dissolved Methane	0.2

Monitoring frequency and analysis techniques for emissions to sewer are set out in Table D.8.1 of the licence.

Leachate treatment plant results

The on site Leachate Treatment Plant was commissioned in 2009. All pre treated leachate (in accordance with section 5.12.4 of the Licence) was pumped off-site for final treatment at Wexford Wastewater Treatment Plant. It is noted that the Leachate Treatment Plant was fully compliant with the emission limits throughout 2016.

It should be noted that, occasionally, during periods of persistent heavy rainfall, it is necessary to tanker untreated leachate off site to Wexford WWTP for treatment. As this leachate is not being discharged to sewer, this leachate has not been assessed for compliance with the licence limits, although by its nature, this tends to be relatively weak leachate due to dilution.

9.3.3 Surface Water Pond

Two sampling points SWP1 and SWP2 are located on the inlet and outlet of the attenuation pond respectfully. Schedule C4 of the Licence sets discharge limits for the level of suspended solids from the outlet (SWP2) of the attenuation pond. The discharge limit is detailed in Table 12 below.

Table 11 Surface Water Discharge Limit.

Measured at the outlet of the surface water pond (SWP2).

Level (Suspended Solids mg/l)
25

In accordance with sections 3.22.1(c) and 6.5.3 of the Licence monitoring of surface water entering and discharging from the attenuation pond is ongoing. Proposals have been submitted to the Agency detailing criteria/trigger levels that determine when the outlet from the pond shall be closed. The pond outlet will close automatically if the trigger levels at the inlet (SWP1) are breached. The parameters monitored include conductivity, pH and TOC. Trigger levels have been set and are summarised in Table 13 below.

Table 12 Trigger Levels for the Attenuation Pond.

Monitoring Point	pH		Electrical Conductivity	TOC
	Upper	Lower		
	pH		uS/cm	mg/l
SWP1	9.5	6.5	875	25

The trigger level review recommends that TOC trigger levels are set at 25mg/l. For full details of attenuation pond trigger levels see report as follows:

- Fehily Timoney and Company (September 2010). Trigger Levels for Surface Water Retention Pond.

In addition Section 3.22.1 of the Licence requires levels in the surface water retention pond, flows to perimeter streams and quality of the surface water at the inlet to the surface water lagoons and being discharged to the perimeter streams to be recorded on telemetry. Similar to the pond inlet (and in addition to quarterly environmental monitoring) pH, electrical conductivity and TOC are being recorded continuously at the outlet (SWP2). A SCADA monitoring / control system is operational and can be accessed in the Administration Building on site. Discharges from the pond to the surface water stream were manually controlled, grab samples, SCADA data and visual inspection are used to ascertain optimum release conditions.

In 2016 flows to the pond were limited to:

- main access road drainage from the entrance gate to the head of the western track;
- Water pumped from waste free cells in Phase 2
- Clean run-off from the civic amenity and maintenance areas

All dirty run-off (including dirty run off from the civic amenity site and waste acceptance/quarantine areas) is directed to the LTP for pre-treatment in accordance with the Licence and then pumped off-site for final treatment at Wexford Waste Water Treatment Plant.

Surface water pond emission results

Surface water results for the watercourses in and around the site were generally satisfactory. No exceedences were recorded at the inlet or outlet of the pond.

9.4 Environmental Monitoring

9.4.1 Landfill Gas

Gas sampling was carried out on site prior to construction. Initially groundwater wells were sampled until gas wells were installed around the proposed landfill footprint. Pre-construction results showed elevated levels of carbon dioxide at a number of locations. One elevated methane reading was recorded. The majority of the pre-construction gas wells were in filled during the construction phase. Peripheral landfill monitoring boreholes GS11-GS17 (as detailed in Schedule D, Table D1.1, of our Licence) were installed in conjunction with Phase 1 of the landfill cells. Prior to landfilling high naturally occurring Methane and Carbon Dioxide levels were measured in these boreholes and an investigation was carried out at the request of the Agency. The high readings are all concentrated in the north east corner of the facility where the bulk of the excavation work was carried out. As part of the investigation nine additional boreholes (GW2-GW10) were installed. Subsequent reports noted the elevated levels of carbon dioxide and methane pre-construction and summarized that *'It is likely therefore that when fill material was placed on top of this virgin ground, it acted like a semi-impermeable blanket, inhibiting venting of gases and causing a build up of gas in the ground.'*

The reports recommended that for a two year period monitoring is carried out at all boreholes at intervals not exceeding one month. Additionally, vertical and horizontal gas extraction pipes are monitored (at weekly intervals approx.) to assess pressures within the waste body to ensure that negative pressures are maintained. For full details of the investigation into the naturally occurring gases see reports as follows:

- Fehily Timoney and Company (April 2008). Investigation of Naturally Occurring Background Gas Levels at Holmestown Landfill. Risk Assessment and Recommendations, Rev 1;

- Fehily Timoney and Company (December 2008). Investigation of Naturally Occurring Background Gas Levels at Holmestown Landfill. Trace Gas Analysis, Rev 2;

In accordance with Section 3.24.1 (b) of the Licence, landfill gas is monitored continuously in all site buildings. WCC have also installed Gas monitoring equipment in two local dwellings at the owner's request.

To allow for settlement gas sampling points within the waste will be installed when the landfill cap is completed. As noted above monitoring of the in-cell gas infrastructure is ongoing.

Landfill gas concentration limits measured in any service duct or manhole on, at or immediately adjacent to the facility and/or at any other point located outside the body of the waste are set out in Schedule C.2 of our License and are summarized in the Table 14 below.

Table 13 Landfill Gas Concentration Limits

Methane	Carbon Dioxide
20% LEL (1% v/v)	1.5% v/v

A summary of gas monitoring points is included in Table 15 below.

Table 14 Gas Environmental Monitoring Points

List of landfill gas monitoring points for 2014	
Points	Description
(GS6 to GS10 baseline pre land filling monitoring)GS11, GS12, GS13, GS14, GS15, GS16, GS17	Perimeter gas migration monitoring wells
GB1, GB2, GB3, GB4	Gas monitoring points in buildings
GW2 East west, GW3 East west, GW4 North south, GW5, GW6, GW7, GW8, GW9 East west, GW10	Gas investigation wells (Installed March/April 2008)
Waste cells	All vertical extraction wells in Phase 1.

Landfill gas results

Methane and Carbon Dioxide levels remain elevated in a number of the perimeter monitoring wells. Elevated readings were initially recorded before landfilling operations commenced with Borehole GS13 consistently recording the highest readings with methane levels as high as 37.2% (Feb.2016). The elevated readings are concentrated along the north east periphery of the phase 1 landfill footprint where the bulk of the excavation work was carried out.

Methane and carbon dioxide results for the peripheral gas boreholes have tended to fluctuate dramatically. The results on average, however, indicate that the level and location of gas

release has not varied significantly since the pre-landfilling stage (Q1, 2008) and contamination from the landfill cell is not suspected.

Three boreholes GS17, GW5 and GW10 have not exceeded trigger levels to date. GW5 and GW10 are located in virgin ground and GS17 is the most southerly borehole on the eastern perimeter of Phase 1.

Elevated results were also recorded pre and post landfilling operations for groundwater in the north east corner.

Plots detailing trends for Methane and Carbon Dioxide (licenced emission limit parameters) for the peripheral boreholes GS11-GS17 are included in Appendix C.

Gas has not been detected in any of the site buildings.

A report to review the peripheral gas borehole results was submitted to the EPA in 2010. The review incorporates all results to the end of 2009.

9.4.2 Flare.

See section 9.3.1 for general information on the flare. Landfill gas utilisation plant/enclosed flare parameters and monitoring frequency are set out in Table D.7.1 of our License. The enclosed flare parameters, monitoring frequency and analysis method are summarized in Table 16 below.

Table 15 Flare Parameters and Monitoring Frequency

Parameter	Flare (enclosed)	Analysis
	Monitoring Frequency	Method / Technique
Inlet		
Methane (CH ₄)%v/v	Continuous	Infrared analyser
Carbon dioxide (CO ₂)%v/v	Continuous	Infrared analyser
Oxygen (O ₂)%v/v	Continuous	Electrochemical
Total Sulphur	Annually	Ion chromatography
Process Parameters		
Combustion Temperature	Continuous	Temperature Probe / Data logger

The results of parameters which are monitored continuously are transferred and stored on the SCADA system.

In addition, regular monitoring of inlet gas is carried out as part of the gas field balancing procedure. The equipment used for the detection and quantification of landfill gas is a GA2000 – ATEX Certified Gas Analyser.

The operation of the flare unit is continuously monitored and recorded by the SCADA system. A call out system is linked to the SCADA which notifies WCC staff via text message if preset control limits are breached.

Flare results

The reporting element of the SCADA system was commissioned in 2010. Daily on site inspections were also carried out. During 2015, it became apparent that due to decreasing yields of landfill gas from the waste mass, our current 500m³hr flare cannot continue to operate satisfactorily as it is oversized. An SEW was submitted to the EPA to seek approval to downsize our current flare, and approval was granted. A new 150m³ enclosed flare stack was installed in August 2016.

9.4.3 Leachate

See section 6.2.1 for general information on the Leachate Treatment Plant. Seven leachate sampling locations have been established and maintained as detailed in Schedule D, Table D1.1, of the license. Three points LTP-1, LTP-2 and LTP-3 are located within the leachate treatment compound. The remainder of the monitoring points (L1, L2, L3 & L4) are located in the corresponding waste cells. In accordance with our licence, leachate levels are continuously monitored and are recorded on the SCADA system. Leachate levels for the landfill cells are maintained at 1.0m over the top of the liner at the base of the landfill in accordance with section 5.12.2 of our licence.

Leachate parameters and monitoring frequency are set out in Tables D.5.1 of the License. Continuous and quarterly monitored leachate parameters, monitoring frequency and analysis method are summarized in Table 17 below.

Table 16 Leachate Parameters and Monitoring Frequency

Parameter	Flare (enclosed)	Analysis
	Monitoring Frequency	Method / Technique
On-site Leachate		
Visual	Quarterly	Visual
Odour	Quarterly	Olfactory
Leachate Level	Continuous	Pressure transducer
Temperature.	Quarterly	Thermometer

Visual, odour and temperature inspections are carried out by site staff. Visual and odour assessment are based on visual and olfactory scales respectively. In cell leachate level is controlled and monitored by a combination of pumps, pressure probes and the SCADA system.

Leachate results

No significant visual, odour or temperature change was noted in 2016. Leachate levels in the landfill cells is maintained at <1.0m above the liner at the base of the landfill.

Annual leachate quality was sampled in Dec. 2016 in accordance with Table D5.1 of the Licence. The annual leachate quality report is submitted under separate cover in accordance with schedule F of the licence.

9.4.4 Surface Water

Eleven surface water sampling locations have been established and maintained as detailed in Schedule 4, Table D1.1, of the license. Two points SW4 and SW5 are located downstream of Phase 1 of the landfill. Nine are located on watercourses upstream: SW1; SW2, SW2A; SW3; SW3A; SW6; SW7; SW8; SW9 of current operations. There are two principal surface water streams one flowing from SW9 to SW5 and another from SW2 to SW5. Each is made up from a number of smaller streams and drainage ditches. These combine to the north east of the site and flow east, north east towards the river Slaney. Monitoring point SW5 is located downstream of the main junction of these streams. The northern edge of the landfill is 1.8km approx. from the River Slaney. The first surface water samples were collected in 2002. Pre-construction and pre-landfilling results are utilised as baseline data for comparison as required.

The objective of environmental monitoring is to screen for environmental pollution due to facility operations. Surface water bodies within and downstream of the facility are at risk. The relevant monitoring points are SW4 & SW5 (both downstream of the main operational areas), SWP1 & SWP2 (the attenuation pond monitoring points) and to a lesser extent SW1, SW2, SW2A, SW3, SW3A, and SW6 which are also on the Holmestown site but are upstream of all major activities. The other monitoring locations (SW7, SW8 & SW9) are upstream and offsite and their results are only interpreted if an influence in onsite streams is suspected. Surface water monitoring locations are summarized in Table 18 below.

Table 17 Surface Water monitoring locations

Surface water monitoring locations	
Surface water monitoring point	SW1, SW2, SW2a, SW3, SW4, SW5, SW6, SW7, SW8, SW9

The parameters tested in this report (in accordance with Table D.5.1 of the license) are as follows: Ammoniacal Nitrogen; Electrical Conductivity; Chloride; Dissolved Oxygen; Temperature; Ph; BOD; COD; Total Suspended Solids (TSS); Visual Inspection/Odour (weekly).

Surface water results

A visual inspection of each of the surface water monitoring locations was carried out on a weekly basis during 2016 as per licence requirements. The visual inspection and surface water quality results for 2016 did not indicate pollution from facility activities.

An Elevated ammonia level was recorded in Quarter 1 at SW8. Similar results have been recorded at this location in the past. The elevated readings do not appear to be linked to HWMF activities as the monitoring point is located upstream of the landfill.

9.4.5 Surface water Biological Survey

A biological survey of the surface water streams surrounding Holmestown Waste Management Facility was carried out in July 2016. A total of 4 locations were selected for monitoring as follows:

- KS01 Upstream SE of facility within the site boundary – Un-named stream
- KS02 Downstream NE of the facility within the site boundary – Un-named stream
- KS03 Downstream of the facility within the site boundary – Polehore stream
- KS04 Upstream of the facility within the site boundary – Polehore stream

The overall quality of the un-named stream upstream of the facility was determined to be unpolluted and rated as Q3-4 at KS01, the overall quality of the un-named stream downstream of the facility was determined to be unpolluted and rated as Q3-4 at KS02 using the EPA Q-value rating system. The overall quality of the Polehore stream upstream and downstream of the facility was determined to be unpolluted and rated as Q4-5 using the EPA Q-value rating system. There were no signs of animal access to the streams at any of the monitoring locations. There was no noticeable difference in water quality between upstream and downstream locations. It is therefore concluded that the Holmestown Waste Management Facility is currently not causing any deterioration in the biological quality of surface waters. All surface water biological monitoring locations are shown in Appendix G. A copy of the biological monitoring report is kept on file at the site office and can be viewed upon request.

9.4.6 Surface water pond quality: SWP1 – SWP2

For general details on the pond see section 9.3.3 above. SWP1 and SWP2 are also monitored as part of the quarterly monitoring suite (see section 9.3.3 above).. Surface water results for the watercourses in and around the site were satisfactory.

9.4.7 Groundwater

Groundwater monitoring was carried out at a total of 7 on-site and 11 off-site private well locations on a quarterly basis as detailed in Schedule D of the waste licence. Appendix G shows the location of all groundwater monitoring locations on site. Groundwater monitoring locations are summarized in Table 19 below.

Table 18 Groundwater Monitoring Locations

Groundwater Monitoring Locations	
Existing Groundwater Monitoring Wells	BH1, BH2, BH3, BH6, BH7, BH8, BH9.
Private well monitoring points	PW1, PW2, PW2A, PW2B, PW5, PW7, PW8, PW9, PW10, PW11, PW11A.

In accordance with section 6.4.2 of the Licence a report was previously submitted to the Agency detailing proposals for trigger levels for Groundwater results. Three parameters were selected based on suitability: Ammoniacal Nitrogen; Conductivity and Chloride. The trigger levels are summarised in Table 20 below.

Table 19 Trigger Levels for Groundwater.

Trigger level			
Units	Ammoniacal nitrogen mg/l	Electrical Conductivity μ S/cm	Chloride Mg/l
BH 1	0.2	1,890	126
BH 2 ^{Note 1}	66.0	2,633	163
BH 3	0.2	613	59
BH 6	0.1	917	211
BH 7 ^{Note 2}	Note 2	Note 2	Note 2
BH 8	1.6	835	59
BH 9 ^{Note 1}	1.3	1,629	46

Note 1 = Down gradient groundwater borehole
 Note 2 = BH7 has been dry during post waste monitoring

The trigger level report (in accordance with the Landfill Directive) proposes Control Rule principles for groundwater management at HWMF. The Control Rule principal involves the establishment of Control Levels and Trigger Levels. A Control Level is set as an indicator of possible environmental pollution. A Trigger Level is defined as the level at which significant adverse environmental effects have occurred. Control Levels are used to instigate review/remediation works prior to significant environmental pollution taking place. For full details on the Control Levels and the Trigger Levels for groundwater see report as follows:

- Fehily Timoney and Company (September 2010). Groundwater Monitoring Trigger Levels.

Groundwater results

Elevated levels were recorded in a number of the on-site groundwater boreholes tested. The elevated levels date back to pre-landfilling and have been recorded both upstream and downstream of the landfill footprint. Similar to gas readings the elevated results are prevalent downstream in the north east corner where the bulk of the on site excavation works were carried out and appear to be due to a non-landfill source in the soil. Elevated ammonia and chloride levels were recorded in 2016, based on borehole locations and trends the elevated ammonia and chloride do not appear to be related to HWMF activities. The main soil mass is low permeability clay with sand and gravel lenses. Groundwater movement in the soil zone is relatively slow resulting in low flows. This enables emissions to build up locally around a source as appears to be indicated from the results.

Monitoring of groundwater levels was carried out at each of the on-site locations on a quarterly basis with the use of a dip meter. Groundwater levels remained relatively consistent throughout the monitoring period, with only minor variations in groundwater levels recorded in accordance with prevailing weather conditions.

Monitoring results were not available for BH8 and BH9 during 2016 as the wells were found to be dry at time of sampling.

Historical trend graphs of groundwater trigger levels (ammoniacal nitrogen, conductivity and chloride) are included in Appendix C

A total of eleven private wells are monitored around the facility. A review of private well results is considered outside the scope of standard reporting. The results will be utilised for more rigorous reviews if required. See quarterly reports for results.

9.4.8 Noise

Ten potentially noise sensitive locations are sampled at HWMF on a quarterly basis in accordance with Table D.1.1 of the Licence and amendments thereof. Emission limit values for noise are set out in Schedule C.1 of our License and are summarized in the Table 21 below.

Table 20 Noise Emission Limits

Day Db(A) $L_{Aeq}(30^1$ minutes)	Night Db(A) $L_{Aeq}(30^1$ minutes)
55	45

1. Duration amended to 30mins in accordance with Table D.4.1 of the licence and current standard practice.

Noise monitoring frequency and technique are summarized Table 22 below.

Table 21 Noise Monitoring: Frequency and Technique

Parameter	Monitoring Frequency	Analysis Method/Technique
L(A)E _Q [30 minutes]	Quarterly	Standard ^{Note1}
L(A) ₁₀ [30 minutes]	Quarterly	Standard ^{Note1}
L(A) ₉₀ [30 minutes]	Quarterly	Standard ^{Note1}
Frequency Analysis (U3 Octave band analysis)	Quarterly	Standard ^{Note1}

Note 1: "International Standards Organisation. ISO 1996. Acoustics- description and Measurement of Environmental noise. Parts 1, 2 and 3."

Leq(t): is the continuous equivalent sound level over a specified time (t), where t represents a 30-minute period during this survey. This measure is used to give an indication of the average noise level over the specified time period.

L10 and L90: are both statistical noise levels. L10 Indicates that for 10% of the monitoring period, the sound levels were greater than the quoted value. L90 Indicates that for 90% of the monitoring period, the sound levels were greater than the quoted value. L10 is used to express event noise. L90 is used to express background noise, usually filtering out loud, intermittent interferences such as traffic noise.

Noise results

A number of elevated noise monitoring results were noted for both day and night monitoring in 2016. The elevated noise levels have been attributed to external factors (e.g. N25, vehicles passing, dogs barking, birdsong etc.) for the majority of the results recorded. No significant tonal noises were recorded. Historical trend graphs of noise results are included in Appendix C.

9.4.9 Dust

Jim McGarry carried out dust monitoring at ten representative locations using Bergerhoff dust gauges on three separate occasions during 2016. Sampling results are provided in Appendix C. The location of all dust monitoring locations can be found in Appendix G.

- The dust deposition limit of 350 mg/m²/day was not exceeded during 2016

9.4.10 PM₁₀ Monitoring

PM₁₀ monitoring was not carried out in 2016

9.4.11 Odour

Odour monitoring was carried out at Holmestown waste facility during 2016 as per EPA Guidance. Five odour monitoring points previously agreed with the Agency were monitored and labelled OD1, OD2, OD3, OD4 and OD5. OD1 is located to the northeast of the landfill on a bordering farm property. OD2 is located on the landfill between the active tipping area and Holmestown Little Farm on the western boundary of the site. OD3 is located between the landfill and Bolgerstown Farm on the eastern boundary of the site OD4 is upwind of the landfill and OD5 is downwind of the landfill. Odour monitoring is based on a combination of odour persistence which is rated on a scale of 0 to 2 (0 = none, 1 = intermittent, 2 = persistent), and odour intensity which is rated on a scale of 0 to 4 (0 = none, 1 = faint, 2 = moderate, 3 = strong, 4 = very strong).

No odour persistence or intensity was recorded above 0 at anytime during 2016. No odour complaints were received during 2016. On a daily basis site personnel carry out a brief walkover of the site, to assess potential odour issues. If any odours are identified during the walkover measures are implemented to reduce or remove the source of the odour as soon as possible. Quarterly odour monitoring is carried out at the five agreed points copies of all odour logs are kept on file at the site office and can be viewed upon request. Odour monitoring results for the reporting period are included in Appendix C.

9.4.12 Bioaerosols

Bioaerosols monitoring was not carried out on site at Holmestown during 2016. As per licence conditions bioaerosols monitoring is only required to be carried out upon commencement of composting operations on site. To date no composting of materials has taken place at Holmestown Waste Management facility.

9.4.1 Meteorological monitoring

All monitoring information was obtained from the weather station located at Johnstown Castle in Wexford; this station is within 10km of Holmestown Landfill site. A copy of the reports are available for review at the facility office. Meteorological graphs showing trends over time are available for review in Appendix D.

9.4.2 Topographical Survey

The latest topographical survey of the landfill cells was carried out in September 2016 and is included in Appendix G.

By comparison to the last survey carried out in March 2014, settlement appears to be in the region of 240mm (max level 25.9 in 2014, 25.659 in 2016).

APPENDICES

A. PRTR 2016



Environmental Protection Agency

[Guidance to completing the PRTR workbook](#)

PRTR Returns Workbook

Version 1.1.19

REFERENCE YEAR	2016
-----------------------	------

1. FACILITY IDENTIFICATION

Parent Company Name	Wexford County Council
Facility Name	Holmestown Waste Management Facility
PRTR Identification Number	W0191
Licence Number	W0191-02

Classes of Activity

No.	class_name
-	Refer to PRTR class activities below

Address 1	Barntown
Address 2	Wexford
Address 3	
Address 4	
	Wexford
Country	Ireland
Coordinates of Location	-6.57278 52.35079
River Basin District	IESE
NACE Code	3821
Main Economic Activity	Treatment and disposal of non-hazardous waste
AER Returns Contact Name	Sean Meyler
AER Returns Contact Email Address	sean.meyler@wexfordcoco.ie
AER Returns Contact Position	Facility Manager
AER Returns Contact Telephone Number	053 9120922
AER Returns Contact Mobile Phone Number	087 6846089
AER Returns Contact Fax Number	
Production Volume	0.0
Production Volume Units	
Number of Installations	0
Number of Operating Hours in Year	0
Number of Employees	1
User Feedback/Comments	The Holmestown flare was downsized in July 2016 from 500m3 to 150m3 which has resulted in reduced volumes of gas being extracted, however the gas quality has risen
Web Address	

2. PRTR CLASS ACTIVITIES

Activity Number	Activity Name
5(d)	Landfills
5(c)	Installations for the disposal of non-hazardous waste
5(d)	Landfills
50.1	General

3. SOLVENTS REGULATIONS (S.I. No. 543 of 2002)

Is it applicable?	
Have you been granted an exemption ?	
If applicable which activity class applies (as per Schedule 2 of the regulations) ?	
Is the reduction scheme compliance route being used ?	

4. WASTE IMPORTED/ACCEPTED ONTO SITE

[Guidance on waste imported/accepted onto site](#)

Do you import/accept waste onto your site for on-site treatment (either recovery or disposal activities) ?	
--	--

This question is only applicable if you are an IPPC or Quarry site

4.1 RELEASES TO AIR

[Link to previous years emissions data](#)

| PRTR# : W0191 | Facility Name : Holmestown Waste Management Facility | Filename : Copy of PRTR_Kilurin_W0191_2016.xls | Return Year : 2016 |

31/03/2017 17:20

SECTION A : SECTOR SPECIFIC PRTR POLLUTANTS

RELEASERS TO AIR		Please enter all quantities in this section in KGs						
No. Annex II	POLLUTANT Name	M/C/E	METHOD Method Used		QUANTITY			
			Method Code	Designation or Description	Emission Point 1	T (Total) KG/Year	A (Accidental) KG/Year	F (Fugitive) KG/Year
01	Methane (CH4)	C	ALT		272007.2	272007.2	0.0	0.0
08	Nitrogen oxides (NOx/NO2)	M	EN 14792:2005		56.4	56.4	0.0	0.0
11	Sulphur oxides (SOx/SO2)	M	ALT		69.3	69.3	0.0	0.0

* Select a row by double-clicking on the Pollutant Name (Column B) then click the delete button

SECTION B : REMAINING PRTR POLLUTANTS

RELEASERS TO AIR		Please enter all quantities in this section in KGs						
No. Annex II	POLLUTANT Name	M/C/E	METHOD Method Used		QUANTITY			
			Method Code	Designation or Description	Emission Point 1	T (Total) KG/Year	A (Accidental) KG/Year	F (Fugitive) KG/Year
					0.0	0.0	0.0	0.0

* Select a row by double-clicking on the Pollutant Name (Column B) then click the delete button

SECTION C : REMAINING POLLUTANT EMISSIONS (As required in your Licence)

RELEASERS TO AIR		Please enter all quantities in this section in KGs						
Pollutant No.	POLLUTANT Name	M/C/E	METHOD Method Used		QUANTITY			
			Method Code	Designation or Description	Emission Point 1	T (Total) KG/Year	A (Accidental) KG/Year	F (Fugitive) KG/Year
351	Total Organic Carbon (as C)	M	ALT	IS EN 12619:2013	11.0	11.0	0.0	0.0

* Select a row by double-clicking on the Pollutant Name (Column B) then click the delete button

Additional Data Requested from Landfill operators

For the purposes of the National Inventory on Greenhouse Gases, landfill operators are requested to provide summary data on landfill gas (Methane) flared or utilised on their facilities to accompany the figures for total methane generated. Operators should only report their Net methane (CH4) emission to the environment under T(total) KG/yr for Section A: Sector specific PRTR pollutants above. Please complete the table below:

Landfill: [Holmestown Waste Management Facility](#)

Please enter summary data on the quantities of methane flared and / or utilised	T (Total) kg/Year	M/C/E	METHOD Method Used		Facility Total Capacity m3 per hour
			Method Code	Designation or Description	
Total estimated methane generation (as per site model)	392973.2	C	EST	Landgem	N/A
Methane flared	120966.0	M	OTH	Flare Scada Records	500.0 (Total Flaring Capacity)
Methane utilised in engine/s	0.0				0.0 (Total Utilising Capacity)
Net methane emission (as reported in Section A above)	272007.2	C	EST	Landgen-Scada records	N/A

4.3 RELEASES TO WASTEWATER OR SEWER

[Link to previous years emissions data](#)

| PRTR# : W0191 | Facility Name : Holmestown Waste Management Facility | Filename : Copy of PI

31/03/2017 17:20

SECTION A : PRTR POLLUTANTS

OFFSITE TRANSFER OF POLLUTANTS DESTINED FOR WASTE-WATER TREATMENT OR SEWER									
Please enter all quantities in this section in KGs									
POLLUTANT		METHOD			QUANTITY				
No. Annex II	Name	M/C/E	Method Used		Emission Point 1	T (Total) KG/Year	A (Accidental) KG/Year	F (Fugitive) KG/Year	
			Method Code	Designation or Description					
01	Methane (CH4)	M	OTH		0.266848	0.266848	0.0	0.0	
06	Ammonia (NH3)	M	OTH		41.9	41.9	0.0	0.0	

* Select a row by double-clicking on the Pollutant Name (Column B) then click the delete button

SECTION B : REMAINING POLLUTANT EMISSIONS (as required in your Licence)

OFFSITE TRANSFER OF POLLUTANTS DESTINED FOR WASTE-WATER TREATMENT OR SEWER									
Please enter all quantities in this section in KGs									
POLLUTANT		METHOD			QUANTITY				
Pollutant No.	Name	M/C/E	Method Used		Emission Point 1	T (Total) KG/Year	A (Accidental) KG/Year	F (Fugitive) KG/Year	
			Method Code	Designation or Description					
303	BOD	M	OTH		226.7	226.7	0.0	0.0	
306	COD	M	OTH		3125.6	3125.6	0.0	0.0	
327	Nitrate (as N)	M	OTH		1097.7	1097.7	0.0	0.0	

* Select a row by double-clicking on the Pollutant Name (Column B) then click the delete button

5. ONSITE TREATMENT & OFFSITE TRANSFERS OF WASTE

PRTR - W0191 | Facility Name - Holmestown Waste Management Facility | Filename - Copy of PRTR_Kilurin_W0191_2016.xls | Return Year - 2016 |

31/03/2017 17:20

Please enter all quantities on this sheet in Tonnes

Transfer Destination	European Waste Code	Hazardous	Quantity (Tonnes per Year)	Description of Waste	Waste Treatment Operation	Method Used		Location of Treatment	HAZ Waste - Name and Licence/Permit No of Next Destination Facility Non HAZ Waste - Name and Licence/Permit No of Recover/Disposer	HAZ Waste - Address of Next Destination Facility Non HAZ Waste - Address of Recover/Disposer	Name and License / Permit No. and Address of Final Recoverer / Disposer (HAZARDOUS WASTE ONLY)	Actual Address of Final Destination (i.e. Final Recovery / Disposal Site (HAZARDOUS WASTE ONLY))
						MC/E	Method Used					
Within the Country	13 02 08	Yes	7.835	other engine, gear and lubricating oils	R9	M	Weighed	Offsite in Ireland	Erva Environmental,084/1	Clonman,Portlaoise,Co.Laoise	Erva Environmental,084/1, Clonman Environmental, Co. Laoise, Ireland	Clonman,Portlaoise,Co. Laoise, Ireland
Within the Country	13 02 08	Yes	0.0	other engine, gear and lubricating oils	R9	M	Weighed	Offsite in Ireland	Greenstar,WCP/KK/054(A)10	Park,Gorey,Co.Wexford, Ireland	Greenstar,WCP/KK/054(A)10, Ireland	Greenstar,WCP/KK/054(A)10, Ireland
Within the Country	15 01 02	No	57.34	plastic packaging	R3	M	Weighed	Offsite in Ireland	Greenstar,WCP/KK/054(A)10	Park,Gorey,Co.Wexford, Ireland	Greenstar,WCP/KK/054(A)10, Ireland	Greenstar,WCP/KK/054(A)10, Ireland
Within the Country	15 01 04	No	4.78	metallic packaging	R4	M	Weighed	Offsite in Ireland	Rhab Glassco Ltd.,WP2472006	Unit 4 Osberstown Industrial Park,Caragh Road,Nass,Co.Kildare,Ireland	Unit 4 Osberstown Industrial Park,Caragh Road,Nass,Co.Kildare,Ireland	Kilrane,Rosslare,Co. Wexford, Ireland
Within the Country	15 01 05	No	26.3	composite packaging	R3	M	Weighed	Offsite in Ireland	AES/GOFF Ltd.,W00229-01	Wexford, Ireland	AES/GOFF Ltd.,W00229-01, Ireland	Wexford, Ireland
Within the Country	15 01 05	No	0.0	composite packaging	R3	M	Weighed	Offsite in Ireland	Greenstar,WCP/KK/054(A)10	Park,Gorey,Co.Wexford, Ireland	Greenstar,WCP/KK/054(A)10, Ireland	Greenstar,WCP/KK/054(A)10, Ireland
Within the Country	15 01 07	No	60.66	glass packaging	R3	M	Weighed	Offsite in Ireland	Rhab Glassco Ltd.,WP2472006	Unit 4 Osberstown Industrial Park,Caragh Road,Nass,Co.Kildare,Ireland	Unit 4 Osberstown Industrial Park,Caragh Road,Nass,Co.Kildare,Ireland	Erva Environmental,084/1, Clonman Environmental, Co. Laoise, Ireland
Within the Country	16 01 07	Yes	0.68	oil filters	R9	M	Weighed	Offsite in Ireland	Erva Environmental,084/1	Clonman,Portlaoise,Co.Laoise	Erva Environmental,084/1, Clonman Environmental, Co. Laoise, Ireland	Clonman,Portlaoise,Co. Laoise, Ireland
Within the Country	16 06 01	Yes	0.0	lead batteries	R4	M	Weighed	Offsite in Ireland	Erva Environmental,084/1	Clonman,Portlaoise,Co.Laoise	Erva Environmental,084/1, Clonman Environmental, Co. Laoise, Ireland	Clonman,Portlaoise,Co. Laoise, Ireland
Within the Country	16 06 01	Yes	3.04	lead batteries	R4	M	Weighed	Offsite in Ireland	KMK,WCP-OW-08-0607-01	Bettystown Cross,Bettystown Co.Meath, Ireland	KMK,WCP-OW-08-0607-01, Bettystown Cross,Bettystown Co. Meath, Ireland	Bettystown Cross,Bettystown Co. Meath, Ireland
Within the Country	16 06 04	No	12.86	alkaline batteries (except 16 06 03)	R4	M	Weighed	Offsite in Ireland	The Recycling Village,WFP-LH-10-0010-01	Wexford Waste Water Treatment Plant, Kilrane,Rosslare,Co. Wexford, Ireland	The Recycling Village,WFP-LH-10-0010-01, Unit 4 Tenure Business Park,Monasterboice,Drogheda Co.Louth,Ireland	Unit 4 Tenure Business Park,Monasterboice,Drogheda Co.Louth,Ireland
Within the Country	19 07 03	No	19388.0	landfill leachate other than those mentioned in 19 07 02	D9	M	Weighed	Offsite in Ireland	Wexford Waste Water Treatment Plant, Kilrane,Rosslare,Co. Wexford, Ireland	Wexford, Ireland	Wexford, Ireland	Wexford, Ireland
Within the Country	20 01 01	No	0.0	paper and cardboard	R3	M	Weighed	Offsite in Ireland	AES/GOFF Ltd.,W00229-01	Wexford, Ireland	AES/GOFF Ltd.,W00229-01, Ireland	Wexford, Ireland
Within the Country	20 01 01	No	121.41	paper and cardboard	R3	M	Weighed	Offsite in Ireland	Greenstar,WCP/KK/054(A)10	Park,Gorey,Co.Wexford, Ireland	Greenstar,WCP/KK/054(A)10, Ireland	Greenstar,WCP/KK/054(A)10, Ireland
Within the Country	20 01 01	No	24.1	paper and cardboard	R3	M	Weighed	Offsite in Ireland	Recycling 2000,WP/06/06	Park,Rosslare Road,Wexford, Ireland	Recycling 2000,WP/06/06, Ireland	Recycling 2000,WP/06/06, Ireland
Within the Country	20 01 01	No	0.0	paper and cardboard	R3	M	Weighed	Offsite in Ireland	Greenstar,WCP/KK/054(A)10	Park,Gorey,Co.Wexford, Ireland	Greenstar,WCP/KK/054(A)10, Ireland	Greenstar,WCP/KK/054(A)10, Ireland
Within the Country	20 01 11	No	19.39	textiles	R3	M	Weighed	Offsite in Ireland	Textiles Recycling Limited,WCP-DC-08-1225-01	Glen Abby Complex,Beilgard Road,Tallagh,Dublin 24,Ireland	Textiles Recycling Limited,WCP-DC-08-1225-01, Ireland	KMK,WCP-OW-08-0607-01, Bettystown Cross,Bettystown Co. Meath, Ireland
Within the Country	20 01 21	Yes	1.82	fluorescent tubes and other mercury-containing waste	R5	M	Weighed	Offsite in Ireland	KMK,WCP-OW-08-0607-01	Bettystown Cross,Bettystown Co.Meath, Ireland	KMK,WCP-OW-08-0607-01, Bettystown Cross,Bettystown Co. Meath, Ireland	Bettystown Cross,Bettystown Co. Meath, Ireland
Within the Country	20 01 25	No	0.8	edible oil and fat	R9	M	Weighed	Offsite in Ireland	Pure Oil,WCP-KK-10-557-01	Ballyweather,Bartstown,Co.Wexford, Ireland	Pure Oil,WCP-KK-10-557-01, Ireland	Pure Oil,WCP-KK-10-557-01, Ireland
Within the Country	20 01 35	Yes	194.916	discarded electrical and electronic equipment other than those mentioned in 20 01 21 and 20 01 23 containing hazardous components	R5	M	Weighed	Offsite in Ireland	The Recycling Village,WFP-LH-10-0010-01	Unit 4 Tenure Business Park,Monasterboice,Drogheda Co.Louth,Ireland	The Recycling Village,WFP-LH-10-0010-01, Unit 4 Tenure Business Park,Monasterboice,Drogheda Co.Louth,Ireland	Unit 4 Tenure Business Park,Monasterboice,Drogheda Co.Louth,Ireland
Within the Country	20 01 40	No	0.0	metals	R4	M	Weighed	Offsite in Ireland	Wexford County Council, Kilurin Landfill,The Deeps,Kilurin Landfill,Co.Wexford,Ireland	Wexford County Council, Kilurin Landfill,The Deeps,Kilurin Landfill,Co.Wexford,Ireland	Wexford County Council, Kilurin Landfill,The Deeps,Kilurin Landfill,Co.Wexford,Ireland	Wexford County Council, Kilurin Landfill,The Deeps,Kilurin Landfill,Co.Wexford,Ireland
Within the Country	20 01 40	No	111.38	metals	R4	M	Weighed	Offsite in Ireland	Greenstar,WCP/KK/054(A)10	Park,Gorey,Co.Wexford, Ireland	Greenstar,WCP/KK/054(A)10, Ireland	Greenstar,WCP/KK/054(A)10, Ireland
Within the Country	20 03 01	No	0.0	mixed municipal waste	R3	M	Weighed	Offsite in Ireland	AES/GOFF Ltd.,W00229-01	Kilrane,Rosslare,Co. Wexford, Ireland	AES/GOFF Ltd.,W00229-01, Ireland	Kilrane,Rosslare,Co. Wexford, Ireland
Within the Country	20 03 01	No	0.0	mixed municipal waste	R3	M	Weighed	Offsite in Ireland	Wexford County Council (kerb side recycling section), Yard,Ennisicorothy,Co.Wexford, Ireland	Wexford County Council (kerb side recycling section), Yard,Ennisicorothy,Co.Wexford, Ireland	Wexford County Council (kerb side recycling section), Yard,Ennisicorothy,Co.Wexford, Ireland	Wexford County Council (kerb side recycling section), Yard,Ennisicorothy,Co.Wexford, Ireland
Within the Country	20 03 01	No	1054.0	mixed municipal waste	R3	M	Weighed	Offsite in Ireland	Greenstar,WCP/KK/054(A)10	Park,Gorey,Co.Wexford, Ireland	Greenstar,WCP/KK/054(A)10, Ireland	Greenstar,WCP/KK/054(A)10, Ireland

* Select a row by double-clicking the Description of Waste then click the delete button


B. Staff Training

DESCRIPTION	Browne Joseph	Byrne Billy	Byrne Noel	Byrne Peter	Courtney Billy	Dempsey Michael	Fanning Noel	Fenton Myles	Hudson John	Kelly Eamonn	Maher John	O Gorman Pat	Ryan Eric	Walsh Nigel	Comments
ADR Training					25/07/2014										Refresher recommended every 5 years
Abrasive Wheels		22/10/2014	14/04/2016		25/07/2016		14/04/2016		14/04/2016						Refresher required every 3 years.
Age Friendly Training		22/10/2017	14/04/2016		25/11/2016				14/04/2019		2017				
Asbestos Awareness		13/03/2012	14/04/2014	14/03/2012					14/03/2014						
ATEX Safety Awareness	25/04/2016	25/04/2016	25/04/2016	25/04/2016					25/04/2016	25/04/2016					Refresher required every 2 years.
Bin Lift	06/05/2016		06/05/2016						06/05/2016	06/05/2016					Refresher recommended every 2 years Refuse trucks no longer operated by WCC
Corporate Induction Course							03/05/2016								
Certificate in Local Government Studies	01/09/2016	01/09/2016						01/10/2016							
Childcare Safeguarding Awareness		06/02/2016													
Chemical Safety (spraying)	10/09/2017	10/09/2017		Mar & May 12				Mar & May 12							
Chlorine Hazard Awareness					25/02/2009										Check Refresher
Compactors & Balers (safe use)								01/10/2008							Refresher recommended every 3 years
Computers (Introductory Level)								01/10/2011							11/10/2011
Counter-Balance Fork LIFT Training			23/10/2017		13/11/2017	19/05/2017		30/09/2017				11/02/2011	23/03/2016	16/07/2017	Refresher required every 5 years.
CSCS Tickets -360 Excavator												14/02/2016			
CSCS Tickets -Dumper (provisional)			09/10/2012						29/10/2012	26/07/2016					Valid for 2 years
CSCS Tickets -HEALTH AND SAFETY AT ROADWORKS	06/11/2017	06/11/2017	06/11/2017						23/10/2014	26/07/2014					Refresher required every 5 years.
CSCS SLG at Roadworks Info update									06/11/2017	06/11/2017					Check Refresher
Customer Care Inc Managing difficult and Aggressive Behaviour	20/04/2012	16/10/2012	13/11/2012	06/09/2012	17/05/2013				24/05/2012	17/05/2013	26/11/2012				20/04/2012
Disability Awareness Training				11/05/2007	23/04/2007		2017				2017	2017	2017		
Driver CPC (module 1)					06/05/2016										Module to be completed every 5 years.
Driver CPC (module 2)					03/02/2016										Module to be completed every 5 years.
Driver CPC (module 3)					20/03/2016										Module to be completed every 5 years.
Driver CPC (module 4)					2017										Module to be completed every 5 years.
Driver CPC (module 5)					11/02/2015										Module to be completed every 5 years.
E.C.D.L. Computer Course	19/03/2003				2019			20/05/2007							
Energy Mapping		13/10/2010													
Fas Waste Management Certificate		07/08/2007													
Fas Waste Operatives Training Course															16/07/2007
Fas Safe Pass	14/10/2014	14/10/2014	21/08/2016	04/02/2016	09/10/2014	24/10/2016			24/09/2016	19/03/2013	16/03/2016	27/07/2012	26/03/2016	08/05/2013	Refresher required every 4 years.
Safe Pass Alliance-Quarry & Mining	14/10/2016	14/10/2016	21/08/2020	05/02/2019	09/10/2019	25/08/2019			25/08/2019	19/02/2017	29/03/2020	27/07/2016	29/03/2020	08/05/2017	Check Refresher
Fire Extinguisher (certificate)	10/05/2014	12/05/2014	12/05/2014	12/05/2014	09/05/2014	10/05/2014			10/05/2017	10/05/2016	10/05/2016				Refresher recommended every 3 years
Fire Warden	12/05/2017	12/05/2017	12/05/2017	12/05/2017	12/05/2015	12/05/2017			12/12/2014	12/05/2017	12/05/2017				Check Refresher
First Aid Basic		04/04/2007	04/04/2007	04/04/2007									2017	2017	
First Aid: Cardiac First Responder															23/03/2016
First Aid: Heartsaver AED		22/01/2016	09/09/2016												Refresher required every 2 years.
First Aid: Occupational		22/01/2012	23/01/2012		12/11/2013	12/11/2013	26/01/2015		16/09/2012	09/10/2012	20/03/2013	20/03/2013	17/10/2016	28/01/2014	Refresher required every 2 years.
I Map Training		12/12/2015	08/05/2015	12/11/2015	12/11/2015	28/01/2017			12/01/2018	28/03/2015	28/03/2015		17/10/2016	28/01/2016	
Irish Coast Guard National Pollution		07/09/2016	07/09/2016												
Ladder Awareness	09/03/2016	09/03/2016	09/03/2016	09/03/2016	09/03/2016	09/03/2016			09/03/2016	09/03/2016	09/03/2016	09/03/2016	24/09/2016	09/03/2016	Refresher recommended every 3 years
Landfill Gas Management	09/03/2019	09/03/2019	09/03/2019	09/03/2019	09/03/2019	09/03/2019			09/03/2019	09/03/2019	09/03/2019		2017	09/03/2019	
Landfill Compactor (maintenance & safe use)															Refresher recommended every 3 years Landfill Temp Closed Training not required
Life Jacket (Care & Use)	11/11/2010	11/11/2010	11/11/2010	11/11/2010					11/11/2010	11/11/2010					
LITTER WARDEN TRAINING															
LITTER MANAGEMENT & ENFORCEMENT															
Leading Shovel (maintenance & safe use)	08/09/2014	08/09/2014	08/09/2014	08/09/2014					08/09/2014	08/09/2014					Refresher recommended every 3 years
Managing H&S in the Workplace	08/09/2017	08/09/2017	08/09/2017	08/09/2017		2017	2017		08/09/2017	08/09/2017	2017	2017			
Manual Handling	16/07/2017	30/07/2017	23/07/2017	30/07/2017	16/11/2016	28/07/2017			31/07/2017	23/07/2017	11/09/2017		25/11/2018	31/07/2017	Refresher recommended every 3 years
Operating Horticulture Equipment	26/09/2016	26/09/2016	26/09/2016	26/09/2016					26/09/2016	26/09/2016	26/09/2016				
OHSAS 18001 Internal Auditor Training				04/11/2013		2017	2017				2017	2017	2017		
PSDD & PSDP Training		12/03/2009													
Quad Bike Training (safe use and operation)		25/04/2016	25/04/2016	25/04/2016					25/04/2016	25/04/2016					Refresher recommended every 2 years
Refuse Trucks (Safe Use) Bankman	20/04/2012	20/04/2016	20/04/2016						20/04/2016	20/04/2016					Refresher recommended every 2 years
Safety in Excavations	04/04/2012	20/04/2012	20/04/2012						04/04/2012	04/04/2012					
Safety in Excavations		21/09/2010													
Safety Representative Training					2017										
Signaling, Lighting & Guarding at Roadworks															Refresher recommended every 5 years
Statutory Inspections (Lifting Equipment)		16/03/2013		16/03/2013									05/03/2019	16/03/2013	
Supervising Safety		07/08/2011		06/02/2012	06/10/2012				04/11/2013						
Teleopic Material Handling					04/11/2006										Refresher recommended every 5 years
VDU Workstation Assessor				17/05/2014											
Waste Facility Operative Training															16/07/2007

Training completed (date)
 No record of training
 Training proposed this year
 Training required



DESCRIPTION	Hobbs Fran	Meyler Sean	Comments
Cryptosporidium: Risk Assessment			
Abrasive Wheels			Refresher required every 3 years.
Asbestos Awareness			
ATEX: Safety Awareness	25/04/2014 *	25/04/2014	Refresher required every 2 years.
	25/04/2016	25/04/2016	
Certificate in Local Government Studies		01/06/2015	
CSCS Tickets -HEALTH AND SAFETY AT ROADWORKS)	06/12/2012		Refresher required every 5 years.
	06/12/2017		
Customer Care inc Managing difficult and Aggressive Behaviour	30/05/2012		
Data Protection Awareness Training		05/05/2015	
Disability Awareness			
EPA: Biodegradable Municipal Waste			
EPA: Odour Assessment			
FAS: Waste Management	18/01/2005	16/12/2014	
FAS: Safe Pass	18/06/2015	17/09/2014	Refresher required every 4 years.
	18/06/2019	17/09/2018	
Filters Eval., Op & Main.			
Fire Extinguisher	12/05/2014	12/05/2014	Refresher recommended every 3 years.
	12/05/2017	12/05/2017	
Fire Safety Manager	08/04/2009		
Fire Warden	06/12/2012		
First Aid Basic			
First Aid: Cardiac First Responder			
First Aid: Heartsaver AED	22/01/2010		
First Aid: Occupational	26/03/2015	09/06/2015	Refresher required every 2 years.
	06/03/2017	09/06/2017	
GPS Training	16/06/2006		
Health & Safety Management System Awareness			
IMAP Training		28/03/2013	
IEI Construction Contacts Bill		10/09/2013	
Landfill Gas Management			
Life Jacket: Care and Use.	11/11/2010		
Manual Handling	22/04/2015	16/07/2014	Refresher recommended every 3 years.
	22/04/2018	16/07/2017	
Procurement Training		15/03/2016	
PSDS & PSCS	11/03/2009		
Safety in Excavations			
Statutory Inspections (Lifting Equipment)			
Supervising Safety		04/11/2013	
Water: Validation and Interpretation			

Key




C. Monitoring Results and Graphs



Gas Monitoring Results 2016

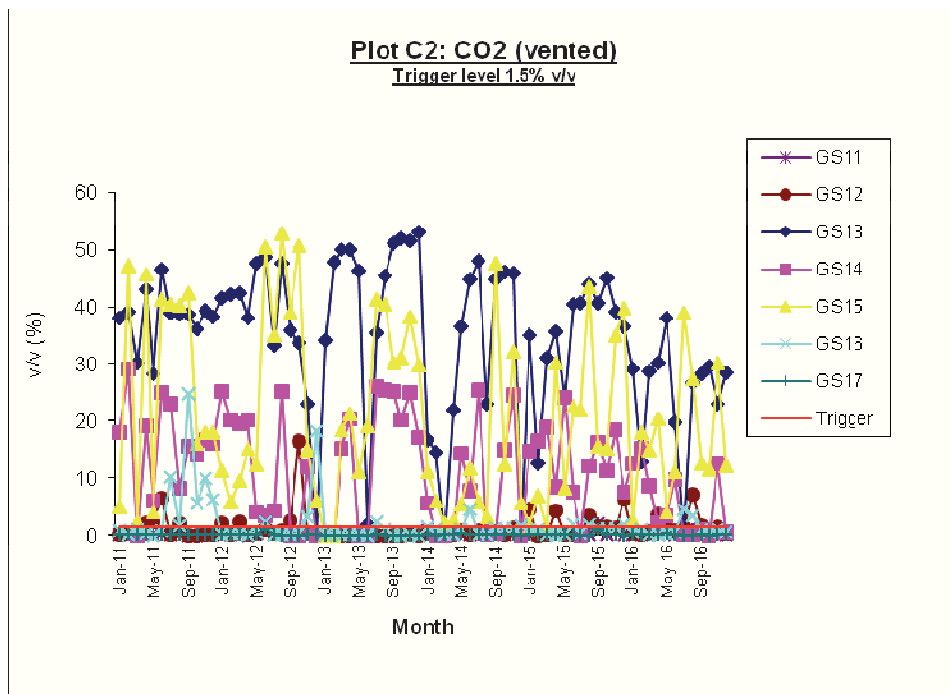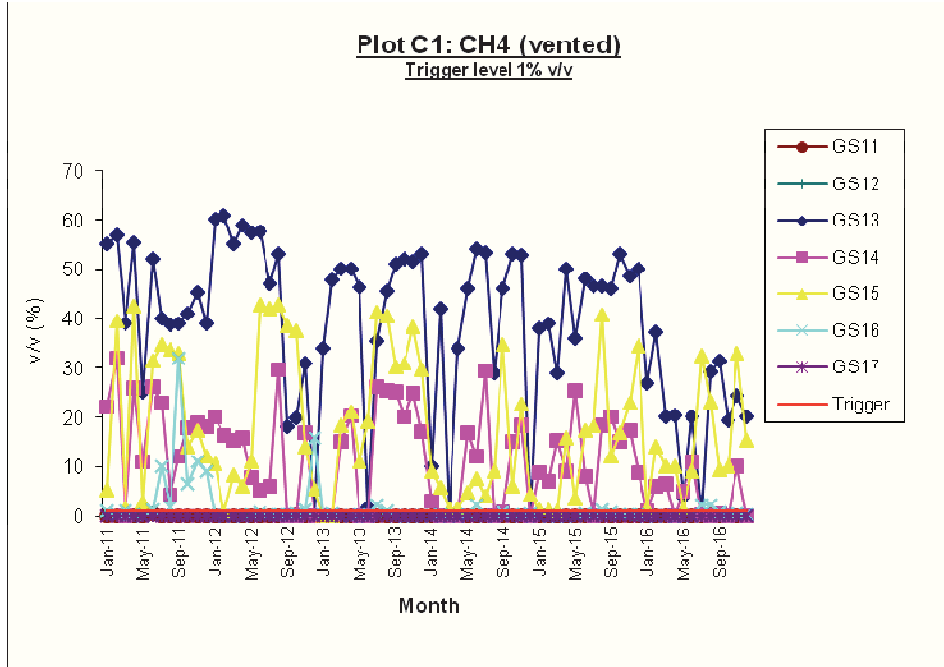



Surface Water Monitoring Results 2016

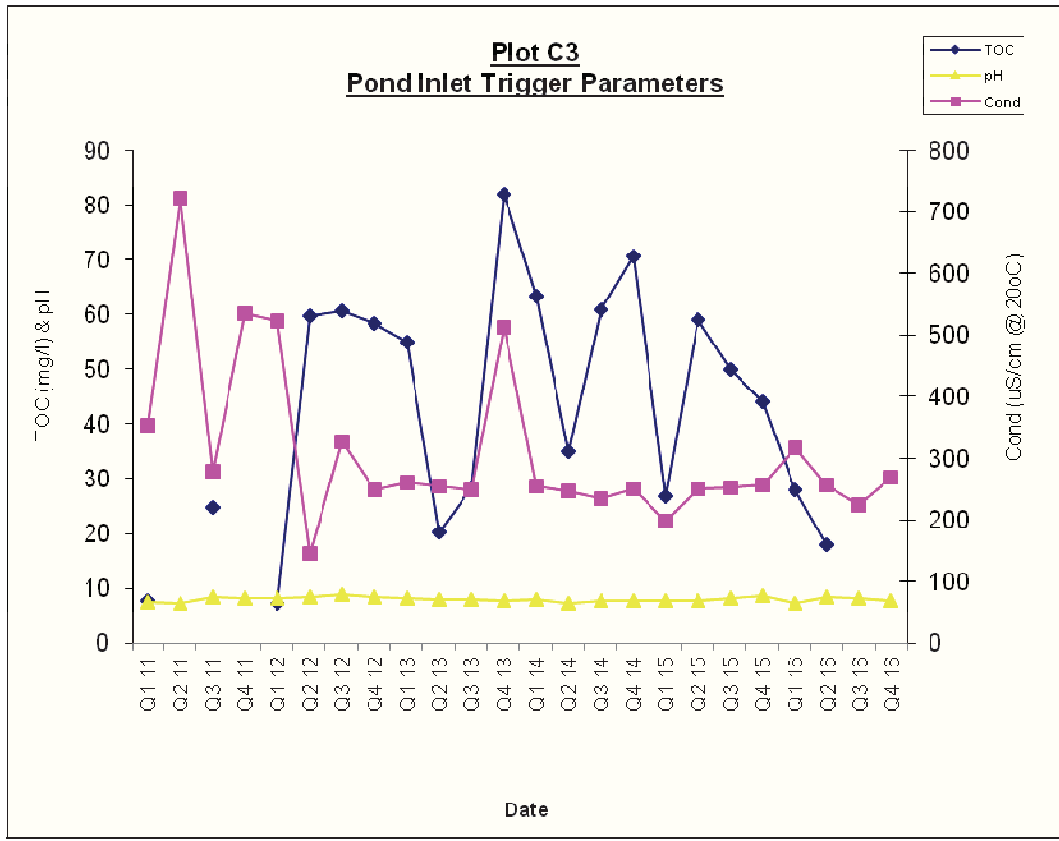



Ground Water Monitoring Results 2016

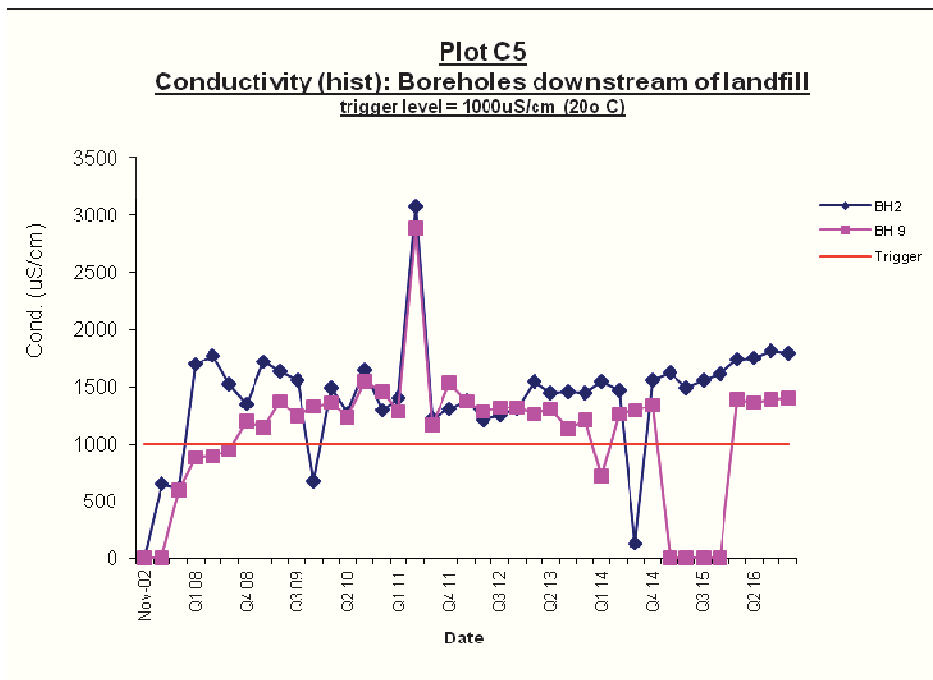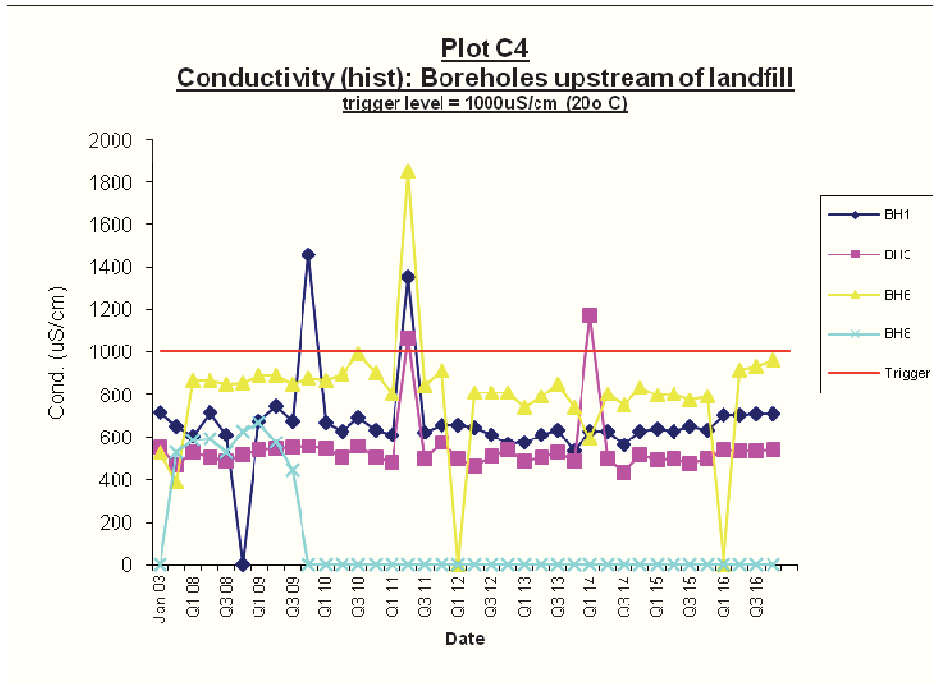



Ground Water Monitoring Results 2016

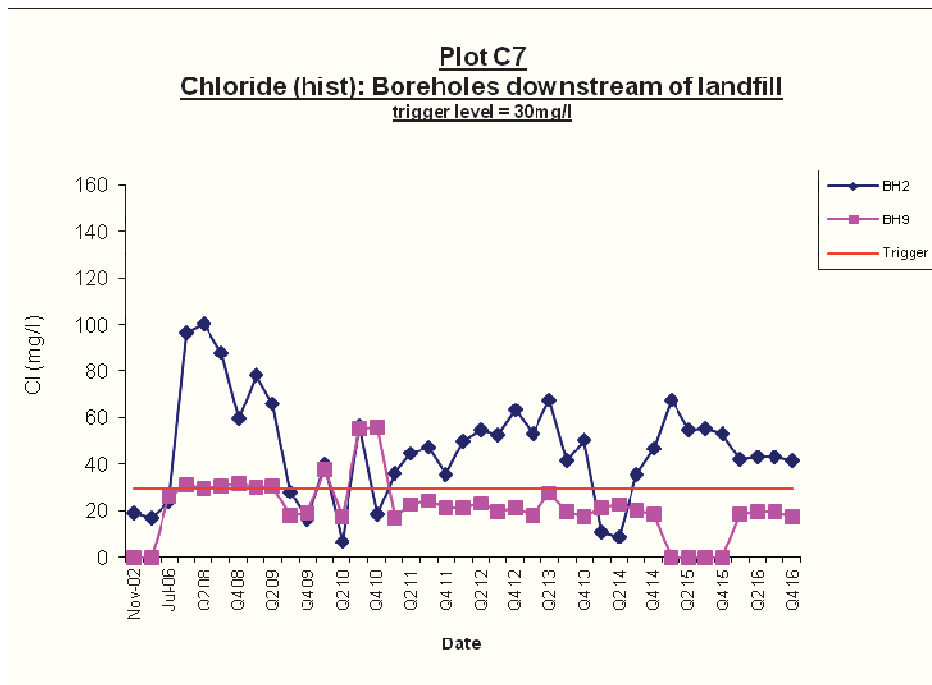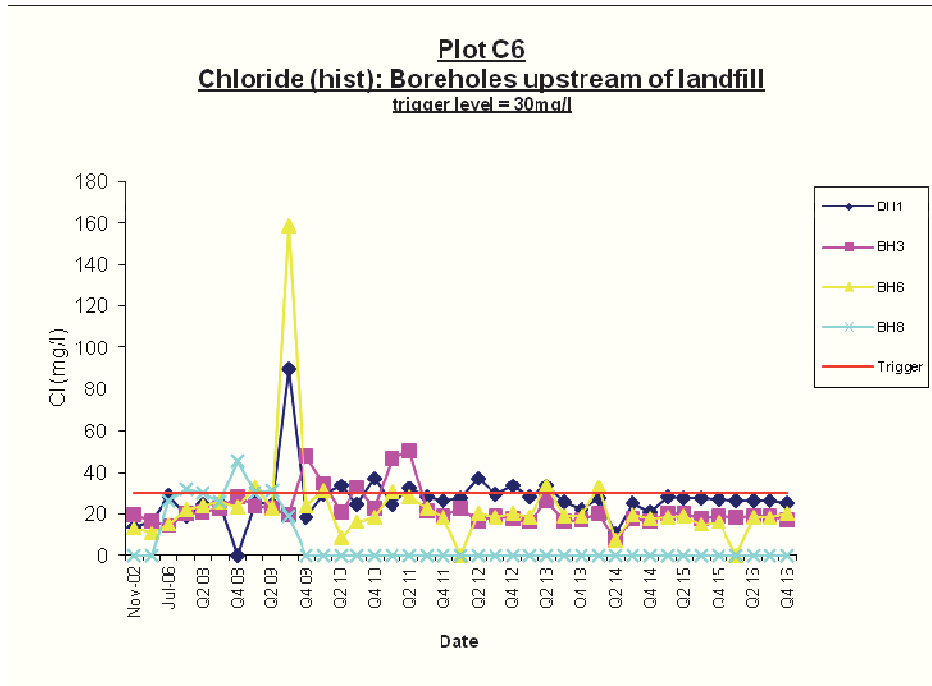

Ground Water Monitoring Results 2016

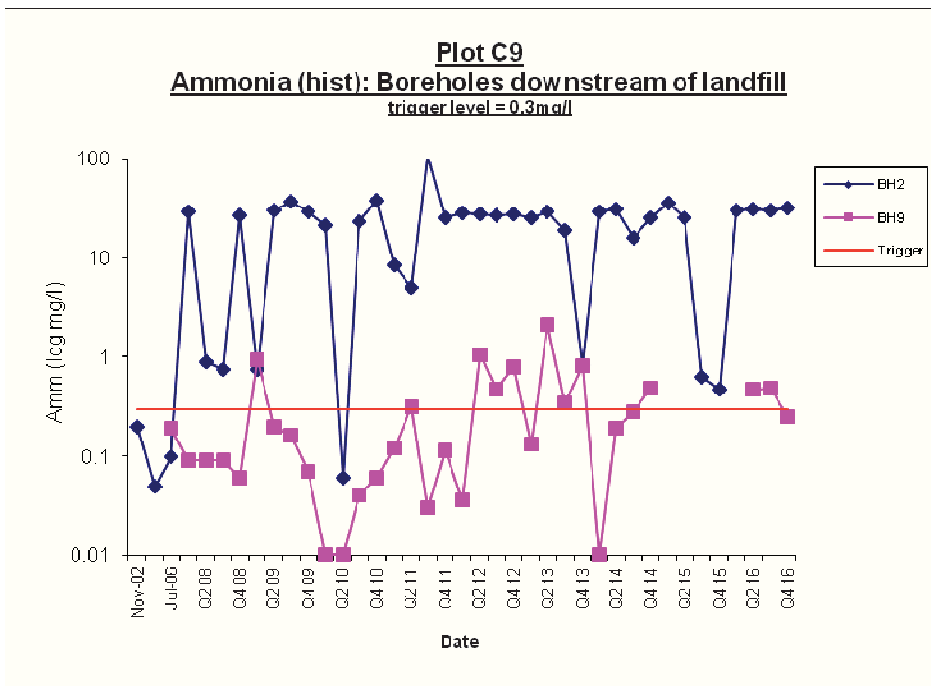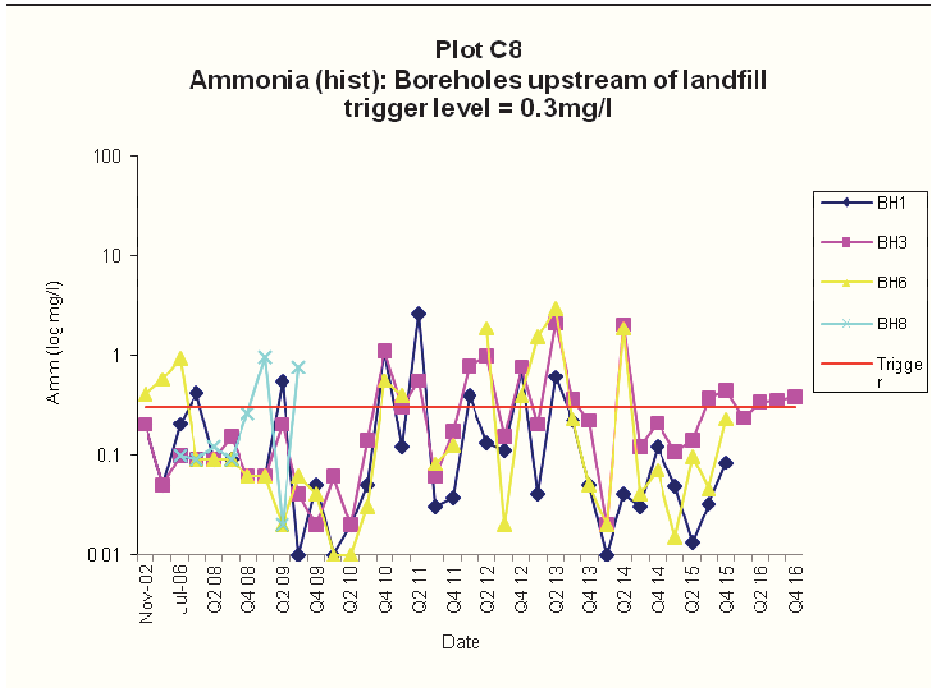


Noise Monitoring Results 2016

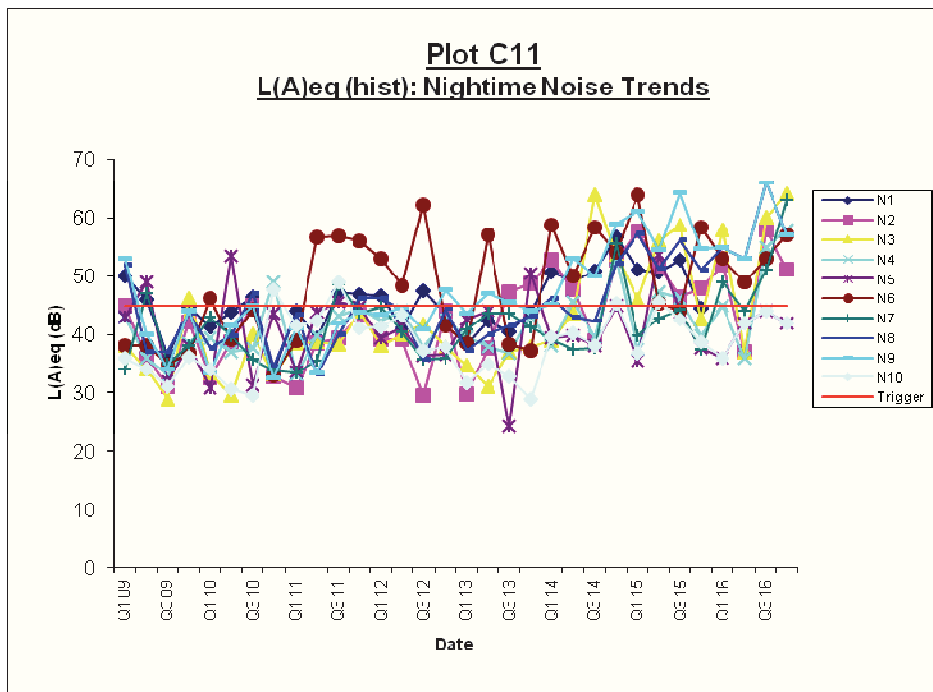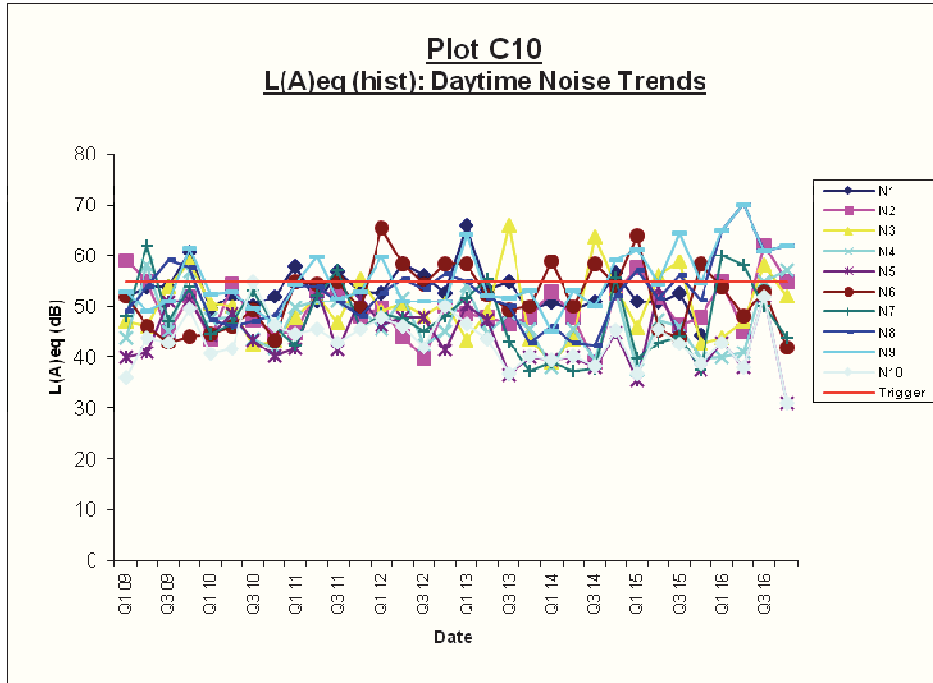

Dust Monitoring Results 2016

Dust Monitoring Locations and Frequency			
Dust analysis	D1 - D10	D1 - D10	D1 - D10
Dust Monitoring Results (mg/m ² /day)			
Date Range	Mar-Apr 16	May-Jun 16	Sep - Oct 16
D1	70	203	188
D2	55	91	162
D3	7	94	123
D4	40	79	78
D5	113	107	99
D6	30	85	83
D7	94	jar broken	69
D8	41	13	253
D9	87	67	99
D10	55	59	101

Odour Monitoring Results 2013 - 2016


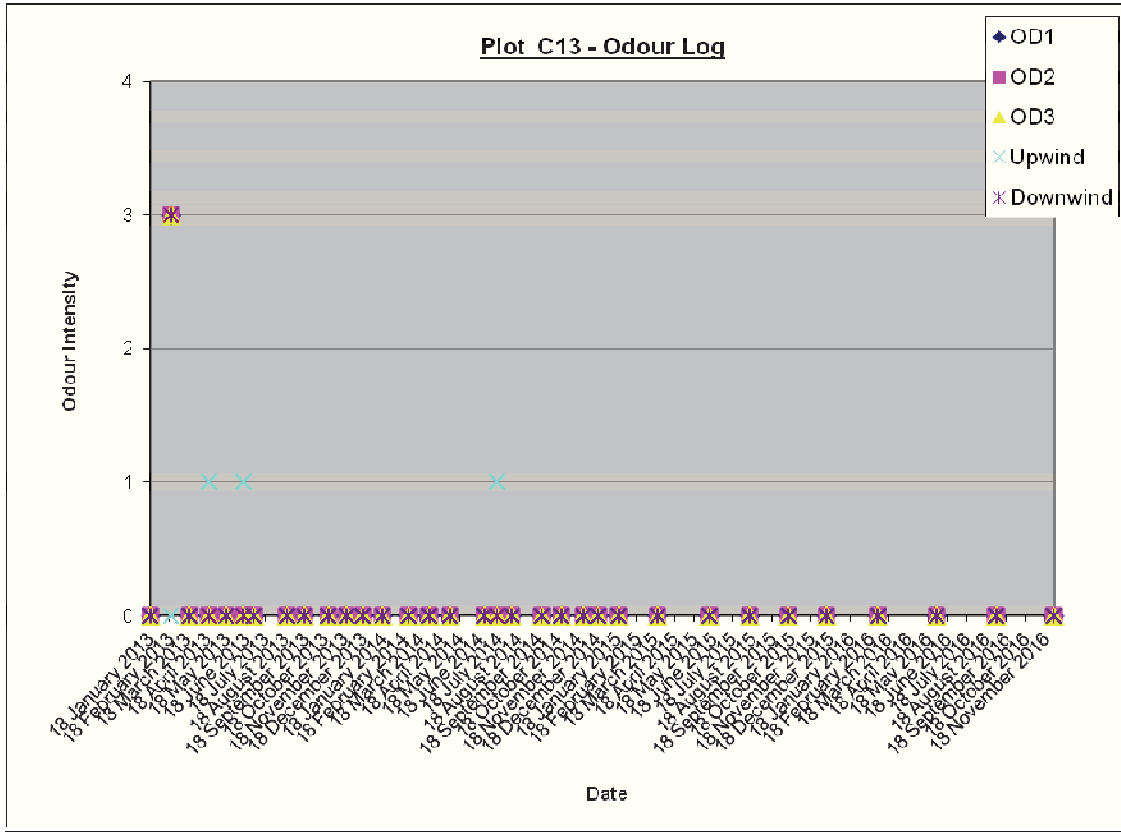


Legend



0	No detectable odour
1	Faint odour
2	Moderate odour
3	Strong odour
4	Very strong odour

D. Meteorological Data Graphs


Appendix D – Meteorological Graphs

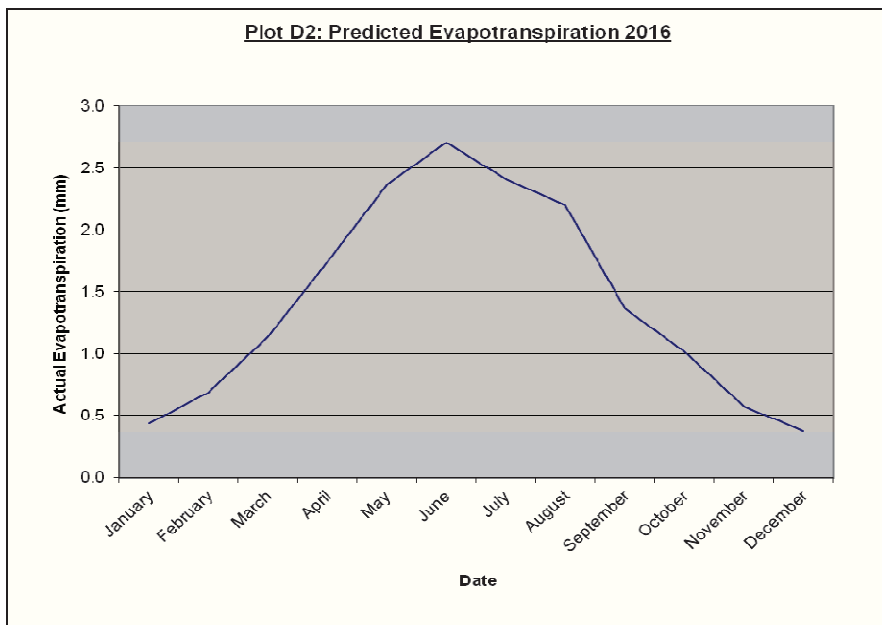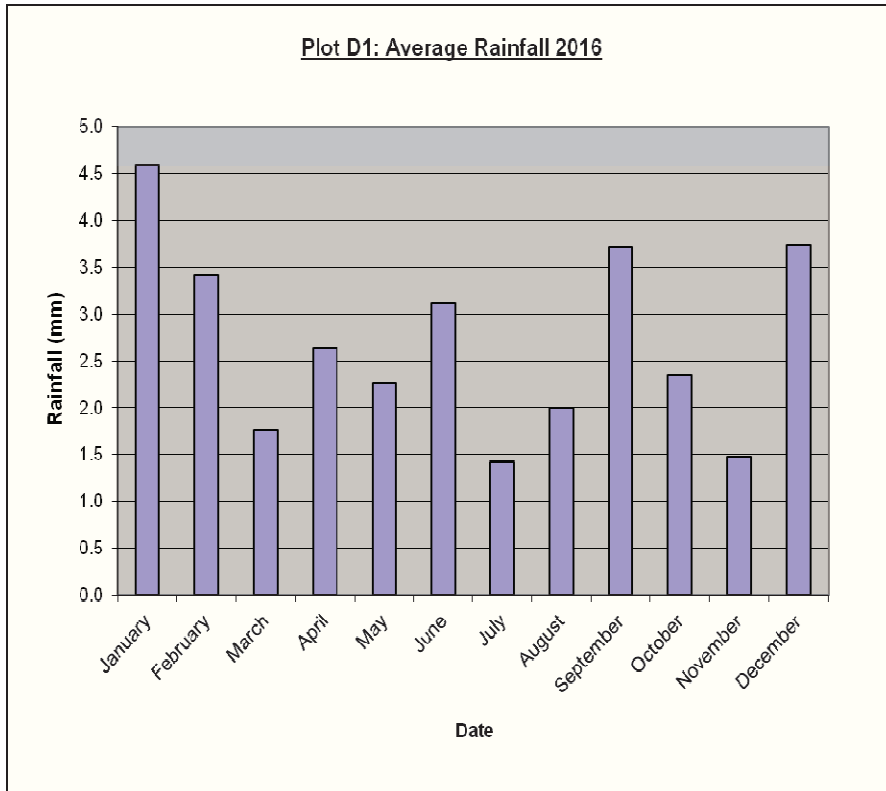

Appendix D – Meteorological Graphs

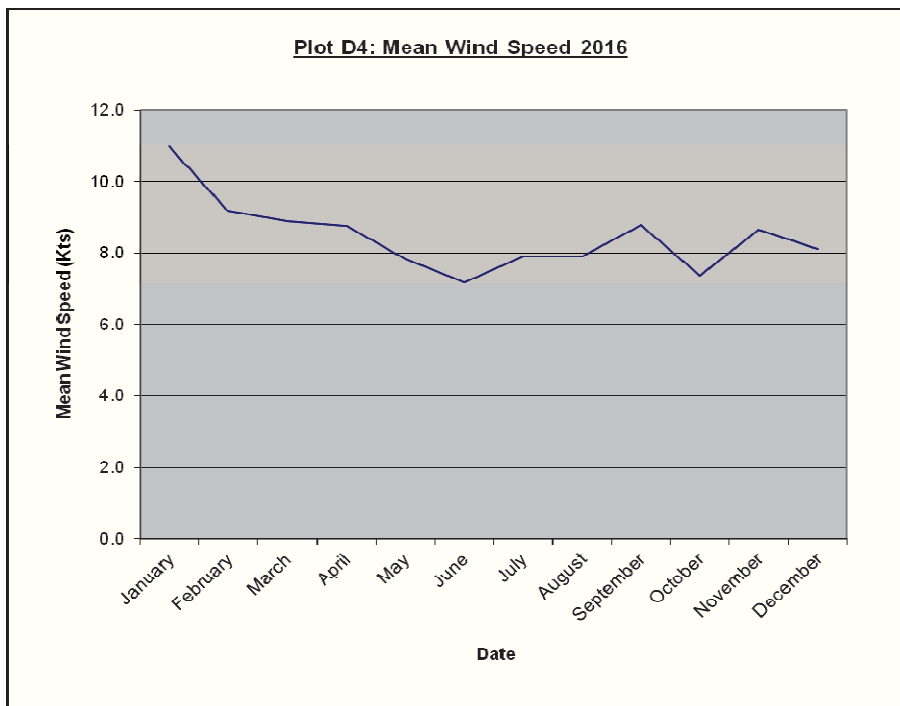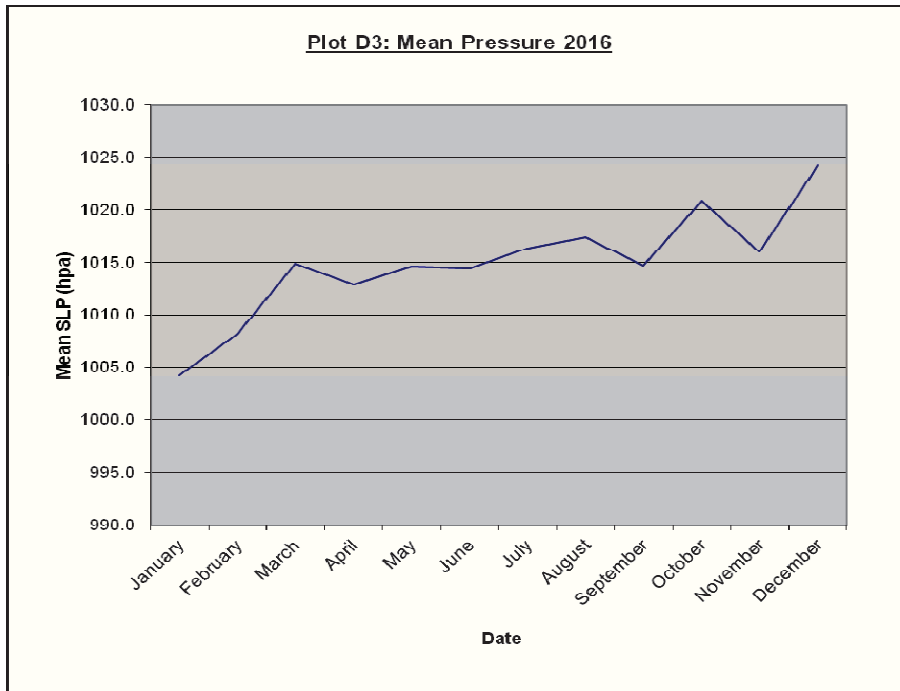

Appendix D – Meteorological Graphs

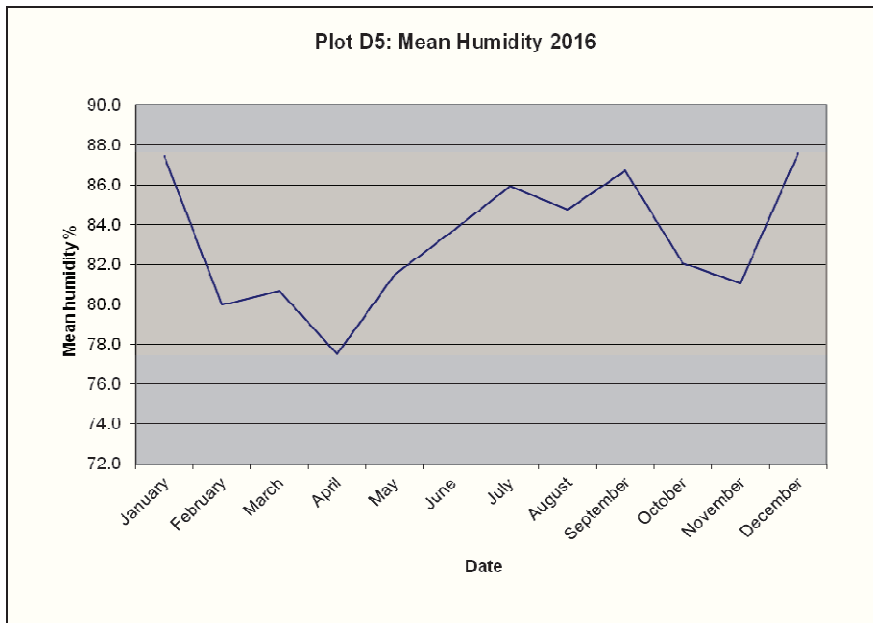

E. Summary of waste accepted and consigned off-site

Waste consigned off-site from Holmestown Civic Amenity from 1st January 2016 to 31st December 2016 (tonnes)

Recycling/Recovery Wastes													
Waste Type	Jan	Feb	Mar	Apr	May	June	July	Aug	Sept	Oct	Nov	Dec	TOTALS
Cardboard	7.68	7.8	3.64	4.72	9.42	3.4	4.44	6.16	8.94	6.16	3.58	7.12	73.06
W.E.E. & Mobiles	11.32	17.689	21.681	14.738	16.96	16.76	20.705	20.469	21.13	15.704	3.2	14.56	194.916
Plastic	5.4	5.9	4.92	5.58	8.4	3.5	3.74	5.24	4.8	3.94	2.02	3.9	57.34
Newspaper	0	3.6	2.4	2	2.26	2.6	1.94	1.76	2.02	2.4	1.36	1.76	24.1
Scrap metal	10.58	3.2	15.5	14.14	14.54	15.14	10.06	4.96	4.38	12.76	0	6.12	111.38
Oil Filters	0	0.2	0	0	0	0	0.12	0	0	0.36	0	0	0.68
Textile	1.39	1.1	1.1	1.08	1.42	1.4	0.74	0.240	0	1.1	9.2	0.62	19.39
Glass	9.01	5.63	3.97	6.28	3.1	6.39	5.98	4.16	5.37	3.9	0	6.87	60.66
Tetra Pak	0	0	1.56	0	0	0.142	0	0	0	0	0	2.32	4.022
Engine Oil	0.88	0	3.7	0	0	0.065	0	1.14	0	1.1	0	0.95	7.835
Magazines	5.9	6.08	8.408	4.48	9.42	4.347	0	0	0	5.7	0	0	44.335
Aluminium drink cans	0.14	0.3	0.14	0.32	0.16	0.46	0.12	0.320	0.28	1.2	1.1	0.24	4.78
Books	0.3	0.3	0	0	0	0	0	0	0	0	0	0	0.6
Cooking Oil	0.8	0	0	0	0	0	0	0	0	0	0	0	0.8
Lead acid batteries	0.52	0.6	0.5	0	0	0	0	1.42	0	0	0	0	3.04
Household batteries	0	0	0	0	0	0	0	0	12.86	0	0	0	12.86
Farm fence batteries	0	0	0	0	0	0	0	0	0	0	0	0	0
Printer Cartridges	0	0	0	0	0	0	0	1.568	0	0	0	0	1.568
Food waste	1.06	1.7	2.04	1.48	1.54	1.6	1.3	0	2.8	4.1	7.2	1.48	26.3
Tubes & Bulbs	0	0	0	1.06	0	0.76	0	0	0	0	0	0	1.82
Recycling/recovery Total	54.98	54.099	69.559	55.878	67.22	56.564	49.145	47.437	62.58	58.424	27.66	45.94	649.486

General Waste													
	Jan	Feb	Mar	Apr	May	June	July	Aug	Sept	Oct	Nov	Dec	TOTALS
BLACK BAG	22.4	22.6	29.66	17.16	15.7	20.6	18.46	14.44	21.16		13.84	23.88	219.9
TIMBER	8.46	7.06	2.78	15.7	16.26	13.88	12.66	12.24	4.54	14	5.54	14.52	127.64
BULKY	57.94	64.22	53.28	71.08	86.32	80.14	58.16	38.3	46.18	59.64	24.9	66.04	706.2
General Waste Total	88.8	93.88	85.72	103.94	118.28	114.62	89.28	64.98	71.88	73.64	44.28	104.44	1053.74

F. Water Balance Calculation Spreadsheet

TABLE 1
Leachate Generation

Actual rainfall 2016	994.5	mm/yr	actual data from met eireann (1st Jan to 31st dec)
Infiltration Factor	89%		
Infiltration to landfill	885.105	mm/yr (temporary restored areas)	
Dirty paved areas	994.5	mm/yr (assumes all rainfall becomes leachate)	
Density	0.90	t/m3	
Waste input 2016	0.00	t	
Liquid waste input	0	m3/yr	
Absorptive Capacity	0.025	m3 per m3	
Site life	20	years	

Year	Months	Phase	Active Area			Temp Cap	Full Cap	Waste Input 2015	Active Infiltration (m³)	Temp Infiltr. m3	Restored Area Infiltration (m²)	Total Water (m³)	Cumulative Water (m³)	Absorptive Capacity (m³)	Cumulative abs. capacity (m³)	Cumulative leachate generation (m³)	leachate produced (Lo) (m³)
			Active Area	Temp Cap	Full Cap												
2016 (1st Jan to 31st Dec)	12	Dirty paved areas	740	0	0	0	0	736	0	0	0	736	0	0	736	736	
2016 (1st Jan to 31st Dec)	12	1 (Cell 1, 2, 3, 4, 1b)	0	18700	0	0	0	0	16,551	0	0	17,287	0	0	17,287	17,287	
Total 2016																17,287	

Total 2016 17,287

Measured Quantity N/A

Less Admin Bldg WW 120

Nett WB Quantity N/A


Variance N/A

LTP Total 2016	m³
HWMF Generated leachate	17,287
HWMF Wastewater	120
HWMF carryover from 2015	1000
Imported from Killurinn	980
Total	19,387

Dirty paved areas draining to LTP	Area (m2)
Weighbridges	100
Waste Inspection/Quarantine	250
Wheelwash	90
LTP Yard	300
Total	740

Wastewater from Admin Building	
Ave Nr of Staff	8
Per capita daily flowrate (from EPA manual)	60 l
Total Daily flowrate	480 l
Nr working days	250 d
total Annual Flow	120000 l
	120 m3

G. Drawings

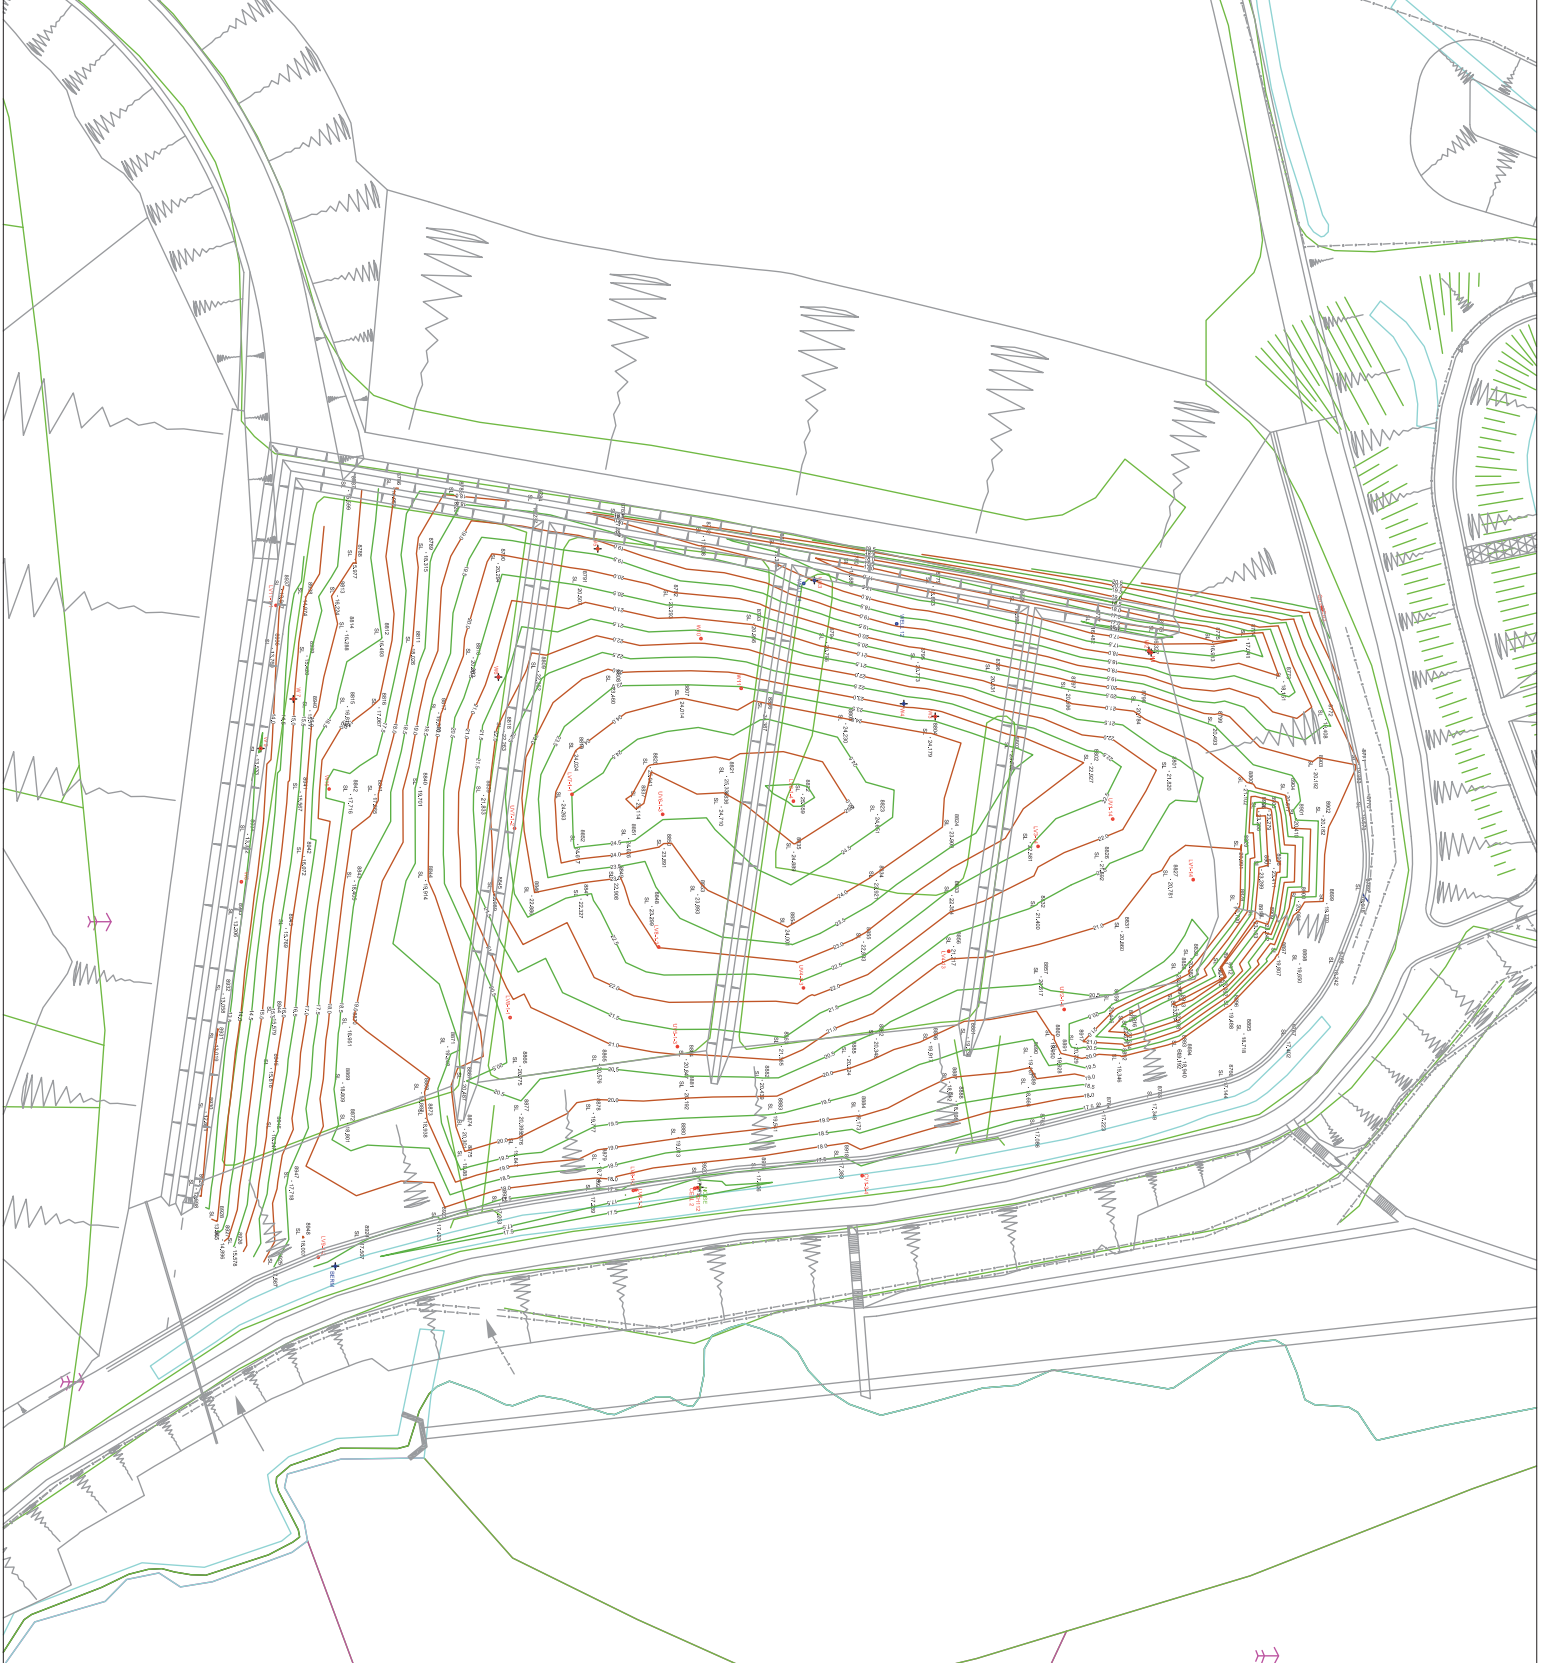


Capital Surveys
 Land Surveyors & Civil Engineers

Bickleton, Tisbury, Co. Wick
 Phone: (053) 34218 or (057) 685764


email: info@capital.ie
 website: www.capital.ie


Project: Topographical Survey
Client: Wickford County Council
 Henslow Farm,
 Henslow

Dwg Title: Site Plan Cell Survey

Scale: N15
Date: 04/16
Job no: 14-71
Dwg no: 14-71L
Dr by: J.K.
Rev: A

Rev.	Date	Description	By
A.			

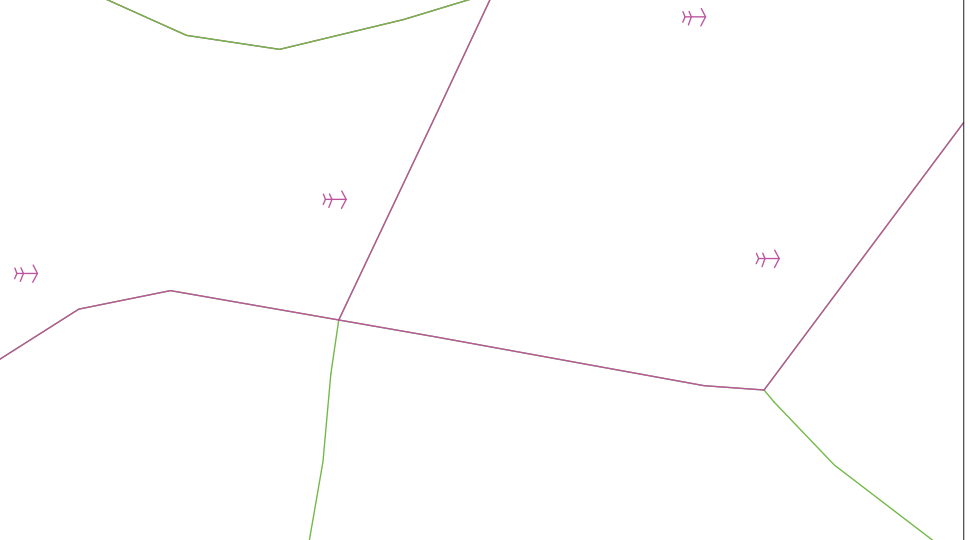

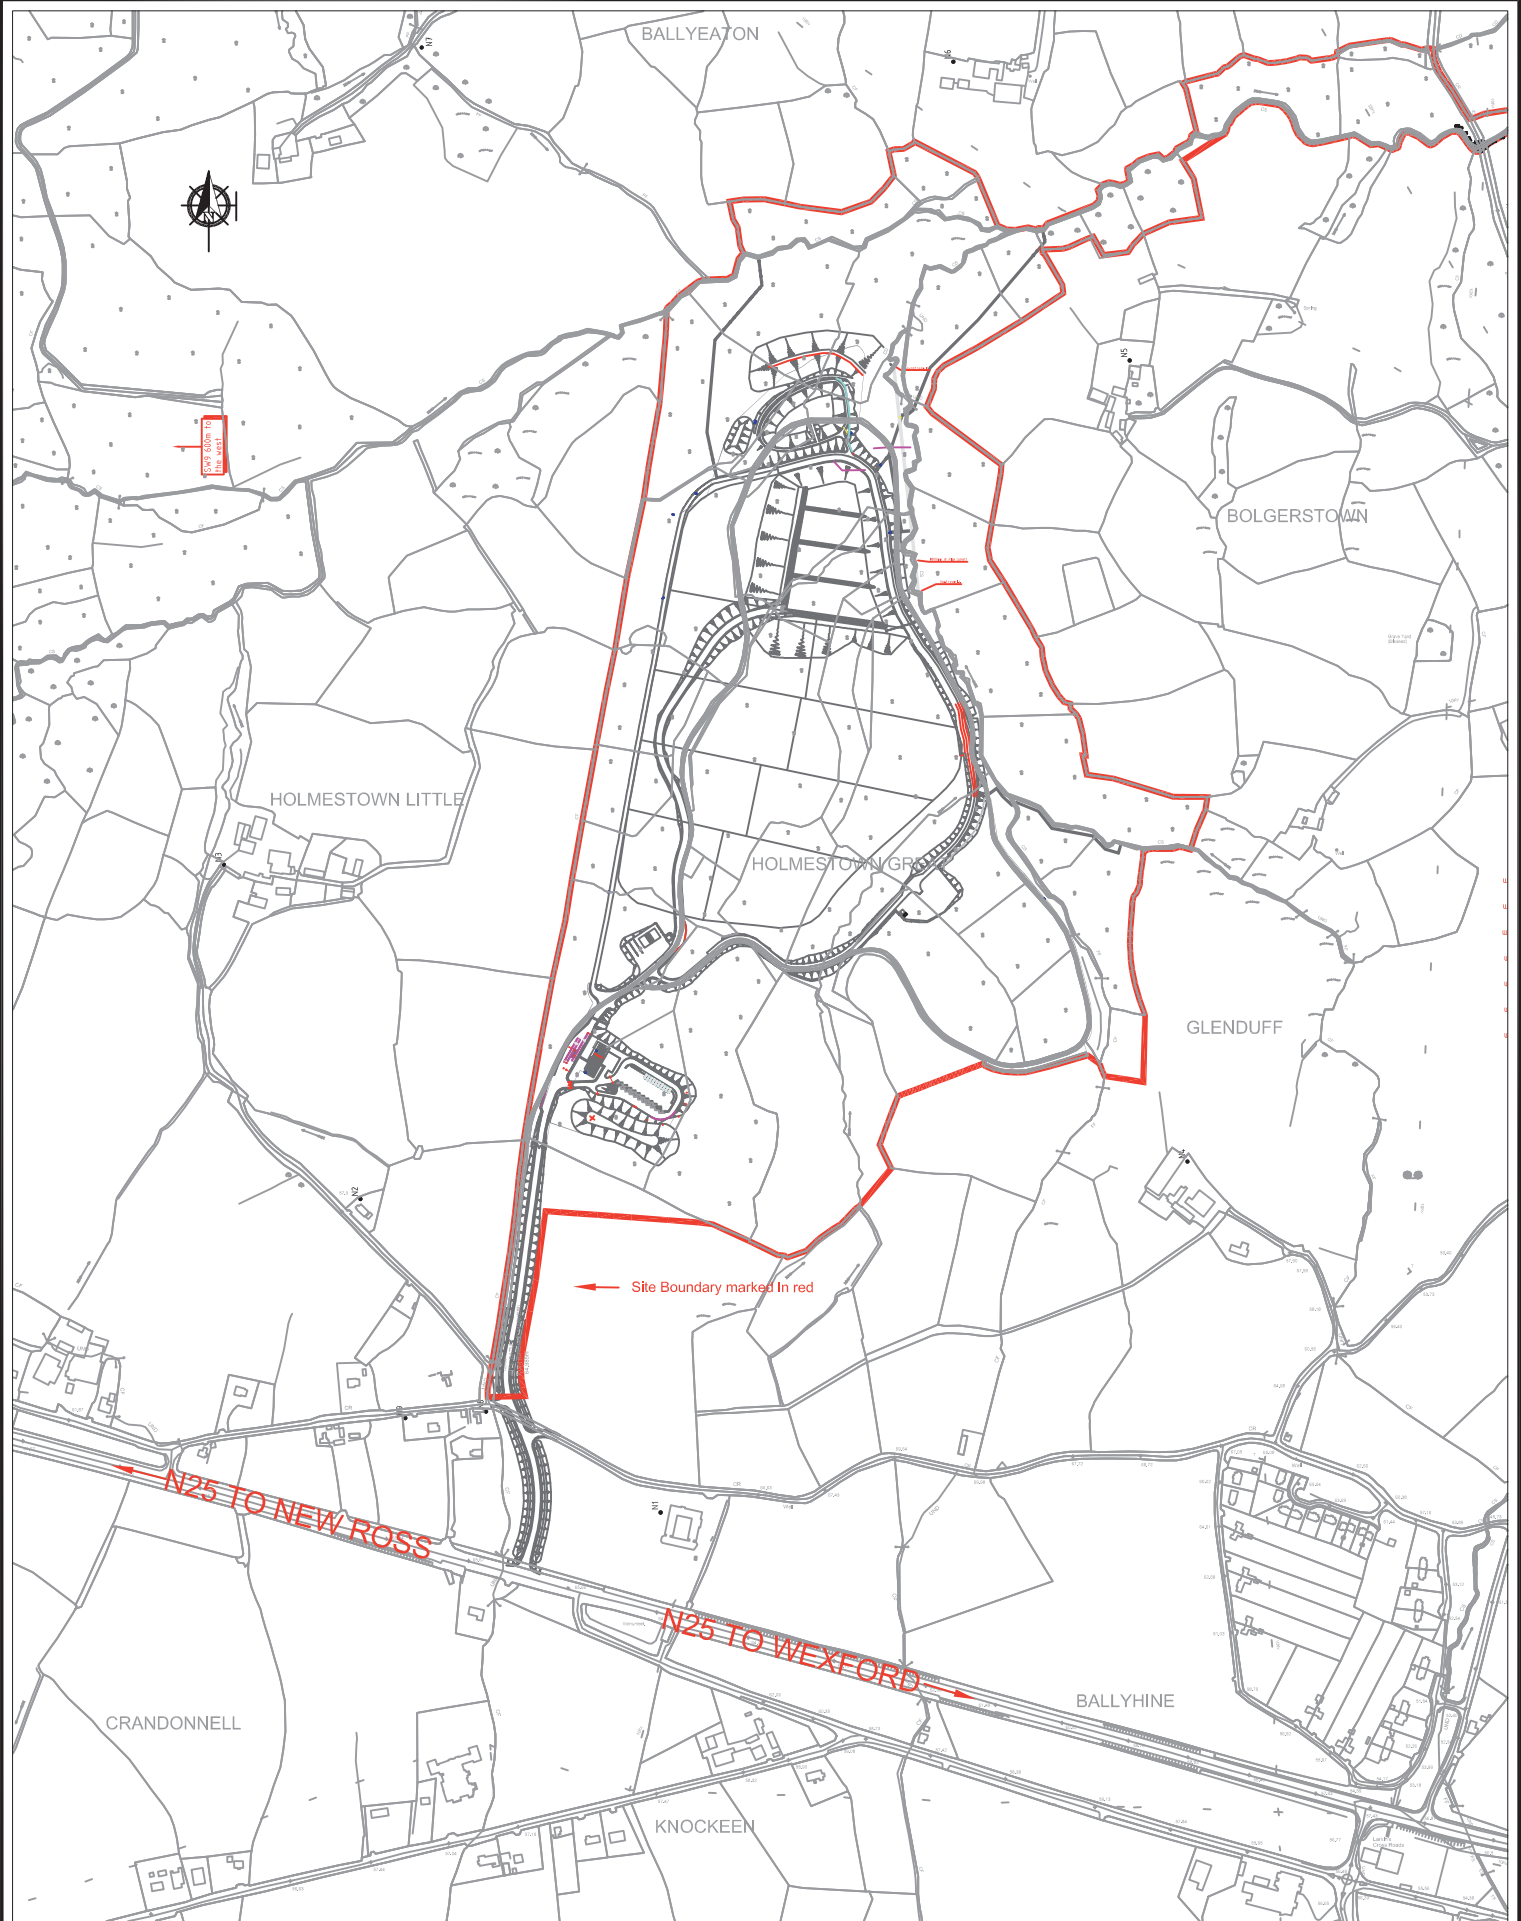

Wexford
County
Council




**Holmestown Waste
Management Facility**
Wexford County Council,
Wexford
Tel: 053-9120922

PROJECT TITLE:
**Holmestown Waste Management
Facility**

DRAWING TITLE:
**Appendix G1
Site Location Plan**

DRAWN:
CHECKED:
DATE:
SCALE:
DRAWING No:

DRAWING IS INDICATIVE ONLY. DO NOT SCALE.

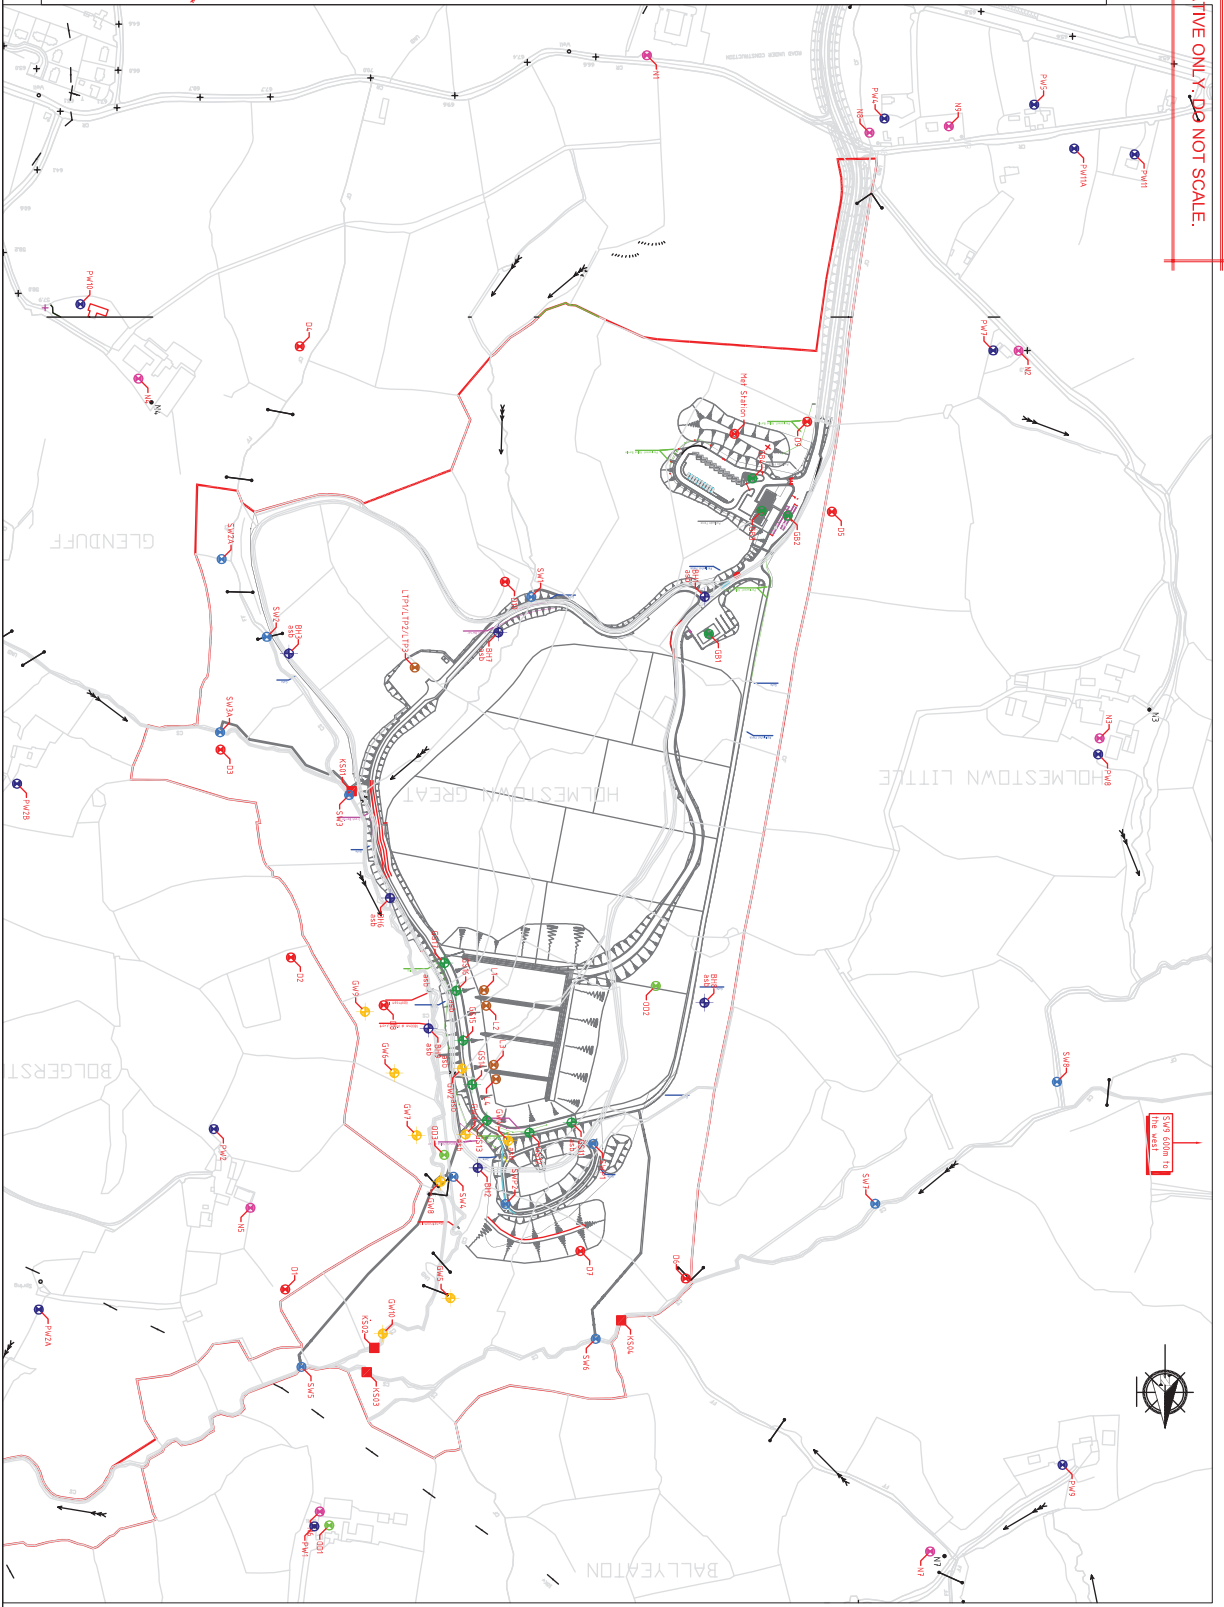

Legend

- Gas Monitoring Well
- Private Water Point Monitoring Point
- Surface Water Monitoring Point
- Shallow Water Point Monitoring Point
- Private Well (Borehole) Monitoring Point
- Existing Groundwater Monitoring Well
- Leachate Regeneration Plant Monitoring Point
- Reuse Monitoring Point
- Silt Monitoring Point
- Other Monitoring Point
- Methane Gas Investigation Well (Borehole) Monitoring Point
- Strategic Monitoring Point

8101	291925.02	122811.43	0.0000
8102	291926.09	122806.67	0.0000
8103	291927.00	122819.30	24.4388
8104	291928.00	122819.30	0.0000
8105	291929.00	122819.30	0.0000
8106	291930.00	122819.30	0.0000
8107	291931.00	122819.30	0.0000
8108	291932.00	122819.30	0.0000
8109	291933.00	122819.30	0.0000
8110	291934.00	122819.30	0.0000
8111	291935.00	122819.30	0.0000
8112	291936.00	122819.30	0.0000
8113	291937.00	122819.30	0.0000
8114	291938.00	122819.30	0.0000
8115	291939.00	122819.30	0.0000
8116	291940.00	122819.30	0.0000
8117	291941.00	122819.30	0.0000
8118	291942.00	122819.30	0.0000
8119	291943.00	122819.30	0.0000
8120	291944.00	122819.30	0.0000
8121	291945.00	122819.30	0.0000
8122	291946.00	122819.30	0.0000
8123	291947.00	122819.30	0.0000
8124	291948.00	122819.30	0.0000
8125	291949.00	122819.30	0.0000
8126	291950.00	122819.30	0.0000
8127	291951.00	122819.30	0.0000
8128	291952.00	122819.30	0.0000
8129	291953.00	122819.30	0.0000
8130	291954.00	122819.30	0.0000
8131	291955.00	122819.30	0.0000
8132	291956.00	122819.30	0.0000
8133	291957.00	122819.30	0.0000
8134	291958.00	122819.30	0.0000
8135	291959.00	122819.30	0.0000
8136	291960.00	122819.30	0.0000
8137	291961.00	122819.30	0.0000
8138	291962.00	122819.30	0.0000
8139	291963.00	122819.30	0.0000
8140	291964.00	122819.30	0.0000
8141	291965.00	122819.30	0.0000
8142	291966.00	122819.30	0.0000
8143	291967.00	122819.30	0.0000
8144	291968.00	122819.30	0.0000
8145	291969.00	122819.30	0.0000
8146	291970.00	122819.30	0.0000
8147	291971.00	122819.30	0.0000
8148	291972.00	122819.30	0.0000
8149	291973.00	122819.30	0.0000
8150	291974.00	122819.30	0.0000
8151	291975.00	122819.30	0.0000
8152	291976.00	122819.30	0.0000
8153	291977.00	122819.30	0.0000
8154	291978.00	122819.30	0.0000
8155	291979.00	122819.30	0.0000
8156	291980.00	122819.30	0.0000
8157	291981.00	122819.30	0.0000
8158	291982.00	122819.30	0.0000
8159	291983.00	122819.30	0.0000
8160	291984.00	122819.30	0.0000
8161	291985.00	122819.30	0.0000
8162	291986.00	122819.30	0.0000
8163	291987.00	122819.30	0.0000
8164	291988.00	122819.30	0.0000
8165	291989.00	122819.30	0.0000
8166	291990.00	122819.30	0.0000
8167	291991.00	122819.30	0.0000
8168	291992.00	122819.30	0.0000
8169	291993.00	122819.30	0.0000
8170	291994.00	122819.30	0.0000
8171	291995.00	122819.30	0.0000
8172	291996.00	122819.30	0.0000
8173	291997.00	122819.30	0.0000
8174	291998.00	122819.30	0.0000
8175	291999.00	122819.30	0.0000
8176	292000.00	122819.30	0.0000
8177	292001.00	122819.30	0.0000
8178	292002.00	122819.30	0.0000
8179	292003.00	122819.30	0.0000
8180	292004.00	122819.30	0.0000
8181	292005.00	122819.30	0.0000
8182	292006.00	122819.30	0.0000
8183	292007.00	122819.30	0.0000
8184	292008.00	122819.30	0.0000
8185	292009.00	122819.30	0.0000
8186	292010.00	122819.30	0.0000
8187	292011.00	122819.30	0.0000
8188	292012.00	122819.30	0.0000
8189	292013.00	122819.30	0.0000
8190	292014.00	122819.30	0.0000
8191	292015.00	122819.30	0.0000
8192	292016.00	122819.30	0.0000
8193	292017.00	122819.30	0.0000
8194	292018.00	122819.30	0.0000
8195	292019.00	122819.30	0.0000
8196	292020.00	122819.30	0.0000
8197	292021.00	122819.30	0.0000
8198	292022.00	122819.30	0.0000
8199	292023.00	122819.30	0.0000
8200	292024.00	122819.30	0.0000

* - Approval to be checked on file

Wexford County Council



Holmestown Waste Management Facility

Wexford County Council,
Wexford
Tel: 053-9120922

Drawing Notes

Project Title
Holmestown Waste Management Facility

Appendix G2
Monitoring Locations

Drawn	F. Ryan
Checked	FH
Date	21-06-12
Scale	1:6000
Surveyed	FR
Drawing No.	001

Includes Ordnance Survey Ireland data reproduced under OSI Licence Number 2008/10 CCMA/ Wexford County Council. Unauthorised reproduction infringes Ordnance Survey Ireland and Government of Ireland Copyright. ? Ordnance Survey Ireland 2004