


# **EPA Application Form**

7.5 - Noise Emissions - Attachment

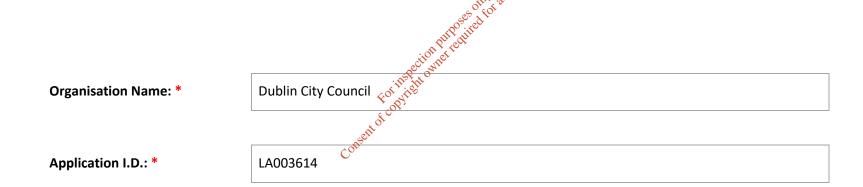

## **Amendments to this Application Form Attachment**

Version No.	Date	Amendment since previous version	Reason
V.1.0	July 2017	N/A	Online application form attachment
As above	Mar 2018	Identification of required fields	Assist correct completion of attachment
		Se.	
		as on others.	
		oses of for all	

<sup>\*</sup> indicates required field



## Noise Emissions (see Note i at the end of this attachment)

Note: An assessment of the impacts of noise, where applicable, should be uploaded in Tab 7 – 'Emissions Overview' of the application form.

Provide detail of measures to reduce noise emissions (list techniques)

(See Note ii at the end of this attachment)

Facility design incorporating 3m high solid boundary wall (increasing to 5m around the entrance to the civic amenity facility on Carton Way) in addition to the location of high noise activities away from noise sensitive receptors;

External site activities will be managed to minimise dropping of materials from heights and onto undamped surfaces to minimise impact activities from within the site;

The operation of high noise activities will be strictly controlled to avoid operating at the most sensitive periods;

Vehicles on site will be switched off when not in use to minimise any excessive noise from idling engines; and All operational plant will be switched off during evening and night-time periods when the facility is not in operation.

Following the *Guidance Note for Noise: Licence Applications, Surveys and Assessments Relation to Scheduled Activities (NG4)* (2012 as amended) complete the table below, inputting summary details of noise monitoring points (see Note iii at the end of this attachment) and proposed noise limit criteria.

				Proposed Noise Limit Criteria				
Monitoring point code <sup>1</sup>	Easting <sup>2</sup>	Northing 3	Monitoring point type <sup>4</sup>	Max. poise level daytime dB L <sub>Ar,T</sub> (30 mins)	Max. noise level evening dB L <sub>Ar,T</sub> (30 mins)	Max. noise level night dB L <sub>eq,T</sub> (15-30 mins)	How was the noise limit derived? <sup>5</sup>	Proposed monitoring frequency
N1	314842	240841	Noise Sensitive Location	55	50	45	NG4	As required. No scheduled monitoring

<sup>1</sup> The following convention should be observed when labelling noise monitoring points:

N1, N2,......The monitoring locations should be identified on an accompanying site plan drawing(s) uploaded in Tab 3 – 'Site' of the application form.

<sup>2</sup> Six Digit GPS Irish National Grid Reference of Monitoring Point

<sup>3</sup> Six Digit GPS Irish National Grid Reference of Monitoring Point

<sup>4</sup> Monitoring point type options: 'Boundary', 'Noise Sensitive Location' or 'Permanent Noise Monitoring'

<sup>5</sup> Derived noise limit options: 'BAT', 'EQS', or 'Derogation'

<sup>\*</sup> indicates required field



				Proposed Noise Limit Criteria				
Monitoring point code <sup>1</sup>	Easting <sup>2</sup>	Northing 3	Monitoring point type <sup>4</sup>	Max. noise level daytime dB L <sub>Ar,T</sub> (30 mins)	Max. noise level evening dB L <sub>Ar,T</sub> (30 mins)	Max. noise level night dB L <sub>eq,T</sub> (15-30 mins)	How was the noise limit derived? 5	Proposed monitoring frequency
								proposed.
				Consent of constitution		Tuse.		
					24. 20	y other		
					30 <sup>Ses</sup> official			
					ation purificult			
				or inst	et own			
				of copyr				
				Consent				

Note: Map(s)/drawing(s) uploaded under 'Site Plans' in Tab 3 of the application form should identify the emission and monitoring points.

<sup>\*</sup> indicates required field



Was an assessment for tonal and impulsive noise carried out? <sup>6</sup> (Yes/No)	No tonal or impulsive noise anticipated from the noise sources identified.		
If 'Yes' was tonal or impulsive noise identified to be present? (Yes/No)	Not Applicable.		

For emissions outside the EPA Noise Guidance Note limit, see the Agency's *Guidance Note for Noise: Licence Applications, Surveys and Assessments in Relation to Scheduled Activities (NG4)* (2012) (available on <a href="https://www.epa.ie">www.epa.ie</a>), a full evaluation of the existing abatement/treatment system must be provided. A planned programme of improvement towards meeting upgraded standards is required to be uploaded with this document. This programme should highlight specific goals and a time scale, together with options for modification, upgrading or replacement, as required, to bring the emissions within the limits as set out in the Guidance Note.

Refer to section 5 of the Agency's Guidance Note for Noise: Licence Applications, Surveys and Assessments in Relation to Scheduled Activities (NG4) (2012 as amended).

<sup>\*</sup> indicates required field



Note i This part of the application form collects data on noise emissions namely measures used to reduce noise and noise levels at a reference distance under normal operation. As noise emissions can arise from different sources on a site, the EPA usually considers the total emission from the site. Please note that emission limit values and monitoring requirements in any proposed licence shall be based on the information supplied hereunder.

Note ii Measures are usually required to reduce, minimise or prevent emissions from occurring. They may involve the application of a single technique or a combination of techniques including housing, insulation and appropriate location of equipment. List all techniques proposed/employed. Technique(s) employed must comply with BAT. Highlight additional measures required for the purposes of protecting the environment. The measures or techniques to be taken must be capable of complying with the proposed/known emission level(s).

The measures required shall be informed by the following:

- 1. BAT techniques
- 2. Stricter measures/techniques than BAT
- 3. BAT determined by competent authority in consultation with the applicant
- 4. Other measures

Note iii An individual record (i.e. row) is required for each monitoring point. A national Grid Reference (12 digit, 6E, 6N) must be given for each monitoring point. Noise emissions differ from other emissions in that they are generally limited at a reference distance from the source(s). This reference distance should be, where possible, the boundary of the installation but in certain circumstances it is a noise sensitive location outside the boundary of the installation. Noise levels along a boundary will vary due to the location and positioning of noise sources and the 'worst case' should always be selected. Sufficient points should be identified to fully describe the noise levels from the installation. For waste activities, traffic noise emissions should be taken into account especially if it. The Agency's Guidance Note for Noise: Licence Applications, Surveys and Assessments in Relation to Scheduled Activities (NG4) (2012) and Guidance Note on Noise assessment of Wind Turbine Operations at EPA licensed Sites (NG3)(as appropriate) should be consulted when setting proposed sound limits.

<sup>\*</sup> indicates required field