




**FEHILY  
TIMONEY**

CONSULTANTS IN ENGINEERING,  
ENVIRONMENTAL SCIENCE & PLANNING

# APPENDIX 1

Tier 1 Risk Assessment

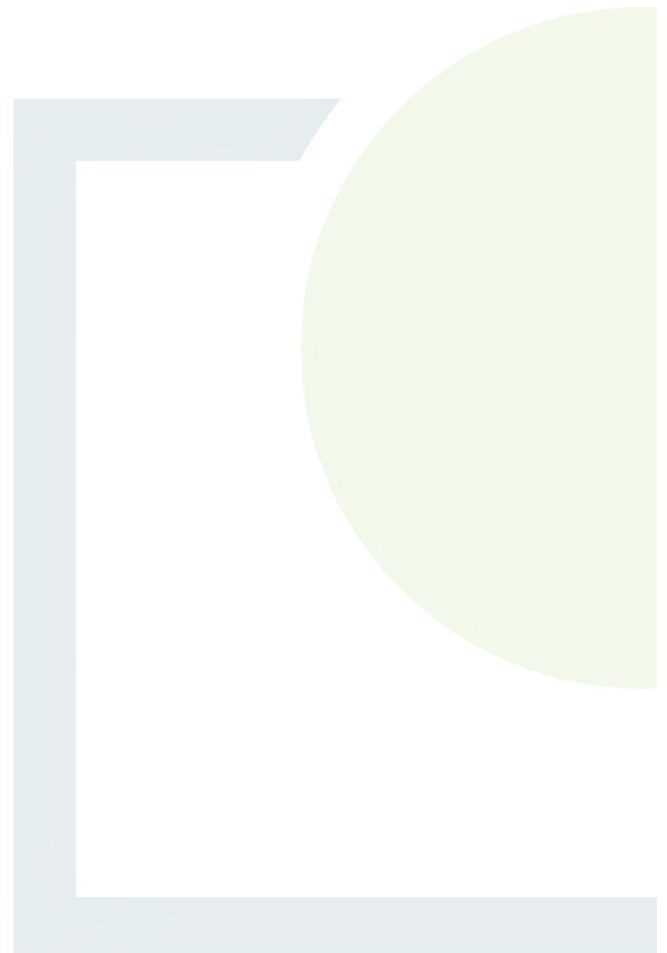

### 3. Source – Pathway - Receptor Scores

SPR	Maximum Score	SPR Value	Linkages	Normalised Score
1	$10 \times (3+5+2) \times 3 = 300$	$7 \times (2+1+2) \times 3 = 105$	leachate – s/water	35%
2	$10 \times (3+5+2) \times 3 = 300$	$7 \times (2+1+2) \times 1 = 35$	leachate - GWDTE	12%
3	$10 \times (3+5) \times 3 = 240$	$7 \times (2+1) \times 2 = 42$	leachate – private wells	18%
4	$10 \times (3+5) \times 3 = 240$	$7 \times (2+1) \times 1 = 21$	leachate - GWDTE	9%
5	$10 \times (3+5) \times 5 = 400$	$7 \times (2+1) \times 3 = 63$	leachate – aquifer	16%
6	$10 \times (3+5) \times 7 = 560$	$7 \times (2+1) \times 0 = 0$	leachate - PWS	0%
7	$10 \times (3+5) \times 3 = 240$	$7 \times (2+1) \times 3 = 63$	leachate – s/water	27%
8	$10 \times 2 \times 3 = 60$	$7 \times 2 \times 3 = 42$	leachate – s/water	<b>70%</b>
9	$10 \times 2 \times 3 = 60$	$7 \times 2 \times 1 = 14$	leachate - GWDTE	24%
10	$10 \times 3 \times 5 = 150$	$7 \times 1 \times 3 = 21$	landfill gas - humans	14%
11	$10 \times 5 \times 5 = 250$	$7 \times 1 \times 3 = 21$	landfill gas - humans	9%

Risk Classification	Range of Risk Scores
Highest Risk (Class A)	Greater than or equal to 70% for any individual SPR linkage
Moderate Risk (Class B)	Between 40-70% for any individual SPR linkage
Lowest Risk (Class C)	Less than or equal to 40% for any individual SPR linkage

<b>OVERALL RISK RATING</b>	<b>HIGH</b>
----------------------------	-------------




**FEHILY  
TIMONEY**

**CONSULTANTS IN ENGINEERING,  
ENVIRONMENTAL SCIENCE & PLANNING**

## **APPENDIX 2**

Site Walkover Checklist and  
Photographic Log

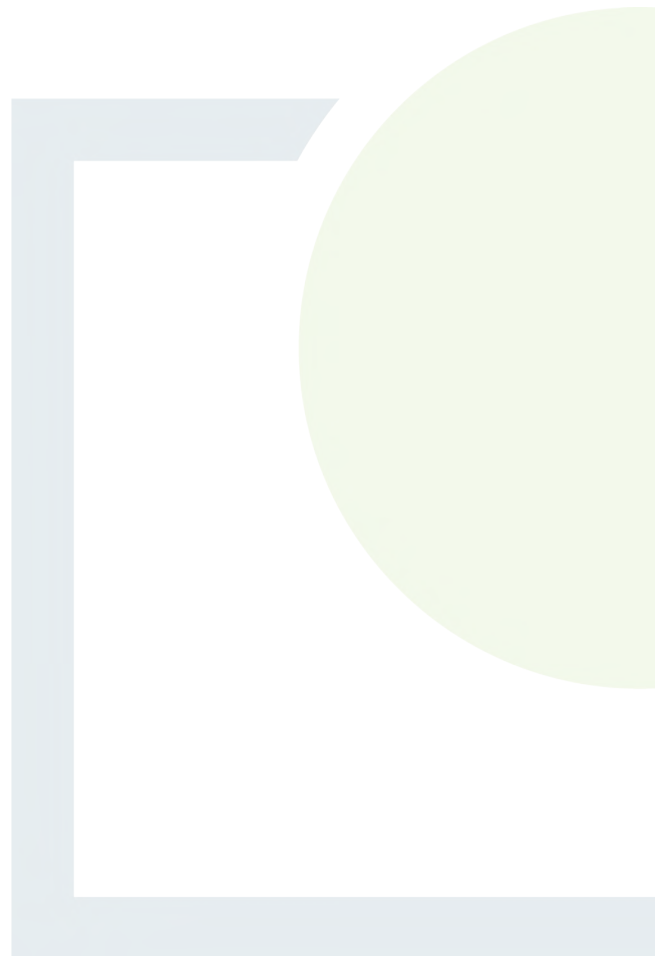

# PHOTOGRAPHIC LOG



**Client Name:**  
Galway Co. Co.

**Site Location:** Gort Historic Landfill

**Project Number:** P2282

**Photo No.**  
**1**

**Date:**  
20-05-20

**Description:**

River upstream, near Holy Well, potential monitoring location



**Photo No.**  
**2**

**Date:**  
20-05-20

**Description:**

Holy Well, off-site St Machtans



# PHOTOGRAPHIC LOG



**Client Name:**  
Galway Co. Co.

**Site Location:** Gort Landfill

**Project Number:** P2282

**Photo No.**  
**3**

**Date:**  
20-05-20

**Description:**

Deposition of stone/construction and demolition waste to land adjacent the landfill area



**Photo No.**  
**4**

**Date:**  
20-05-20

**Description:**

Control cabinet with ESB metered connection, assumed pump controller, ON Off Auto settings



# PHOTOGRAPHIC LOG



**Client Name:**  
Galway Co. Co.

**Site Location:** Gort Landfill

**Project Number:** P2282

**Photo No.**  
5

**Date:**  
20-05-20

**Description:**

Pump sump (dilapidated), assumed leachate management system, note level sensor cable, gate valve non return valve.



**Photo No.**  
6

**Date:**  
20-05-20

**Description:**

Landfill adjacent to river bank



# PHOTOGRAPHIC LOG



**Client Name:**  
Galway Co. Co.

**Site Location:** Gort Landfill

**Project Number:** P2282

**Photo No.**  
**7**

**Date:**  
20-05-20

**Description:**  
Landfill Area



**Photo No.**  
**8**

**Date:**  
20-05-20

**Description:**  
Landfill area



# PHOTOGRAPHIC LOG



**Client Name:**  
Galway Co. Co.

**Site Location:** Gort Landfill

**Project Number:** P2282

**Photo No.**  
**9**

**Date:**  
20-05-20

**Description:**

Groundwater monitoring infrastructure to North East of site



**Photo No.**  
**10**

**Date:**  
20-05-20

**Description:**

Foul water main river crossing – Potential downstream monitoring location





# PHOTOGRAPHIC LOG



**Client Name:**  
Galway Co. Co.

**Site Location:** Gort Landfill

**Project Number:** P2282

**Photo No.**  
**11**

**Date:**  
20-05-20

**Description:**  
View of landfill



**Photo No.**  
**12**

**Date:**  
20-05-20

**Description:**  
Groundwater monitoring  
borehole at site entrance



# PHOTOGRAPHIC LOG



**Client Name:**  
Galway Co. Co.

**Site Location:** Gort Landfill

**Project Number:** P2282

**Photo No.**  
13

**Date:**  
20-05-20

**Description:**

Historic Photo - 1973  
Builders Providers

Landfill Operation in  
Background



**Photo No.**  
14

**Date:**  
20-05-20

Walkover Survey Checklist

Gort Historic Landfill Co. Galway

Walkover Survey Checklist		
Information	Checked	Comment (include distances from Site Boundary)
1. What is the current land use?	✓	Privately owned site used for grazing horses
2. What are the neighbouring land uses?	✓	Gort river to West, North, Southern site derelict with stone fill, Station road to Eastern boundary with stone yard and Builders providers beyond
3. What is the size of the site?	✓	1.7 ha approx.
4. What is the topography?	✓	Generally flat, unnatural elevated above river. Sloping East to west from access road (Station road) to river
5. Are there potential receptors (if yes, give details)?	✓	
Houses	✓	Industrial building to East, Other building across river to West
Surface water features (if yes, distance and direction of flow)?	✓	Gort River
Any wetland or protected areas?	✓	
Public water supplies?	✓	Unknown, assumed unlikely, due to urban nature
Private wells?	✓	No evidence, abandoned holy well to South
Services?	✓	Overhead electrical services to North
Other buildings?	✓	No
Other?		Derelict leachate pumping manhole from previous remediation works including rising main
6. Are there any potential sources of contamination (if yes, give details)?		
Surface waste (if yes, what type)?	✓	Minor visual evidence (exposed buried waste)


Walkover Survey Checklist

Gort Historic Landfill Co. Galway

Walkover Survey Checklist		
Information	Checked	Comment (include distances from Site Boundary)
Surface ponding of leachate	✓	No evidence
Leachate seepage	✓	No evidence
Landfill gas odours	✓	None noted
7. Are there any outfalls to surface water? (If yes, are there discharges and what is the nature of the discharge?)	✓	None note
8. Are there any signs of impact on the environment? (if yes, take photographic evidence)	✓	None noted
Vegetation die off, bare ground	✓	No
Leachate seepages	✓	No
Odours	✓	No
Litter	✓	Minor surface evidence of buried waste
Gas bubbling through water	✓	No
Signs of settlement	✓	No
Subsidence, water logged areas	✓	No
Drainage or hydraulic issues	✓	Generally, poorly drained/non-productive grasslands
Downstream water quality appears poorer than upstream water quality	✓	No visual deterioration
9. Are there any indications of remedial measures? (Provide details)		
Capping	✓	Site capped with soil
Landfill gas collection	✓	No
Leachate collection	✓	Yes, abandoned leachate collection and pumping system, pump control unit, manhole, rising main see Photolog
10. Describe fences and security features (if any)	✓	Site fenced newly fenced along eastern boundary – three strand barbed wire.

Walkover Survey Checklist

Gort Historic Landfill Co. Galway

Walkover Survey Checklist		
Information	Checked	Comment (include distances from Site Boundary)
Any other relevant information?		Proposed river walk along embankment. 1973 Aerial Photo – see photolog




**FEHILY  
TIMONEY**

CONSULTANTS IN ENGINEERING,  
ENVIRONMENTAL SCIENCE & PLANNING

## **APPENDIX 3**

Minerex Geoservices  
Geophysical Survey Report

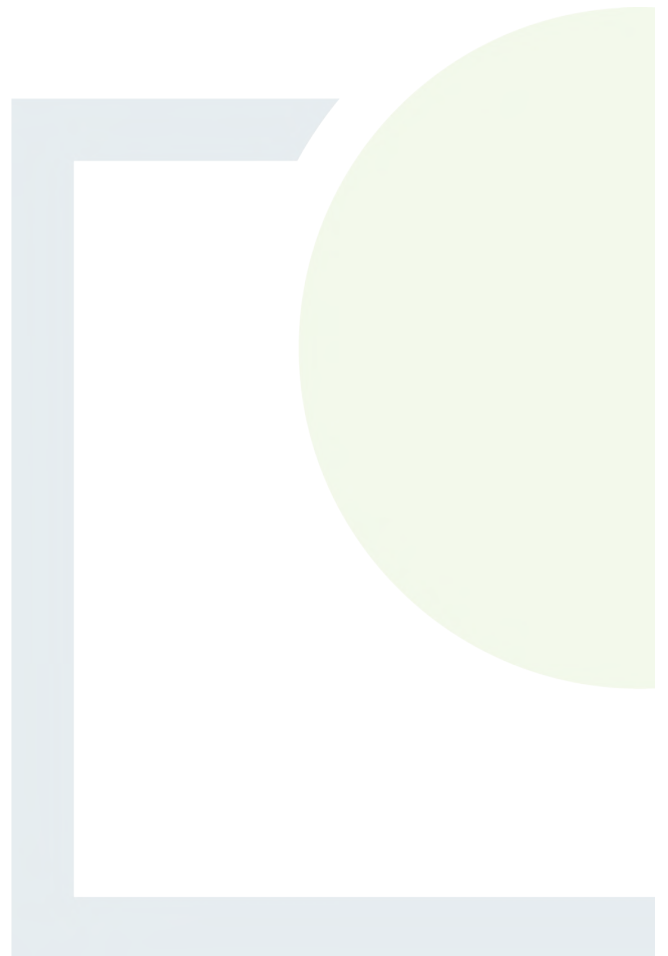

Gort Historic Landfill  
Gort Co. Galway  
**Geophysical Survey**

Report Status: Final

*MGX Project Number: 6499*

*MGX File Ref: 6499f\_Gort-005.doc*

17<sup>th</sup> December 2020

**Confidential Report To:**

**Fehliy Timoney & Co.**

J5 Plaza  
North Park Business Park  
North Road  
Dublin 11

**Report submitted by:  
Minerex Geophysics Limited**

Unit F4, Maynooth Business Campus  
Maynooth, Co. Kildare, W23X7Y5  
Ireland  
Tel.: 01-6510030  
Email: [info@mgx.ie](mailto:info@mgx.ie)

**Issued by:**

---

Author: John Connaughton (Geophysicist)

---

Reviewer: Hartmut Krahn (Senior Geophysicist)



Subsurface Geophysical Investigations

## EXECUTIVE SUMMARY

1. Minerex Geophysics Ltd. (MGX) carried out a geophysical survey consisting of EM31 ground conductivity, 2D-Resistivity and seismic refraction (p-wave) surveying for the ground investigation of the Gort historic landfill, County Galway.
2. The main objectives of this survey were to identify the extent and depth of the former landfill site, quantify the volume of the waste, provide information on nature of the waste body, waste type and composition, look for evidence of leachate migration from the site and provide information on the underlying subsoil and bedrock.
3. The online geological map of Ireland (GSI, 2019) indicates the bedrock under the site is Waulsortian Limestones, described as massive unbedded lime-mudstone.
4. The EM31 Ground Conductivity survey shows high conductivities in the middle of the site which indicates mainly domestic and industrial waste material. The conductivities decrease towards the periphery of the site which indicates more construction and demolition waste material. The extent of the waste material on the site covers an area of 16,500 m<sup>2</sup>.
5. The depth of the waste layer extends to the level of the floodplain and river water level which is around 17.5 – 18.75 mOD. The total average depth of waste material is approx. 3.5 m.
6. Total volume of waste material is calculated as 57,750 m<sup>3</sup>.
7. The layer below the landfill may consist of clay or peat overburden or overburden with leachate.
8. Fresh rock below this layer minimises migration of leachate but there appears to be some leachate migration into the rock close to the river.



# **CONTENTS**

<b>1. INTRODUCTION.....</b>	<b>1</b>
1.1 Background.....	1
1.2 Objectives.....	1
1.3 Site Description.....	1
1.4 Geology .....	1
1.5 Report .....	2
<b>2. GEOPHYSICAL SURVEY .....</b>	<b>3</b>
2.1 Methodology .....	3
2.2 EM31 Ground Conductivity.....	3
2.3 2D-Resistivity.....	4
2.4 Seismic Refraction .....	4
2.5 Site Work.....	4
<b>3. RESULTS AND INTERPRETATION .....</b>	<b>5</b>
3.1 EM31 Ground Conductivity.....	5
3.2 2D-Resistivity.....	5
3.3 Seismic Refraction .....	6
3.4 Interpretation of Resistivity and Seismic Refraction.....	7
<b>4. CONCLUSIONS AND RECOMMENDATIONS .....</b>	<b>9</b>
<b>5. REFERENCES .....</b>	<b>11</b>

## List of Tables, Maps and Figures:

<b>Title</b>	<b>Pages</b>	<b>Document Reference</b>
Table 1: Geophysical Survey Locations and Acquisition Parameters	In text	In text
Table 2: Summary of Interpretation	In text	In text
Map 1: Geophysical Survey Location Map	1 x A3	6499f_Gort_MapsFigs.dwg
Map 2: EM31 Ground Conductivity Contour Map	1 x A3	6499f_Gort_MapsFigs.dwg
Map 3: Geophysical Survey Interpretation Map	1 x A3	6499f_Gort_MapsFigs.dwg
Figure 1: Models of Geophysical Survey	1 x A3	6499f_Gort_MapsFigs.dwg
Figure 2: Interpretation of Geophysical Survey	1 x A3	6499f_Gort_MapsFigs.dwg

## **1. INTRODUCTION**

### **1.1 Background**

Minerex Geophysics Ltd. (MGX) carried out a geophysical survey at an historic landfill in Gort, Co. Galway. The survey consisted of EM31 ground conductivity, 2D-Resistivity and seismic refraction (p-wave) measurements. The survey was commissioned by Fehily Timoney & Co.

The survey employed various geophysical methods that complement each other and improve the interpretation. The role of geophysics as a non-destructive fast method is to allow later targeted direct investigations. Those results can be used to improve the initial results and interpretation.

A geophysical survey is a fast and effective way to investigate the waste size, extent and possible leachate from the landfill in a non-invasive manner. The geological background is also investigated a part of the survey. This survey is part of the Tier 2 site investigation and test report.

### **1.2 Objectives**

The main objectives of the geophysical survey were:

- Identify the extent and depth of the former landfill
- Quantify the volume of the waste
- Provide information on the nature of the waste body, waste type and composition
- Look for evidence of leachate migration from the site
- Provide information on the underlying subsoil and bedrock

### **1.3 Site Description**

The site is located off Bridge Street on a site of approx. 2ha. The L85075 runs along the eastern edge of the site while the Gort River borders the west side. There is scrub land to the south and agricultural land to the west. At the time of surveying, the river water elevation was 17.56 mOD while the highest point surveyed on the landfill was 22.5 mOD.

### **1.4 Geology**

The online bedrock geological map of Ireland (GSI, 2019) describes the quaternary sediments as till derived from limestone. The survey area is underlain by Waulsortian limestone, described as massive unbedded lime-mudstone.

The nearest karst features are over 1.5 km away from the site. There is a fault running SW-NE located approx. 150 m south of the site.

## **1.5 Report**

This report includes the results and interpretation of the geophysical survey. Maps, figures and tables are included to illustrate the results of the survey. More detailed descriptions of geophysical methods and measurements can be found in GSEG (2002), Milsom (1989) and Reynolds (1997).

The client provided maps of the site and the digital version was used as the background map in this report. Elevations were surveyed on site and are used in the vertical sections.

The interpretative nature and the non-invasive survey methods must be taken into account when considering the results of this survey and Minerex Geophysics Limited, while using appropriate practice to execute, interpret and present the data, give no guarantees in relation to the existing subsurface.

## 2. GEOPHYSICAL SURVEY

### 2.1 Methodology

The methodology is outlined in the tender documents and consisted of EM31 Ground Conductivity measurements across the site to map and determine targets for additional geophysical methods including 2D-Resistivity Profiling, Seismic Refraction Profiling. These profiles were carried out in different directions through the middle of the waste body as identified through the EM31 ground conductivity survey.

The survey locations are indicated on Map 1. The profiles and parameters are tabulated in Table 1 below.

All geophysical surveys are acquired, processed and reported in accordance with British Standards BS 5930:1999 +A2:2010 'Code of Practice for Site Investigations'.

Table 1: Geophysical Survey Locations and Acquisition Parameters

<b>Profile Name</b>	<b>Electrode/Geophone Spacing/m</b>	<b>Number of Electrodes/Geophones</b>	<b>Profile Length/m</b>
R1	3	54	159
R2	3	64	189
<b>SUM</b>			<b>348</b>
S1	3	54	159
S2	3	64	189
<b>SUM</b>			<b>348</b>

### 2.2 EM31 Ground Conductivity

The EM31 ground conductivity survey was carried out over the area indicated in Map 1 on lines nominally 10 m apart. Along each line a reading of ground conductivity was taken every second while walking along, thereby resulting in a survey grid of nominally 10 x 2 m. The locations were measured with a sub-meter accuracy SERES DGPS system attached to the EM31 and all data was jointly stored in a data logger. The conductivity meter was a GEONICS EM31 with Allegro data logger and NAV31 data acquisition software. The instrument was checked at a base station, the readings were stable and no drift occurred.

EM31 ground conductivity determines the bulk conductivity of the subsurface over a typical depth between 0 and 6 m below ground level (bgl). and over a radius of approx. 5 m around the instrument.

### **2.3 2D-Resistivity**

2D-Resistivity profiles were surveyed with electrode spacing of 3 m, up to 64 electrodes per set-up and a maximum length of 189 m per profile. The readings were taken with a Tigre Resistivity Meter, Imager Cables, stainless steel electrodes, laptop and ImagerPro acquisition software.

During 2D-Resistivity surveying data is acquired in the form of linear profiles using a suite of metal electrodes. A current is injected into the ground via a pair of electrodes while a potential difference is measured across a second pair of electrodes. This allows for the recording of the apparent resistivity in a two-dimensional arrangement below the profile. The data is inverted after the survey to obtain a model of subsurface resistivities. The generated model resistivity values and their spatial distribution can then be related to typical values for different geological and manmade materials.

The penetration depth of a resistivity profile increases towards the centre where it reaches an approx. value of 1/6<sup>th</sup> of the layout length.

### **2.4 Seismic Refraction**

Seismic refraction profiles were surveyed with geophone spacing of 3 m and 24 geophones per set-up resulting in a 69 m length per set-up. The recording equipment consisted of a 24 Channel GEOMETRICS ES-3000 engineering seismograph with 4.5 Hz vertical geophones. The seismic energy source consisted of a hammer and plate. A zero-delay trigger was used to start the recording. Normally 7 shot points per p-wave profile were used.

Set-ups were acquired in longer continuous profiles using common shot points between set-ups and concatenating into longer profiles at the processing stage.

In the seismic refraction survey method, a p-wave is generated by a source at the surface resulting in energy travelling through surface layers directly and along boundaries between layers of differing seismic wave velocities. Processing of the seismic data allows geological layer thicknesses and boundaries to be established.

Seismic Refraction generally determines the depth to horizontal or near horizontal layers where the compaction/strength/rock quality changes with an accuracy of 10 – 20% of depth to that layer. Where low velocity layers or shadow zones are present (e.g., below solid ground surface) or where layers dip with more than 20 degrees angle the accuracy becomes much less.

### **2.5 Site Work**

The data acquisition was carried out between the 21<sup>st</sup> and 29<sup>st</sup> of May 2020. The weather conditions were variable throughout the acquisition period. Health and safety standards were adhered to at all times. The locations and elevations were surveyed with a Carlson NR3 RTK-GPS to accuracy < 0.05 m.

### **3. RESULTS AND INTERPRETATION**

The interpretation of geophysical data was carried out utilising the known response of geophysical measurements, typical physical parameters for subsurface features that may underlay the site, and the experience of the authors.

Direct ground investigations were provided after the survey and conform well with the results of the geophysical survey.

#### **3.1 EM31 Ground Conductivity**

The EM31 ground conductivity values were merged into one data file for the survey area and contoured and gridded with the SURFER contouring package. The contours are created by gridding and interpolation and care must be taken when using the data. The contour map is overlaid over the location and base map (Map 2) and the values in milliSiemens/metre (mS/m) are indicated on the colour scale bar.

Within the top 6 m bgl, the conductivities are characteristic for certain overburden and rock types. If there is a high content of clay minerals (which are electrically conductive) then the overburden conductivity will be higher than as if there is a high content of clastic grains like sand or gravel. The purer the clay and the lower the sand/gravel content the higher the conductivity. The water content in the overburden also influences the conductivity but generally the clay content has a larger effect.

Non-natural material like waste or leachate will generally have a high conductivity or increase the conductivity of the natural geological material. Many waste materials decompose or dissolve in the ground and enrich the ground and water with ions, which increase the conductivity and decrease the resistivity. Waste material from domestic and industrial (D/I) sources generally contain more decomposable or dissolvable material than waste from construction or demolition C&D. Therefore D/I Waste will have lower resistivities and higher conductivities than C&D waste.

The scale used on this site represents the very high conductivity results surveyed throughout the site. The highest conductivities are found in the centre of the site where conductivities are typically above 30 mS/m. Very high conductivities indicate deep D/I waste material. Around the edge of the site the conductivities begin to decrease. Conductivities between 20 – 30 mS/m would indicate some waste material, while conductivities of less than 20 mS/m would usually indicate mainly C&D waste, soil and rock fill or natural material.

#### **3.2 2D-Resistivity**

The 2D-Resistivity data was positioned and inverted with the RES2DINV inversion package. The programme uses a smoothness constrained least-squares inversion method to produce a 2D model of the

subsurface model resistivities from the recorded apparent resistivity values. Three variations of the least squares method are available and for this project the Jacobian Matrix was recalculated for the first three iterations, then a Quasi-Newton approximation was used for subsequent iterations. Each dataset was inverted using seven iterations resulting in a typical RMS error of <3.0%. The resulting models were colour contoured with the same resistivity scale for all profiles and they are displayed as cross sections (Figure 1). A vertical exaggeration of 4 is used for the sections.

The resistivities are the inverse value of the conductivities therefore remarks made above for the conductivity are also valid for the resistivity. It has to be considered that the conductivity is determined as a single bulk value for a depth range from 0 - 6 m bgl while the 2D-Resistivity method determines the values based on depth levels.

Both profiles show a rapid change with depth from low resistivities to high resistivities at approx. 12.5 – 15 mOD. Low resistivities (<62.5 Ohm) indicate mainly D/I waste material or leachate but may also indicate clay-rich or peat overburden. High resistivities (>500 Ohmm) at depth indicate fresh limestone. Higher resistivities near the surface, particularly at the end of the profiles indicate mainly C&D waste or soil and rock fill. At the start of profile R1 towards the river, low resistivities penetrate to about 7.5 mOD. These deeper low resistivities may be due to leachate migration into the rock in this area.

### **3.3 Seismic Refraction**

The seismic refraction data was positioned and processed with the SEISMAGER software package to give a layered model of the subsurface. The number of layers has been determined by analysing the seismic traces and 2 layers were used in the models. All seismic profiles were subject to a standardised processing sequence which consisted of a topographic correction which was based on integrated elevation data, first break picking, tomographic inversion, travel-time computation via ray-tracing and velocity modelling. Residual deviations of typically 0.4 to 1.8 msec RMS have been obtained for each profile. Following each processing stage QC procedures were adhered to. The resulting layer boundaries are shown as thick lines overlaid on the 2D-Resistivity cross sections (Figure 1). The average seismic velocities obtained within the layers are annotated on the sections as bold black numbers.

The p-wave seismic velocity is closely linked to the density of subsurface materials and to parameters like compaction, stiffness, strength and rock quality. The higher the density of the subsurface materials the higher the seismic velocity. Similarly, for the other parameters it is generally valid that a more compacted, stiffer and stronger material will have a higher seismic velocity. For rock, the seismic velocity is higher when the rock is stronger, less weathered and has a higher quality. If the rock is more weathered, broken, fractured, fissured or karstified then the seismic velocity will be reduced compared to that of intact fresh rock.

Because of the above relationship, the seismic refraction method and seismic velocities are suitable to investigate ground where the layers get denser, more compacted and stronger with depth. A disadvantage is



that some materials may have the same seismic velocity, in particular any capping material over the landfill will have a similar seismic velocity range as the waste material below it.

Due to the deep low velocity layer that constitutes the capping and waste material, the accuracy of the layer below is reduced. This is due to the reduced energy being able to penetrate beneath the waste layer. The seismic refraction data primarily indicates the depth of waste material and gives a rough interpretation of the immediate layer beneath it.

The modelled seismic data has created the following layered ground model:

Layer 1 has a thickness of 2 - 5 m below the waste material and seismic velocities of 200 m/s. This velocity would represent waste material and overburden such as made ground. This layer becomes very thin at the start of profile S1 close to the river.

Layer 2 was modelled with a velocity range of 1600 - 2000 m/s and represents primarily natural overburden.

Due to the poor penetration of seismic waves below the landfill, deeper layers could not be accurately interpreted.

### **3.4 Interpretation of Resistivity and Seismic Refraction**

The seismic refraction and 2D-Resistivity provide information on two physical parameters of the waste material, however as discussed above the waste material may share some of these physical parameters with other material. Therefore, by using both methods together a clearer picture of the waste body is obtained.

Waste material generally consists of low velocity, low resistivity material. The 2D-Resistivity data and the seismic refraction data shows a 2 - 5 m deep layer of waste material stretching throughout the site. This layer penetrates to an elevation of 17.5 – 18.75 mOD which is around the same elevation as the river water and flood plain beside it.

Where low resistivities continue into the second seismic layer, this is an indication of leachate in the natural ground below the landfill. The low resistivities below the landfill may also be due to clay-rich or peat overburden.

High resistivities give an indication of rock depth as the seismic refraction model do not penetrate to this depth. High resistivities are between 12.5 and 16 mOD along most of the profiles with the exception of at the start of Profile R1. This deeper intrusion of low resistivities may indicate leachate penetrating into the rock in this area or a deepening of the rock layer.

Table 2 summarises the interpretation. Interpreted cross sections are shown in Figure 2. The interpretation has been made from all available information. The resistivity models have been used to delineate between waste and natural material and the depth to rock. Resistivity data is better suited to show rock types and

features within the rock while seismic refraction velocities are indicating the change of compaction, stiffness or rock quality with depth.

Table 2: Summary of Interpretation

Layer	General Seismic Velocity Range (m/sec)	General Resistivity Range (Ohmm)	Interpretation
1a	200	<62.5	Waste (Mainly Domestic & Industrial)
1b	200	>62.5	Waste (Mainly Construction & Demolition Waste or Soil & Rock Fill)
2	1600 – 2000	<62.5	Overburden with Leachate
3a	N/A	>500 (At Depth)	Fresh Limestone
3b	N/A	<500 (At Depth)	Limestone with Leachate

## 4. CONCLUSIONS AND RECOMMENDATIONS

### Geological Background

The geophysical survey indicates the landfill is underlain by overburden over fresh limestone. The overburden material below the waste material is approx. 2 – 5 m thick and could contain any material like peat, clay or sand and gravel. The fresh limestone should restrict the movement of leachate below the waste and overburden. The survey does not indicate any karst features beneath the landfill.

Rotary Core LH01 indicates 0.5 m of clay under the waste material with deep gravel underlying the clay. Trial pits show clay, sand or peat underlying the waste material with some trial pits refusing on possible rock.

### Lateral extent of waste and landfill boundary

The area outlined in magenta on Map 3 shows the interpreted extent of the landfill using all the information available. The interpreted landfill extent covers an area of approx. 16,500 m<sup>2</sup>.

### Vertical extent (depth) of waste

The thickness/depth has been estimated from the seismic refraction and 2D-Resistivity data. Considering the thickness of the interpreted Layer 1, an average thickness of 3.5 m has been calculated for the waste material. This estimate includes any capping or natural fill material on top of the main waste body.

Including the layer of overburden below the landfill containing leachate (Layer 2), the total depth of waste and leachate reaches an average of 7 m bgl. With a maximum of 15m b.g.l. at 25m on R1/S1.

### Volume of waste

Considering the areas and average thickness above, the volume of the waste body is estimated at 57,750 m<sup>3</sup>.

### Nature of waste

Low resistivities and seismic velocities measured are consistent with industrial and domestic waste near the centre of the landfill while higher resistivities around the periphery are more indicative of C & D type waste.

### Capping layer

There is no engineered capping layer over the landfill and the geophysics survey does not show any significant natural material over the landfill. Trial pits indicate 0.2 – 0.3 m of reworked topsoil.


### Leachate

Leachate is identified in a layer beneath the landfill within the overburden, while deeper leachate may be present near the river at the start of Profile R1/S1. Generally, the fresh limestone below the landfill should

restrict the leachate movement. Leachate towards the river is indicated on Profile R1 and is also likely to occur all along the edge of the landfill facing the river.

## 5. REFERENCES

1. **GSEG 2002.** Geophysics in Engineering Investigations. Geological Society Engineering Geology Special Publication 19, London, 2002.
2. **GSI, 2020.** Online Bedrock Geological Map of Ireland. Geological Survey of Ireland 2020.
3. **Milsom, 1989.** Field Geophysics. John Wiley and Sons.
4. **Reynolds, 1997.** An Introduction to Applied and Environmental Geophysics. John Wiley and Son.

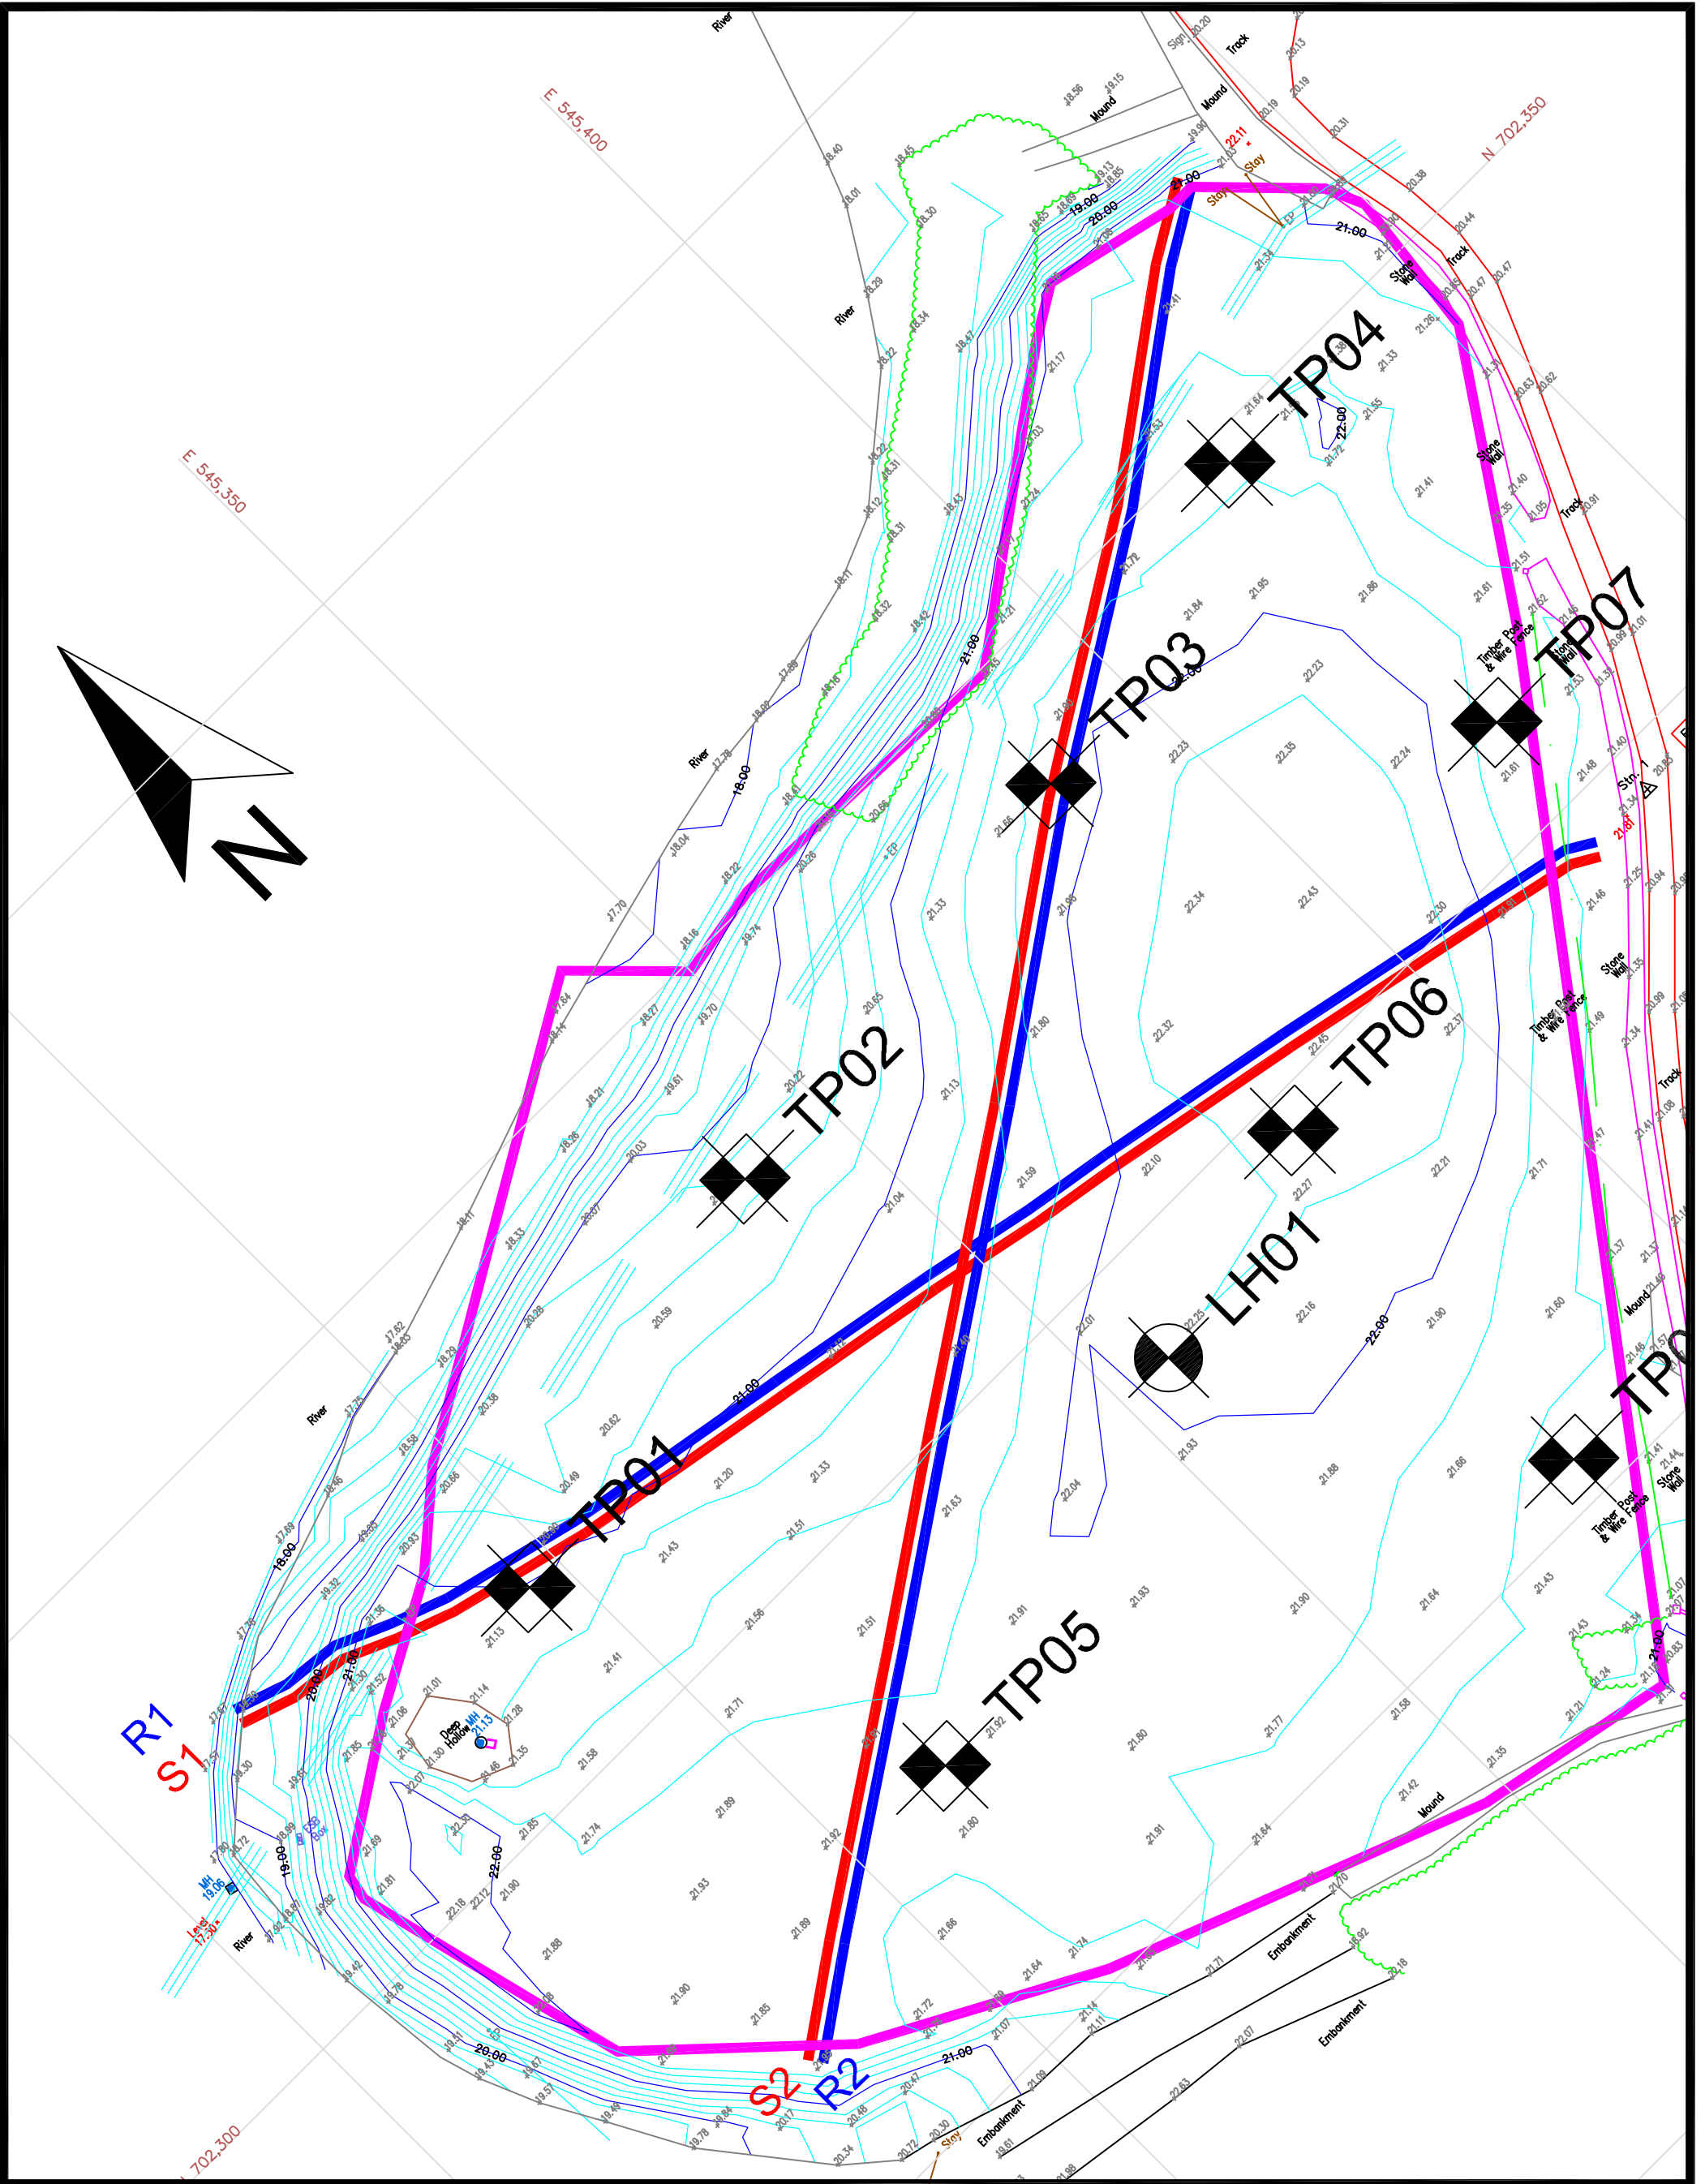

**Minerex**  
Geophysics Limited


Unit F4, Maynooth Business Campus  
Maynooth, Co. Kildare  
Tel. (01) 6510030  
Email: info@mgx.ie  
Web: www.mgx.ie

CLIENT	Fehily Timoney & Company
PROJECT	Gort Historic Landfill Geophysical Survey
TITLE	Map 1: Geophysical Survey Location Map

SCALE:	1:600 @ A3
PROJECT:	6499
DRAWN:	JC
DATE:	17/12/2020
MGX FILE:	6499f_Gort_MapsFigs.dwg
STATUS:	Final

**LEGEND: Geophysical Survey Locations:**

- R2      2D-Resistivity Profile
- S1      Seismic Refraction Profile
- EM31 Survey Area

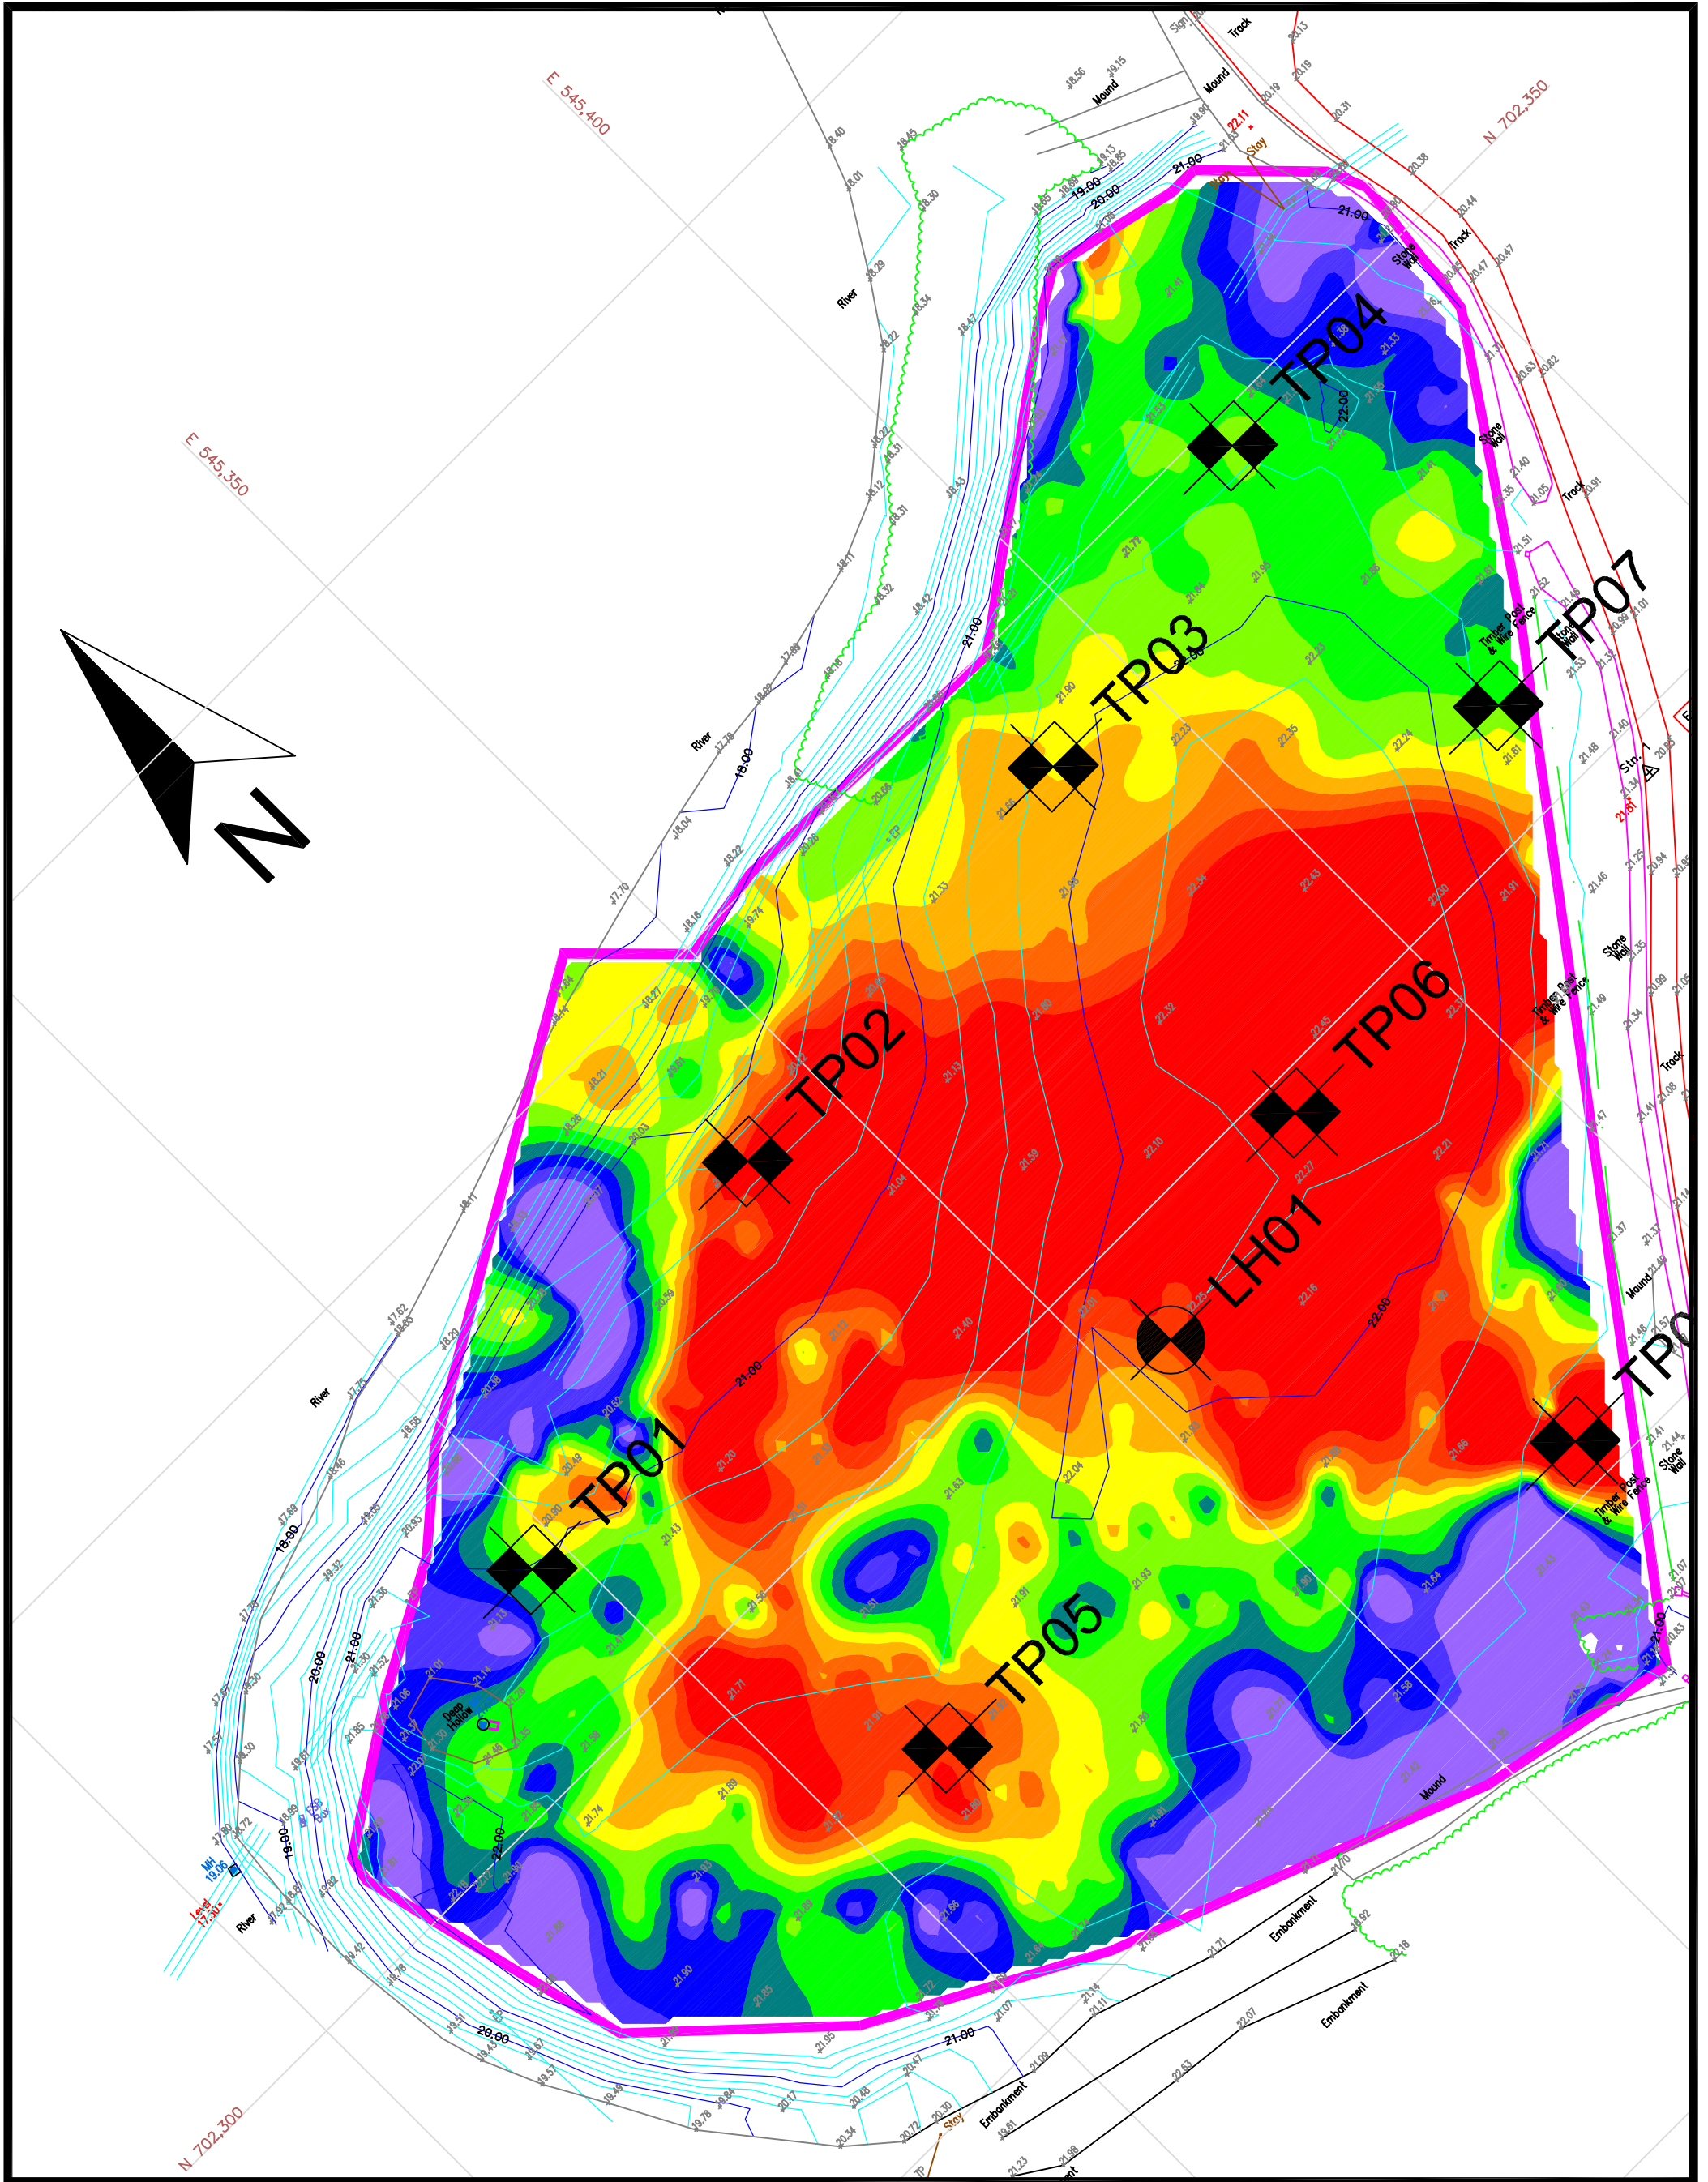

**Minerex**  
Geophysics Limited



Unit F4, Maynooth Business Campus  
Maynooth, Co. Kildare  
Tel. (01) 6510030  
Email: info@mgx.ie  
Web: www.mgx.ie

CLIENT	Fehily Timoney & Company
PROJECT	Gort Historic Landfill Geophysical Survey
TITLE	Map 2: EM31 Ground Conductivity Contour Map

SCALE:	1:500 @ A3
PROJECT:	6499
DRAWN:	JC
DATE:	17/12/2020
MGX FILE:	6499f_Gort_MapsFigs.dwg
STATUS:	Final

**LEGEND: EM31 Ground Conductivity Values:**

The map shows the EM31 ground conductivity contours mS/m. The low (blue) conductivities indicate the C&D waste material or soil and rock fill. The middle range (green) values indicates C&D or D/I waste material. The high (red) values indicates D/I waste.

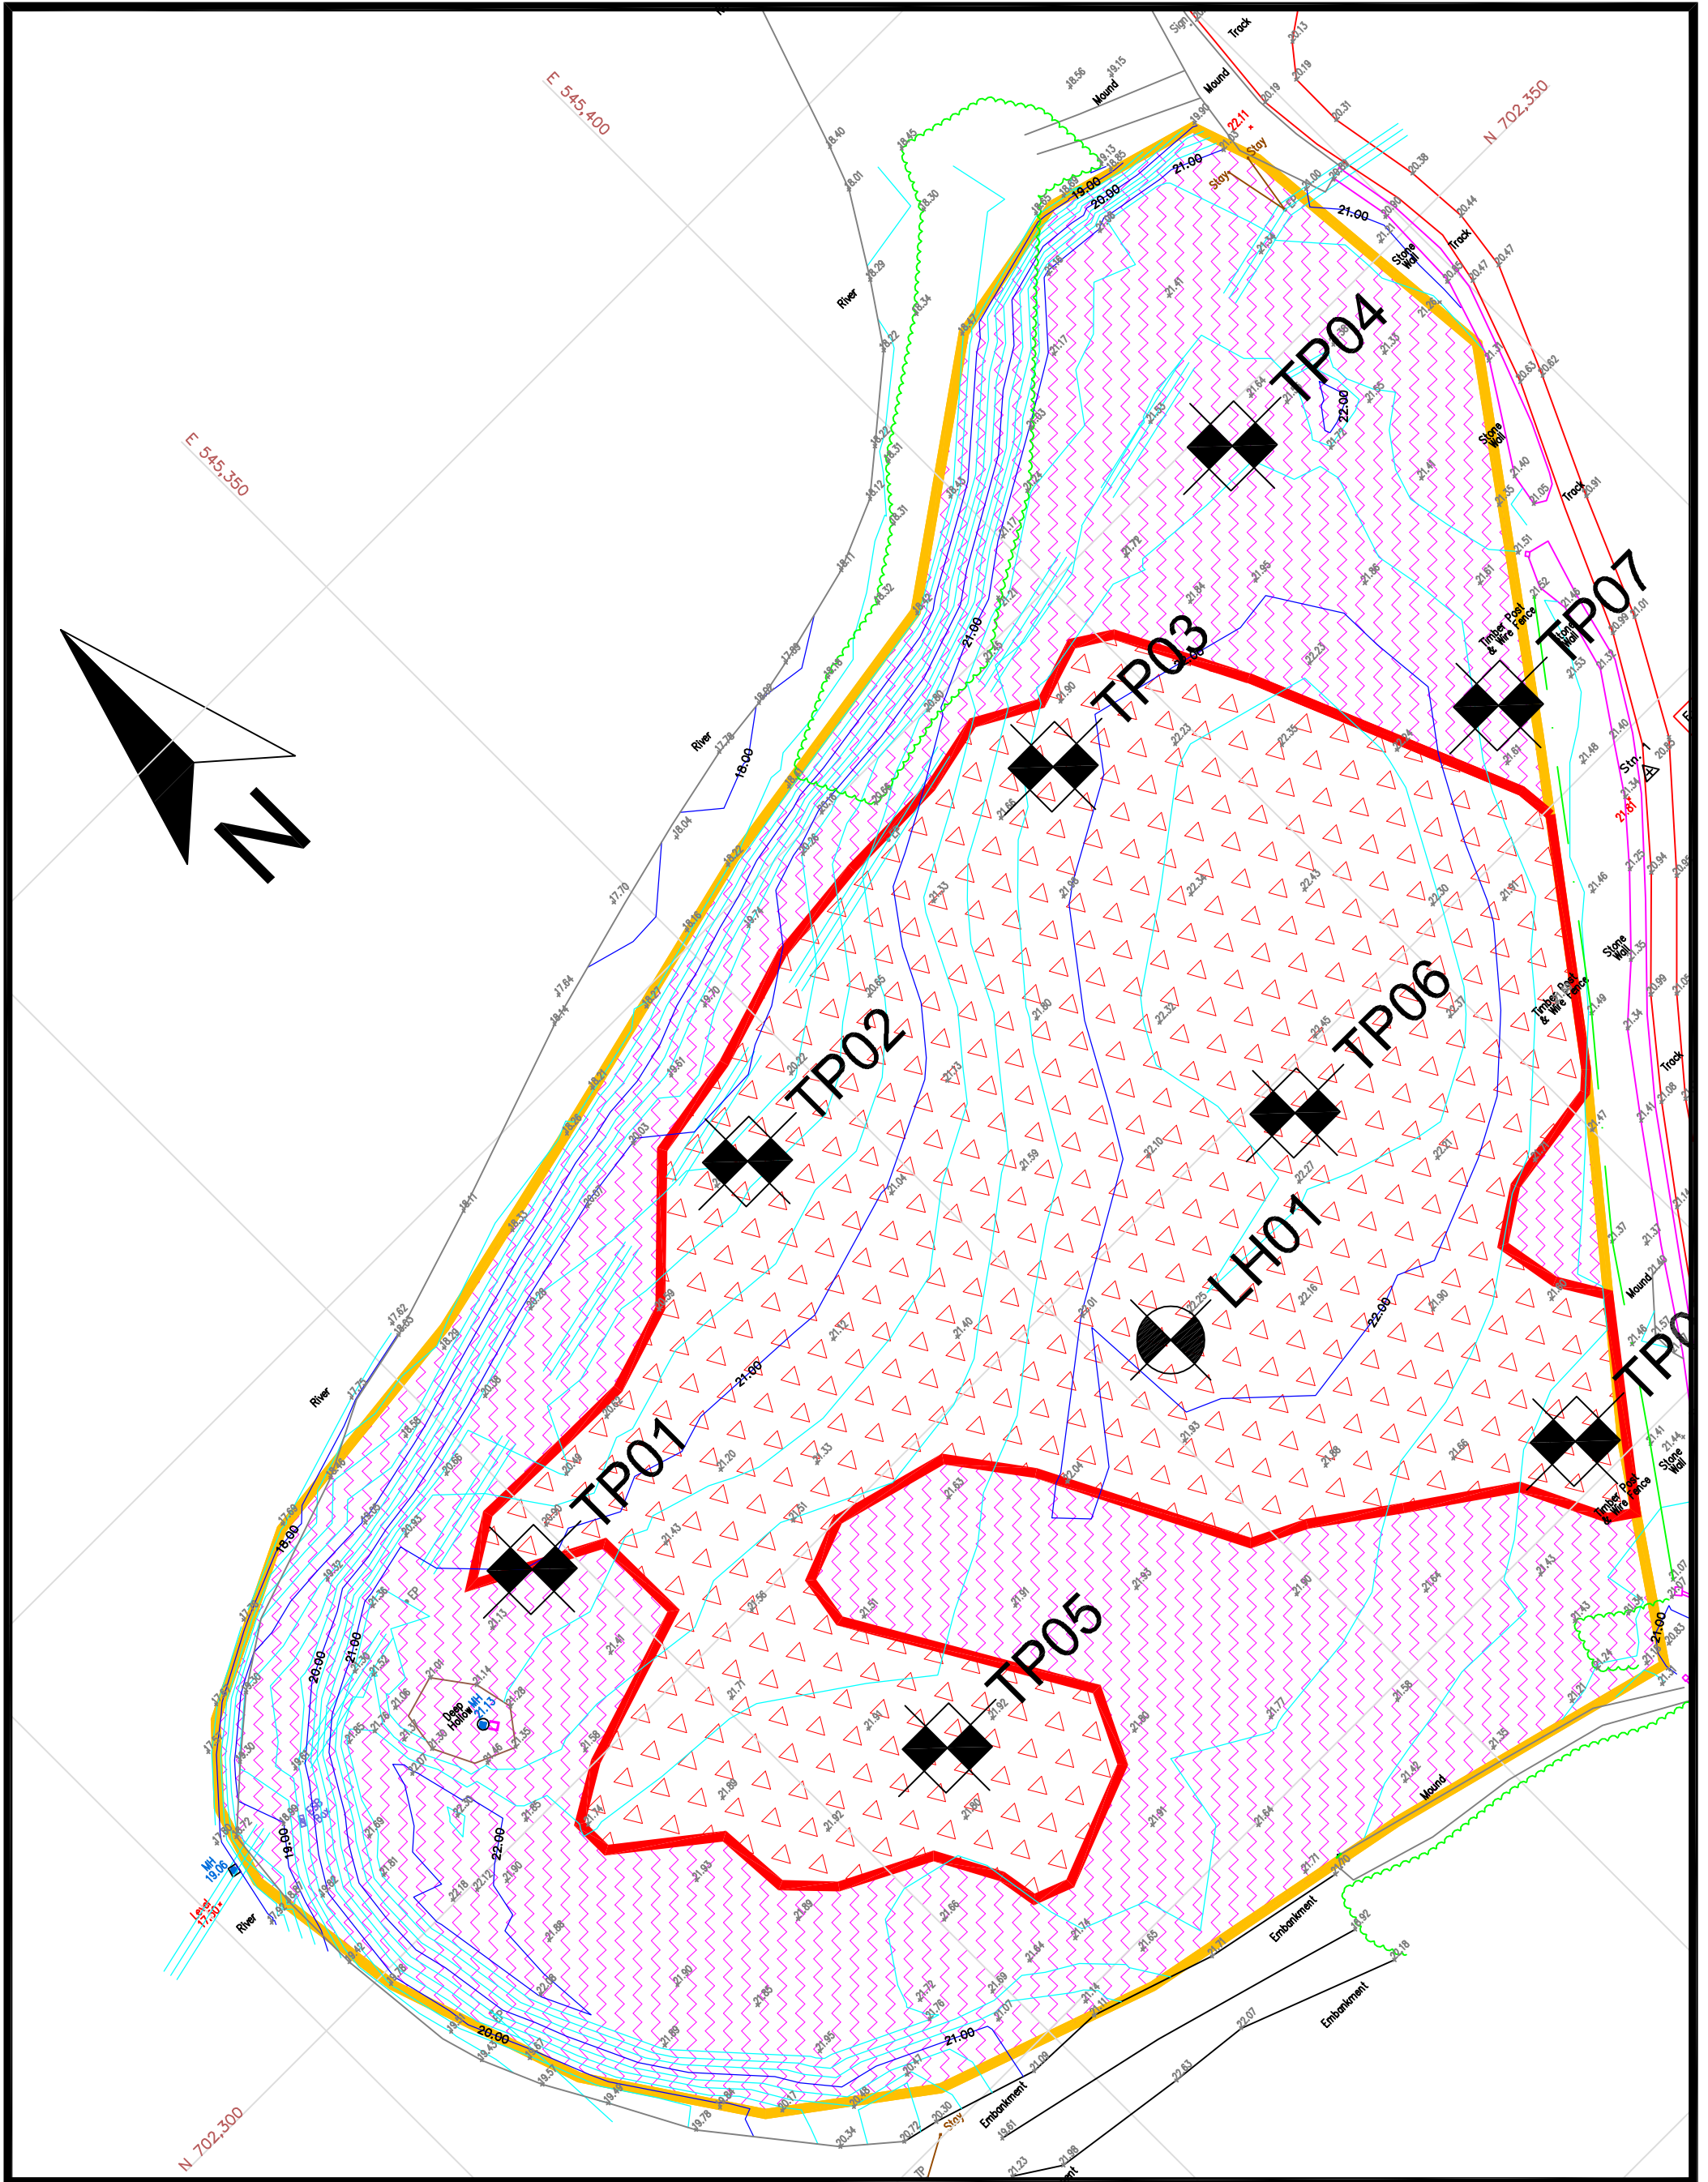

**Minerex**  
Geophysics Limited  
Unit F4, Maynooth Business Campus  
Maynooth, Co. Kildare  
Tel. (01) 6510030  
Email: info@mgx.ie  
Web: www.mgx.ie


CLIENT	Fehily Timoney & Company
PROJECT	Gort Historic Landfill Geophysical Survey
TITLE	Map 3: Geophysical Survey Interpretation Map

SCALE:	1:500 @ A3
PROJECT:	6499
DRAWN:	JC
DATE:	17/12/2020
MGX FILE:	6499f_Gort_MapsFigs.dwg
STATUS:	Final


LEGEND: Geophysical Interpretation:	
	Extent of Mainly C&D waste
	Extent of Mainly D/I Waste




2D-Resistivity Profile R1 and Seismic Refraction Profile S1 Model

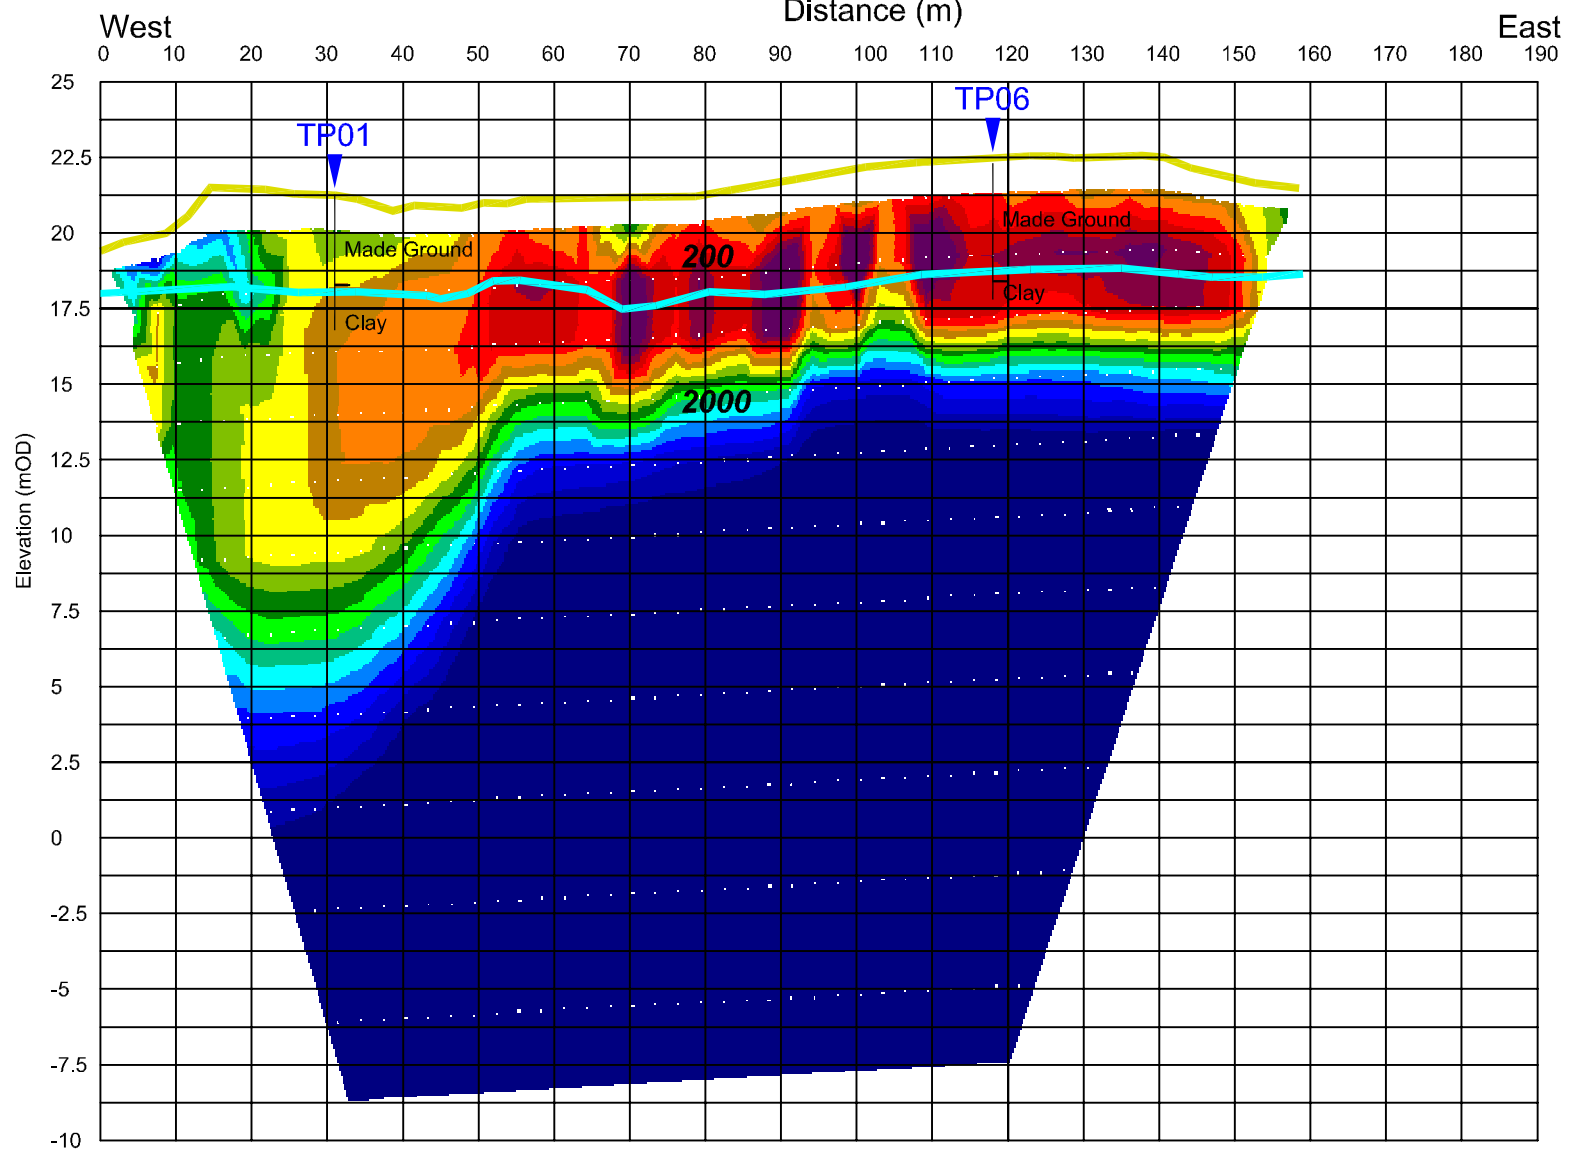


2D-Resistivity Profile R2 and Seismic Refraction Profile S2 Model

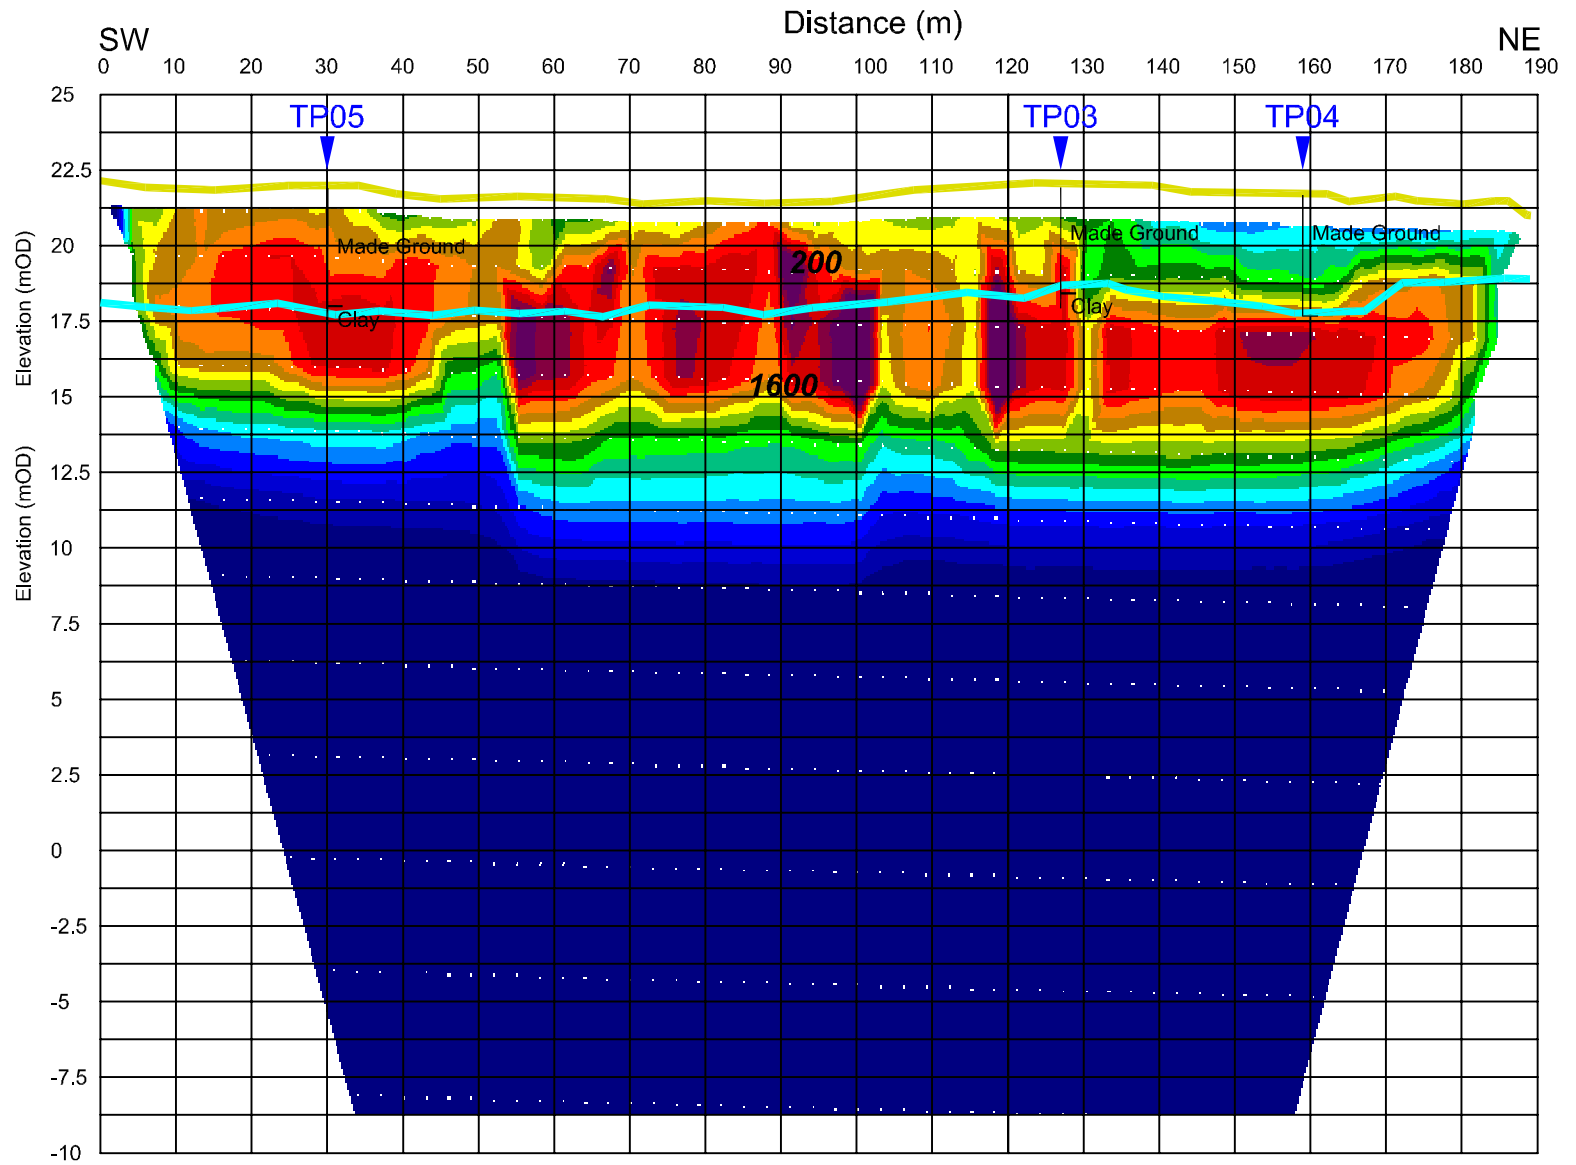



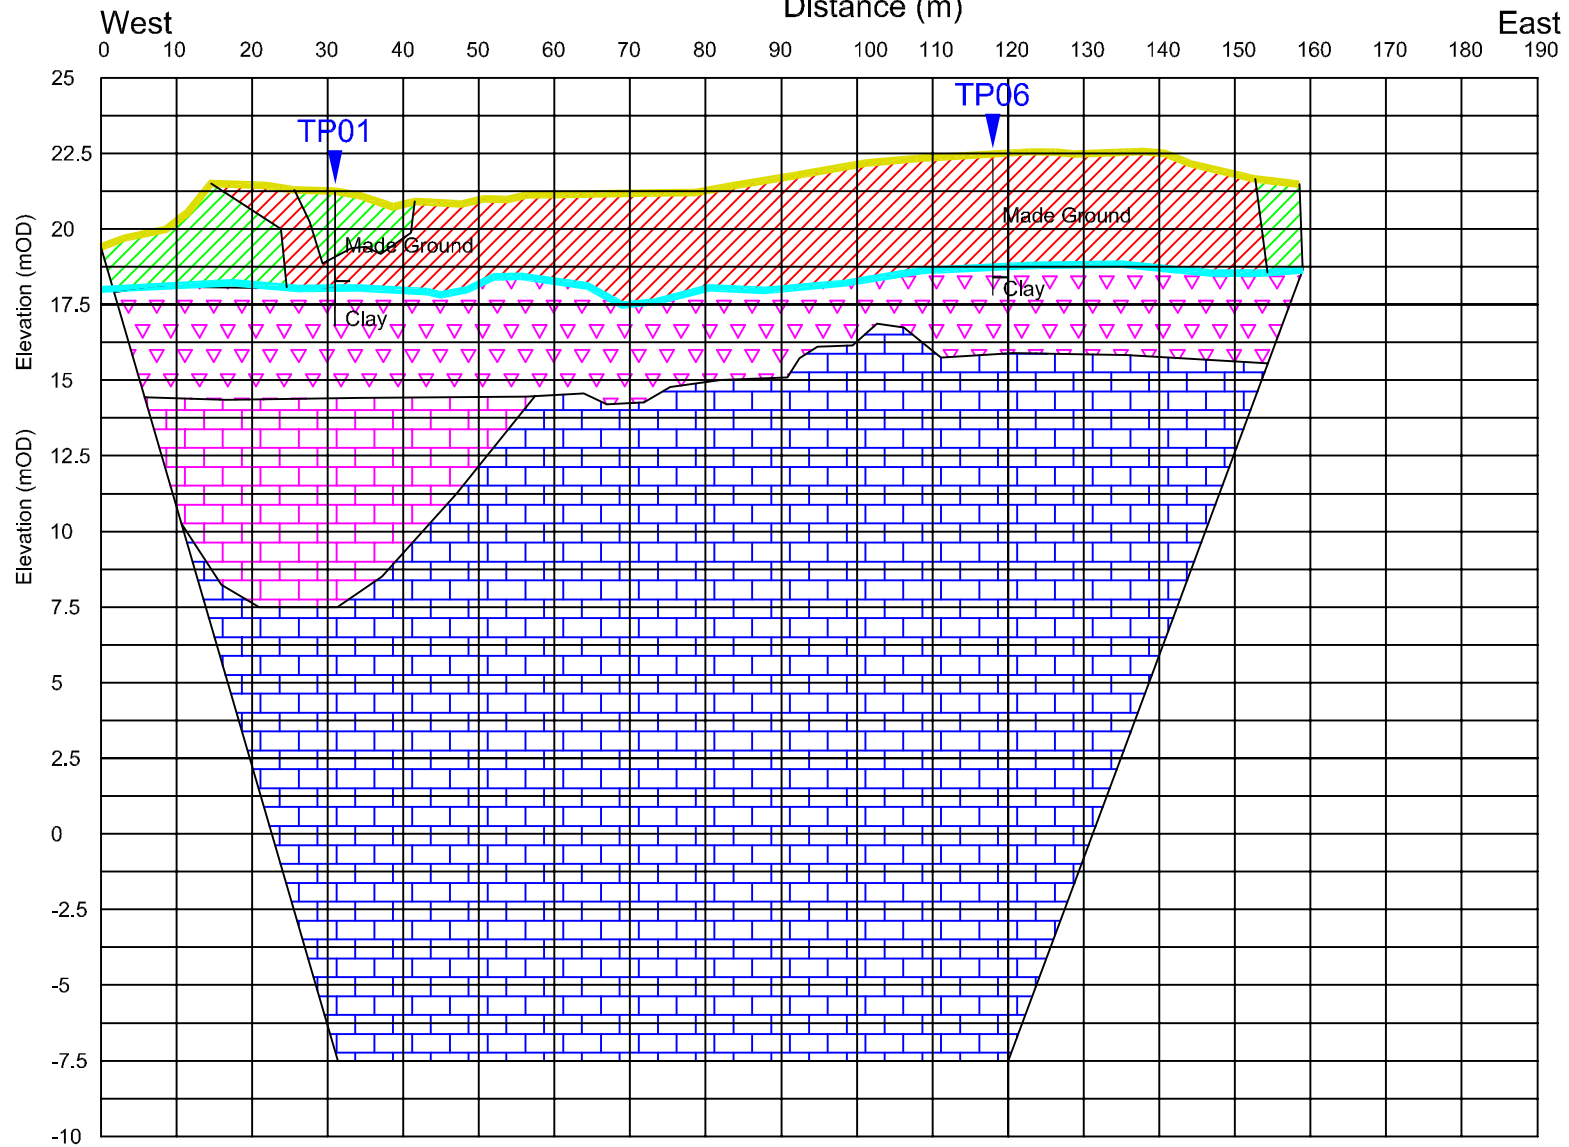


2D-Resistivity Profile R1 and Seismic Refraction Profile S1 Interpretation

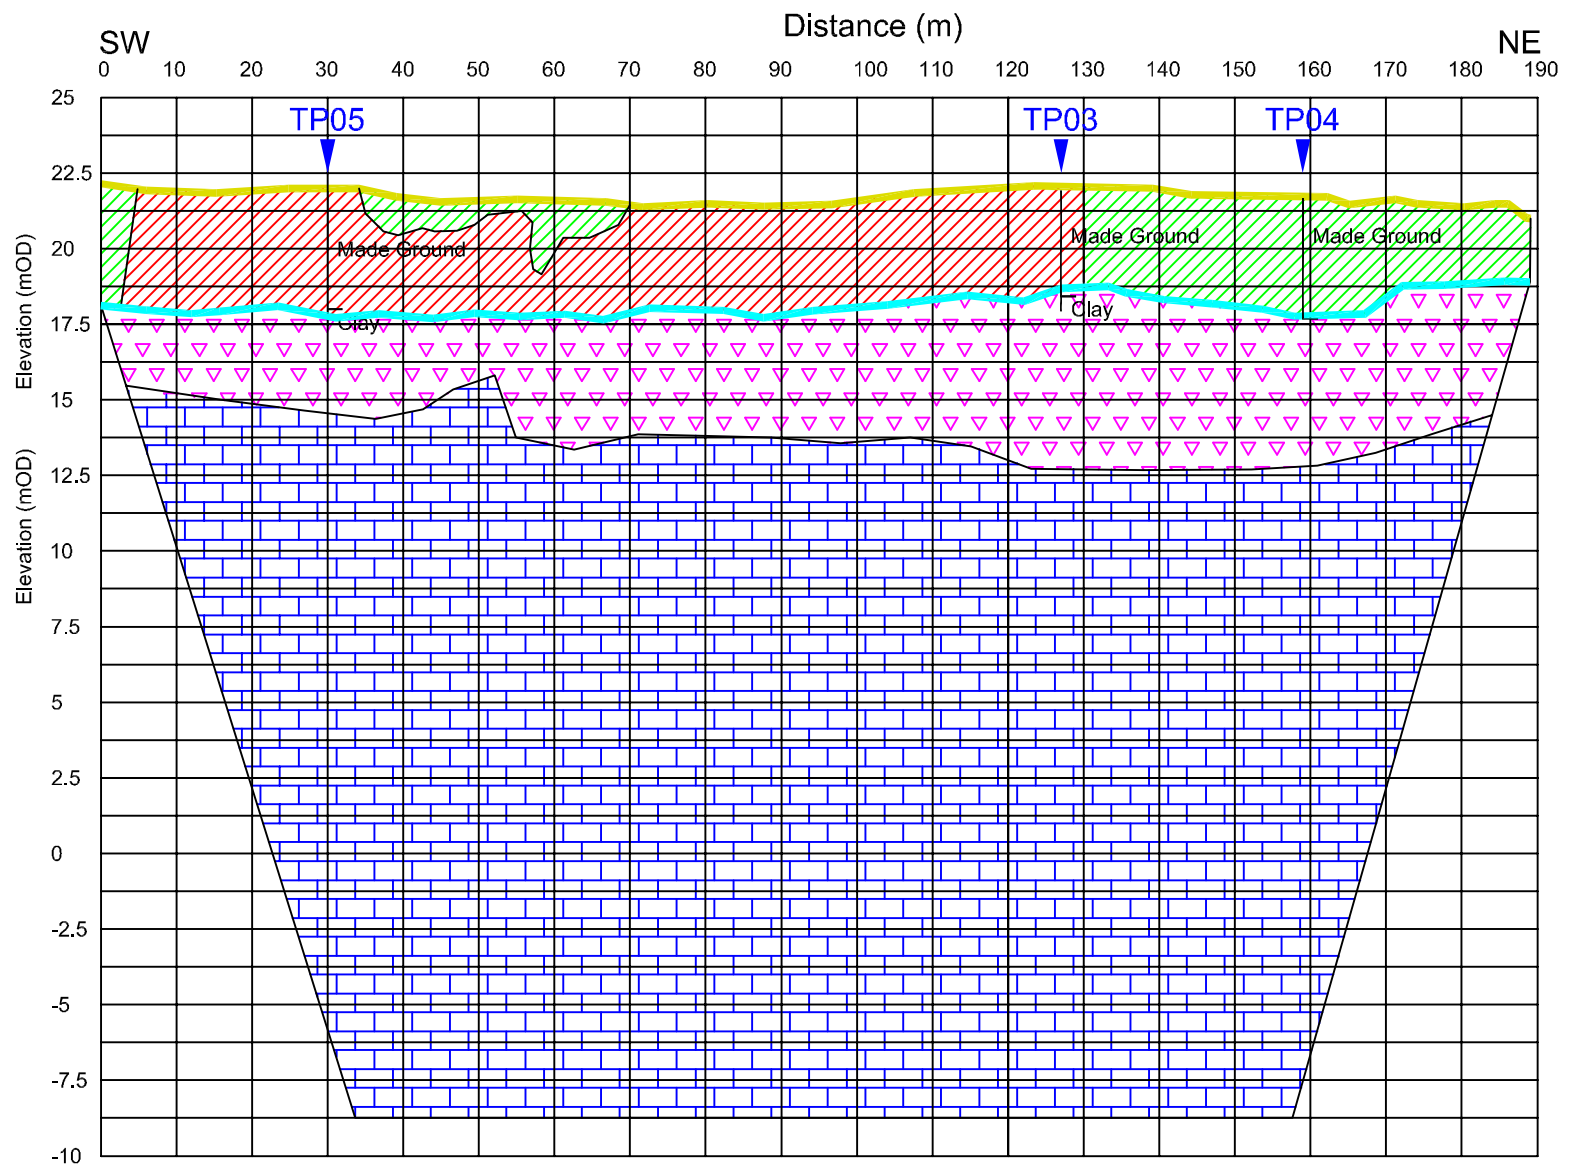

2D-Resistivity Profile R2 and Seismic Refraction Profile S2 Interpretation



Interpretation:

-  1a Waste (Mainly D/I)
-  1b Waste (Mainly C&D, Soil & Rock Fill)
-  2 Overburden with Leachate
-  3a Fresh Limestone
-  3b Limestone with Leachate